


Inter-process Communication (IPC)

# Chapter 3: Processes

---



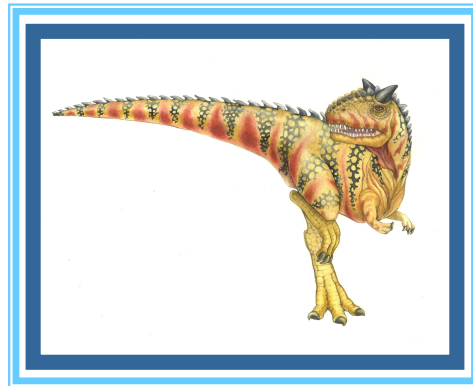

# Interprocess Communication

---


- Processes within a system may be *independent* or *cooperating*
- Cooperating process can affect or be affected by other processes, including sharing data
- Reasons for cooperating processes:
  - Information sharing
  - Computation speedup
  - Modularity
  - Convenience
- Cooperating processes need **interprocess communication (IPC)**
- Two models of IPC
  - **Shared memory**
  - **Message passing**






# Communications Models

(a) Shared memory.

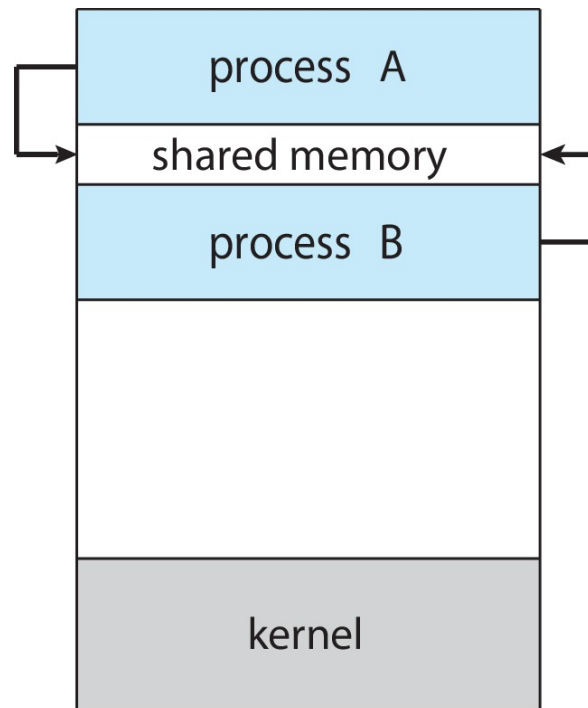

(a)

(b) Message passing.

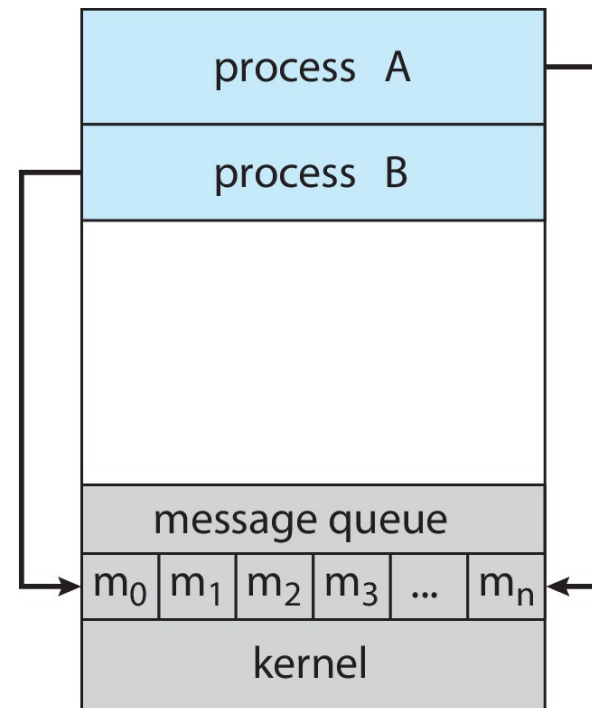

(b)





# Cooperating Processes

---

- **Independent** process cannot affect or be affected by the execution of another process
- **Cooperating** process can affect or be affected by the execution of another process
- Advantages of process cooperation
  - Information sharing
  - Computation speed-up
  - Modularity
  - Convenience





# Producer-Consumer Problem

---

- Paradigm for cooperating processes, *producer* process produces information that is consumed by a *consumer* process
  - **unbounded-buffer** places no practical limit on the size of the buffer
  - **bounded-buffer** assumes that there is a fixed buffer size





## Interprocess Communication – Shared Memory

---

- An area of memory shared among the processes that wish to communicate
- The communication is under the control of the users processes not the operating system.
- Major issues is to provide mechanism that will allow the user processes to synchronize their actions when they access shared memory.
- Synchronization is discussed in great details in Chapters 6 & 7.





# Bounded-Buffer – Shared-Memory Solution

- Shared data

```
#define BUFFER_SIZE 10
typedef struct {
    . . .
} item;

item buffer[BUFFER_SIZE];
int in = 0;
int out = 0;
```

- Solution is correct, but can only use **BUFFER\_SIZE-1** elements





# Producer Process – Shared Memory

---

```
item next_produced;

while (true) {
    /* produce an item in next produced */
    while (((in + 1) % BUFFER_SIZE) == out)
        ; /* do nothing */
    buffer[in] = next_produced;
    in = (in + 1) % BUFFER_SIZE;
}
```







# Consumer Process – Shared Memory

---

```
item next_consumed;

while (true) {
    while (in == out)
        ; /* do nothing */
    next_consumed = buffer[out];
    out = (out + 1) % BUFFER_SIZE;

    /* consume the item in next consumed */
}
```





# Interprocess Communication – Message Passing

---

- Mechanism for processes to communicate and to synchronize their actions
- Message system – processes communicate with each other without resorting to shared variables
- IPC facility provides two operations:
  - **send**(*message*)
  - **receive**(*message*)
- The *message* size is either fixed or variable





## Message Passing (Cont.)

---

- If processes  $P$  and  $Q$  wish to communicate, they need to:
  - Establish a ***communication link*** between them
  - Exchange messages via send/receive
- Implementation issues:
  - How are links established?
  - Can a link be associated with more than two processes?
  - How many links can there be between every pair of communicating processes?
  - What is the capacity of a link?
  - Is the size of a message that the link can accommodate fixed or variable?
  - Is a link unidirectional or bi-directional?





## Message Passing (Cont.)

---

- Implementation of communication link
  - Physical:
    - ▶ Shared memory
    - ▶ Hardware bus
    - ▶ Network
  - Logical:
    - ▶ Direct or indirect
    - ▶ Synchronous or asynchronous
    - ▶ Automatic or explicit buffering





# Direct Communication

---

- Processes must name each other explicitly:
  - **send** ( $P$ , *message*) – send a message to process  $P$
  - **receive**( $Q$ , *message*) – receive a message from process  $Q$
- Properties of communication link
  - Links are established automatically
  - A link is associated with exactly one pair of communicating processes
  - Between each pair there exists exactly one link
  - The link may be unidirectional, but is usually bi-directional





# Indirect Communication

---

- Messages are directed and received from mailboxes (also referred to as ports)
  - Each mailbox has a unique id
  - Processes can communicate only if they share a mailbox
- Properties of communication link
  - Link established only if processes share a common mailbox
  - A link may be associated with many processes
  - Each pair of processes may share several communication links
  - Link may be unidirectional or bi-directional





# Indirect Communication

---

## ■ Operations

- create a new mailbox (port)
- send and receive messages through mailbox
- destroy a mailbox

## ■ Primitives are defined as:

**send**(*A*, *message*) – send a message to mailbox *A*

**receive**(*A*, *message*) – receive a message from mailbox *A*





# Indirect Communication

## ■ Mailbox sharing

- $P_1$ ,  $P_2$ , and  $P_3$  share mailbox A
- $P_1$  sends;  $P_2$  and  $P_3$  receive
- Who gets the message?

## ■ Solutions

- Allow a link to be associated with at most two processes
- Allow only one process at a time to execute a receive operation
- Allow the system to select arbitrarily the receiver. Sender is notified who the receiver was.







# Synchronization

- Message passing may be either blocking or non-blocking
- **Blocking** is considered **synchronous**
  - **Blocking send** -- the sender is blocked until the message is received
  - **Blocking receive** -- the receiver is blocked until a message is available
- **Non-blocking** is considered **asynchronous**
  - **Non-blocking send** -- the sender sends the message and continue
  - **Non-blocking receive** -- the receiver receives:
    - A valid message, or
    - Null message
- Different combinations possible
  - If both send and receive are blocking, we have a **rendezvous**





# Producer – Shared Memory

---

```
message next_produced;  
  
while (true) {  
    /* produce an item in next_produced */  
  
    send(next_produced) ;  
}
```





# Consumer– Shared Memory

---

```
message next_consumed;  
  
while (true) {  
    receive(next_consumed)  
  
    /* consume the item in next_consumed */  
}
```





# Buffering

---

- Queue of messages attached to the link.
- Implemented in one of three ways
  1. Zero capacity – no messages are queued on a link.  
Sender must wait for receiver (rendezvous)
  2. Bounded capacity – finite length of  $n$  messages  
Sender must wait if link full
  3. Unbounded capacity – infinite length  
Sender never waits





# Examples of IPC Systems - POSIX

---

## ■ POSIX Shared Memory

- Process first creates shared memory segment  
`shm_fd = shm_open(name, O_CREAT | O_RDWR, 0666);`
- Also used to open an existing segment
- Set the size of the object

`ftruncate(shm_fd, 4096);`

- Use `mmap()` to memory-map a file pointer to the shared memory object
- Reading and writing to shared memory is done by using the pointer returned by `mmap()`.





# IPC POSIX Producer

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <fcntl.h>
#include <sys/shm.h>
#include <sys/stat.h>

int main()
{
    /* the size (in bytes) of shared memory object */
    const int SIZE = 4096;
    /* name of the shared memory object */
    const char *name = "OS";
    /* strings written to shared memory */
    const char *message_0 = "Hello";
    const char *message_1 = "World!";

    /* shared memory file descriptor */
    int shm_fd;
    /* pointer to shared memory object */
    void *ptr;

    /* create the shared memory object */
    shm_fd = shm.open(name, O_CREAT | O_RDWR, 0666);

    /* configure the size of the shared memory object */
    ftruncate(shm_fd, SIZE);

    /* memory map the shared memory object */
    ptr = mmap(0, SIZE, PROT_WRITE, MAP_SHARED, shm_fd, 0);

    /* write to the shared memory object */
    sprintf(ptr, "%s", message_0);
    ptr += strlen(message_0);
    sprintf(ptr, "%s", message_1);
    ptr += strlen(message_1);

    return 0;
}
```





# IPC POSIX Consumer

```
#include <stdio.h>
#include <stdlib.h>
#include <fcntl.h>
#include <sys/shm.h>
#include <sys/stat.h>

int main()
{
    /* the size (in bytes) of shared memory object */
    const int SIZE = 4096;
    /* name of the shared memory object */
    const char *name = "OS";
    /* shared memory file descriptor */
    int shm_fd;
    /* pointer to shared memory object */
    void *ptr;

    /* open the shared memory object */
    shm_fd = shm_open(name, O_RDONLY, 0666);

    /* memory map the shared memory object */
    ptr = mmap(0, SIZE, PROT_READ, MAP_SHARED, shm_fd, 0);

    /* read from the shared memory object */
    printf("%s", (char *)ptr);

    /* remove the shared memory object */
    shm_unlink(name);

    return 0;
}
```





# Examples of IPC Systems - Mach

---

- Mach communication is message based
  - Even system calls are messages
  - Each task gets two ports at creation- Kernel and Notify
  - Messages are sent and received using the `mach_msg()` function
  - Ports needed for communication, created via `mach_port_allocate()`
  - Send and receive are flexible, for example four options if mailbox full:
    - ▶ Wait indefinitely
    - ▶ Wait at most n milliseconds
    - ▶ Return immediately
    - ▶ Temporarily cache a message







# Mach Messages

---

```
#include<mach/mach.h>

struct message {
    mach_msg_header_t header;
    int data;
};

mach port t client;
mach port t server;
```





# Mach Message Passing - Client

---

```
/* Client Code */

struct message message;

// construct the header
message.header.msgh_size = sizeof(message);
message.header.msgh_remote_port = server;
message.header.msgh_local_port = client;

// send the message
mach_msg(&message.header, // message header
        MACH_SEND_MSG, // sending a message
        sizeof(message), // size of message sent
        0, // maximum size of received message - unnecessary
        MACH_PORT_NULL, // name of receive port - unnecessary
        MACH_MSG_TIMEOUT_NONE, // no time outs
        MACH_PORT_NULL // no notify port
    );
```





# Mach Message Passing - Server

---

```
/* Server Code */

struct message message;

// receive the message
mach_msg(&message.header, // message header
        MACH_RCV_MSG, // sending a message
        0, // size of message sent
        sizeof(message), // maximum size of received message
        server, // name of receive port
        MACH_MSG_TIMEOUT_NONE, // no time outs
        MACH_PORT_NULL // no notify port
);
```






## Examples of IPC Systems – Windows

- Message-passing centric via **advanced local procedure call (LPC)** facility
  - Only works between processes on the same system
  - Uses ports (like mailboxes) to establish and maintain communication channels
  - Communication works as follows:
    - ▶ The client opens a handle to the subsystem's **connection port** object.
    - ▶ The client sends a connection request.
    - ▶ The server creates two private **communication ports** and returns the handle to one of them to the client.
    - ▶ The client and server use the corresponding port handle to send messages or callbacks and to listen for replies.





# Local Procedure Calls in Windows

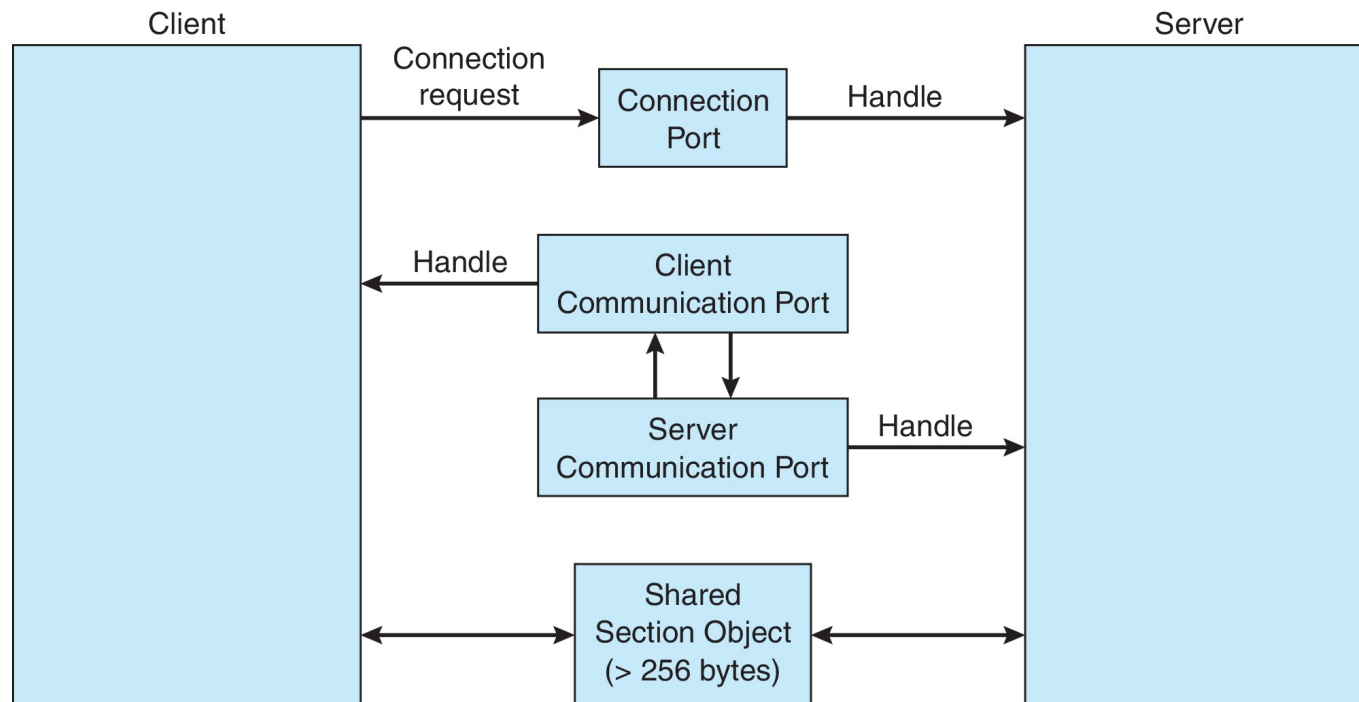



# Pipes


- Acts as a conduit allowing two processes to communicate
- Issues:
  - Is communication unidirectional or bidirectional?
  - In the case of two-way communication, is it half or full-duplex?
  - Must there exist a relationship (i.e., ***parent-child***) between the communicating processes?
  - Can the pipes be used over a network?
- **Ordinary pipes** – cannot be accessed from outside the process that created it. Typically, a parent process creates a pipe and uses it to communicate with a child process that it created.
- **Named pipes** – can be accessed without a parent-child relationship.





# Ordinary Pipes

- Ordinary Pipes allow communication in standard producer-consumer style
- Producer writes to one end (the **write-end** of the pipe)
- Consumer reads from the other end (the **read-end** of the pipe)
- Ordinary pipes are therefore unidirectional
- Require parent-child relationship between communicating processes

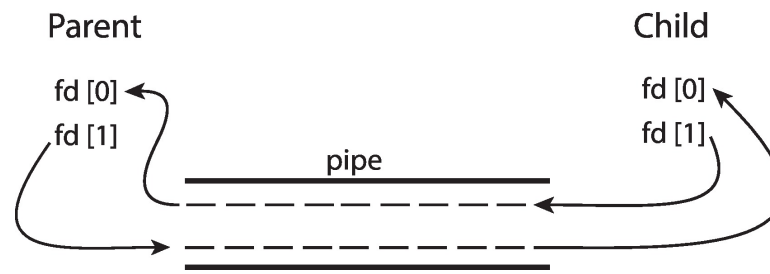

- Windows calls these **anonymous pipes**





# Named Pipes

---

- Named Pipes are more powerful than ordinary pipes
- Communication is bidirectional
- No parent-child relationship is necessary between the communicating processes
- Several processes can use the named pipe for communication
- Provided on both UNIX and Windows systems







# Communications in Client-Server Systems

---

- Sockets
- Remote Procedure Calls





# Sockets


---

- A **socket** is defined as an endpoint for communication
- Concatenation of IP address and **port** – a number included at start of message packet to differentiate network services on a host
- The socket **161.25.19.8:1625** refers to port **1625** on host **161.25.19.8**
- Communication consists between a pair of sockets
- All ports below 1024 are **well known**, used for standard services
- Special IP address 127.0.0.1 (**loopback**) to refer to system on which process is running





# Socket Communication

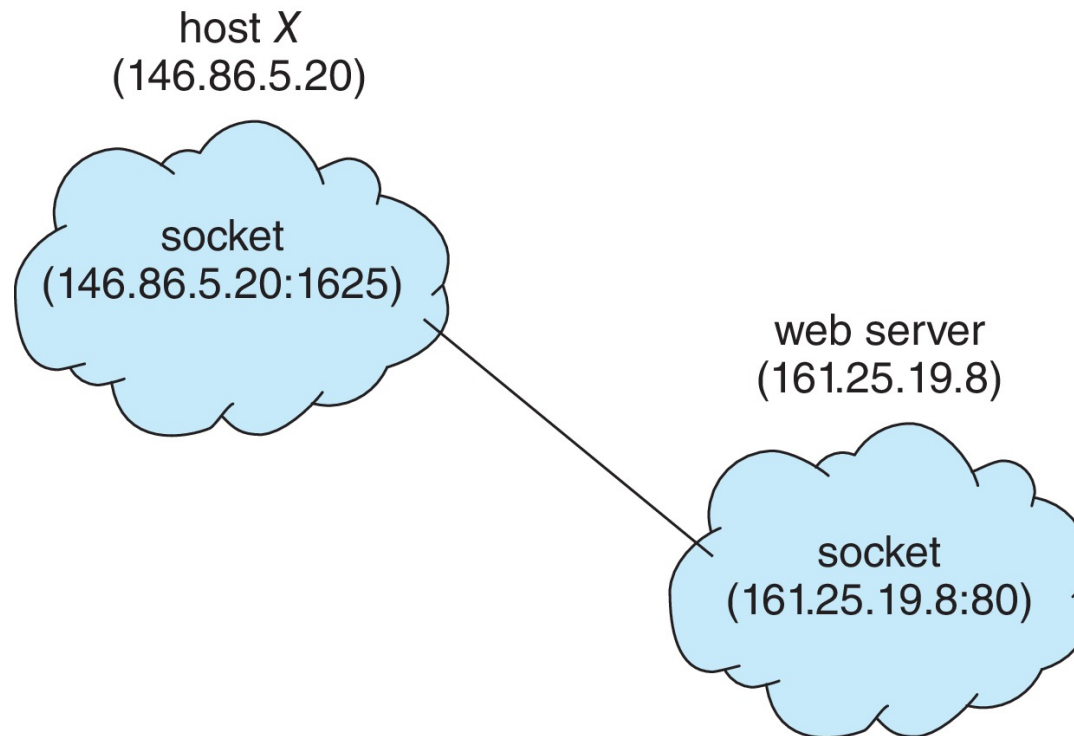



# Sockets in Java

- Three types of sockets
  - **Connection-oriented (TCP)**
  - **Connectionless (UDP)**
  - **MulticastSocket** class— data can be sent to multiple recipients

- Consider this “Date” server in Java:

```
import java.net.*;
import java.io.*;

public class DateServer
{
    public static void main(String[] args) {
        try {
            ServerSocket sock = new ServerSocket(6013);

            /* now listen for connections */
            while (true) {
                Socket client = sock.accept();

                PrintWriter pout = new
                    PrintWriter(client.getOutputStream(), true);

                /* write the Date to the socket */
                pout.println(new java.util.Date().toString());

                /* close the socket and resume */
                /* listening for connections */
                client.close();
            }
        }
        catch (IOException ioe) {
            System.err.println(ioe);
        }
    }
}
```





# Sockets in Java

## The equivalent Date client

```
import java.net.*;
import java.io.*;

public class DateClient
{
    public static void main(String[] args) {
        try {
            /* make connection to server socket */
            Socket sock = new Socket("127.0.0.1",6013);

            InputStream in = sock.getInputStream();
            BufferedReader bin = new
                BufferedReader(new InputStreamReader(in));

            /* read the date from the socket */
            String line;
            while ( (line = bin.readLine()) != null)
                System.out.println(line);

            /* close the socket connection*/
            sock.close();
        }
        catch (IOException ioe) {
            System.err.println(ioe);
        }
    }
}
```





# Remote Procedure Calls

---

- Remote procedure call (RPC) abstracts procedure calls between processes on networked systems
  - Again uses ports for service differentiation
- **Stubs** – client-side proxy for the actual procedure on the server
- The client-side stub locates the server and **marshalls** the parameters
- The server-side stub receives this message, unpacks the marshalled parameters, and performs the procedure on the server
- On Windows, stub code compile from specification written in **Microsoft Interface Definition Language (MIDL)**






## Remote Procedure Calls (Cont.)

- Data representation handled via **External Data Representation (XDL)** format to account for different architectures
  - **Big-endian** and **little-endian**
- Remote communication has more failure scenarios than local
  - Messages can be delivered ***exactly once*** rather than ***at most once***
- OS typically provides a rendezvous (or **matchmaker**) service to connect client and server





# Execution of RPC

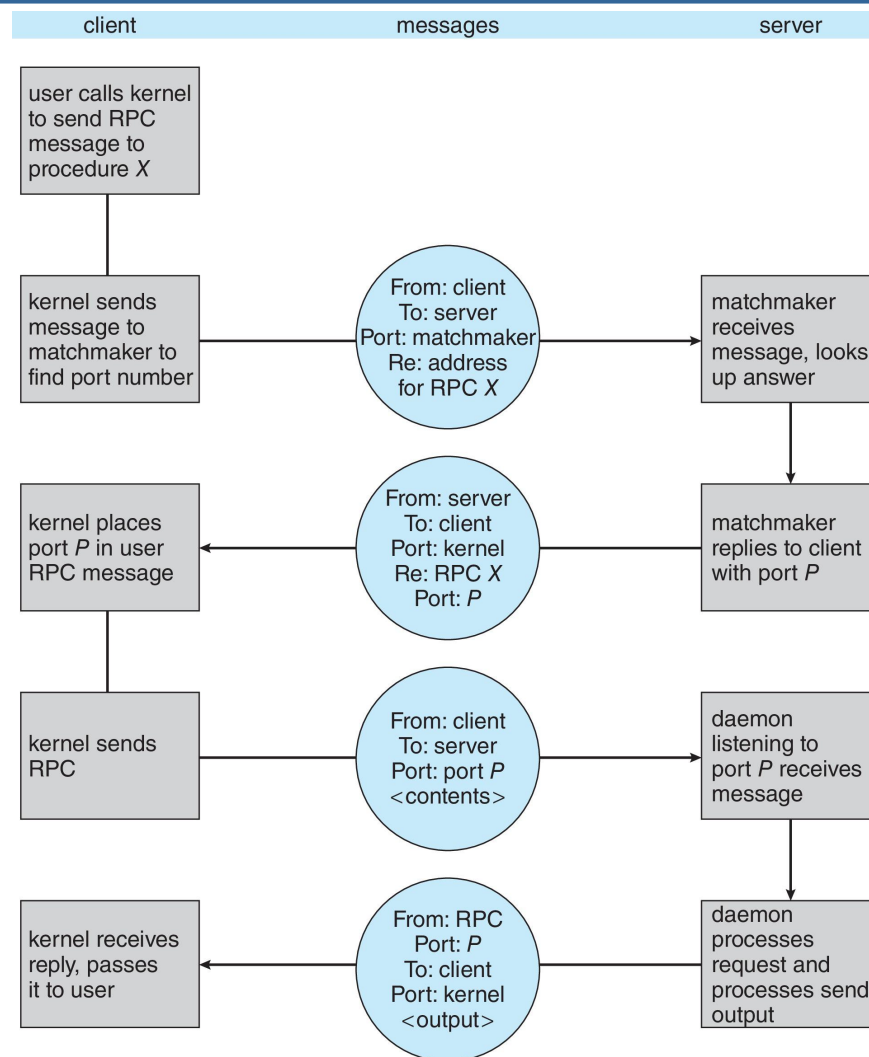



# End of Chapter 3

---

