VIEW A PLAN

scale 2:1

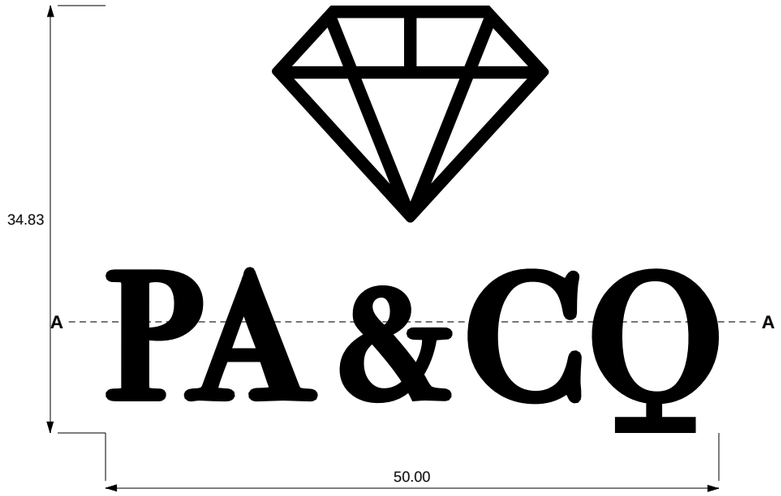

VIEW B FRONT ELEVATION

scale 2:1 z x10



VIEW C SIDE ELEVATION

scale 2:1 z x10

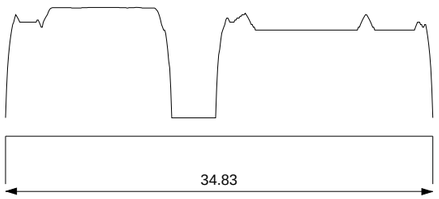

BODIES

six separate solids, not joined

item	body	width	height	counters
1	P	7.96	10.75	1
2	A	10.92	10.97	1
3	diamond	22.58	17.69	7
4	ampersand	9.19	9.60	2
5	C	9.29	11.04	0
6	O with bar	10.35	13.40	1

SECTION A-A

scale 20:1

through the thinnest stroke, 1.05 mm

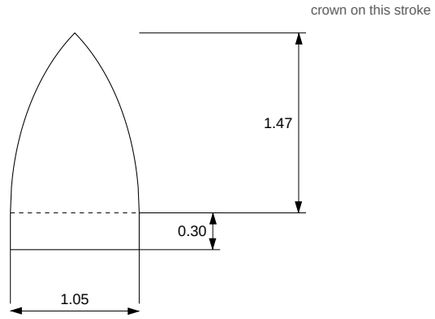

A stroke narrower than 2.50 mm runs out of width before the dome reaches full height, so the two faces meet in a ridge along the centre of the stroke. This is correct and must not be flattened.

DOME PROFILE

elliptical, struck from the edge of every stroke



z = 1.80 x sqrt(1 - (1 - d / 1.25)^2) for d <= 1.25 mm, z = 1.80 beyond

d = distance from the edge of the stroke, in plan

CROWN HEIGHT BY STROKE WIDTH

stroke width	crown height	note
1.05 mm	1.47 mm	thinnest in the artwork
1.25 mm	1.56 mm	
1.50 mm	1.65 mm	
1.75 mm	1.72 mm	
2.00 mm	1.76 mm	
2.37 mm	1.80 mm	thickest in the artwork
2.50 mm	1.80 mm	full height from here

NOTES

1. All dimensions in millimetres. Do not scale from this drawing.
2. Part is six separate bodies: P, A, ampersand, C, O with bar, diamond.
3. Outline is fixed. No stroke may be thinned; 1.05 mm is the minimum and is already at the limit.
4. Top surface domed per SECTION A-A. Flat underside.
5. Finish: satin silver, uniform. No polished or mirror areas.
6. Supplied as a closed STL in millimetres: paco-logo-dome1.80-base0.30.stl
7. General tolerance +/-0.05 mm. Dome height +/-0.10 mm.

PA & CO - LOGO, DOMED				SHEET	1 of 1
FINISH	satin silver	UNITS	mm	SCALE	as noted
OVERALL	50.00 x 34.83 x 2.10			MIN. STROKE	1.05