
VIEW A PLAN

SCALE 2:1



VIEW B FRONT ELEVATION

SCALE 2:1

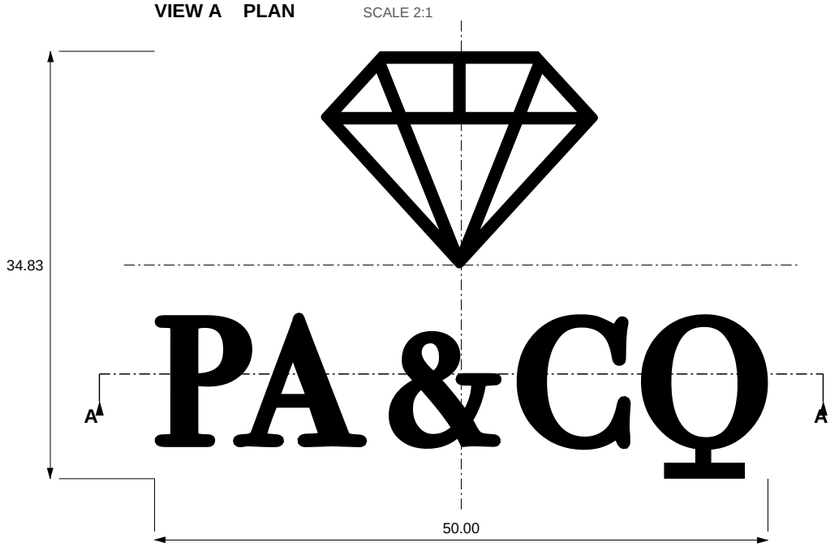

VIEW C SIDE ELEVATION


SCALE 2:1



BODY SCHEDULE

six separate solids, not joined

ITEM	BODY	WIDTH	HEIGHT	COUNTERS
1	P	7.96	10.75	1
2	A	10.92	10.97	1
3	DIAMOND	22.58	17.69	7
4	AMPERSAND	9.19	9.60	2
5	C	9.29	11.04	0
6	O WITH BAR	10.35	13.40	1

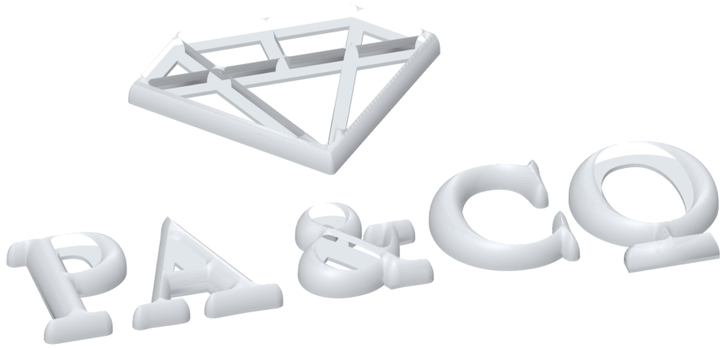


ISOMETRIC VIEW

SECTION A-A

SCALE 20:1

cut through the thinnest stroke, 1.05 mm wide


CROWN ON A 1.05 STROKE

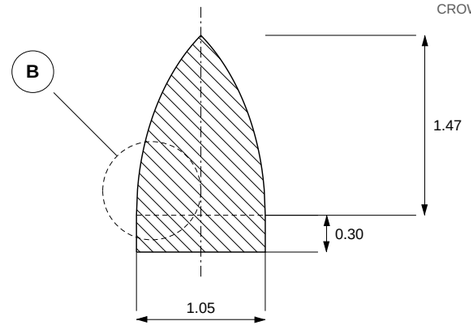

A stroke narrower than 2.50 mm runs out of width before the dome reaches full height, so the two faces meet in a ridge on the centre line. This is correct and must not be flattened or blended.

DETAIL B DOME PROFILE

struck from the edge of every stroke

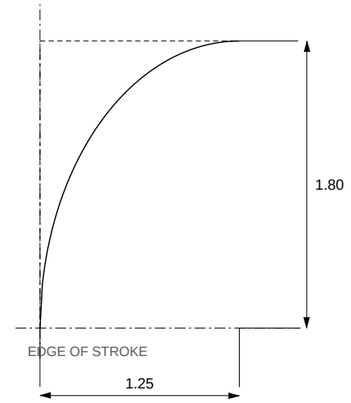

$z = 1.80 \times \sqrt{1 - (1 - d / 1.25)^2}$

for d <= 1.25 mm; z = 1.80 beyond. d is measured in plan from the edge of the stroke.

CROWN HEIGHT BY STROKE WIDTH

STROKE WIDTH	CROWN	NOTE
1.05	1.47	thinnest in artwork
1.50	1.65	
2.00	1.76	
2.37	1.80	thickest in artwork
2.50	1.80	full height from here

NOTES

1. All dimensions in millimetres. Do not scale from this drawing.
2. Six separate bodies. They do not touch and must not be joined.
3. Outline is fixed. No stroke may be thinned; 1.05 mm is the minimum and is already at the limit.
4. Top surface domed per DETAIL B. Underside flat, no draft.
5. Finish satin silver, uniform. No polished or mirror areas.
6. Geometry of record is the STL: paco-logo-dome1.80-base0.30.stl
7. General tolerance +/-0.05. Crown height +/-0.10.

PA & CO LOGO, DOMED

THIRD ANGLE

MATERIAL	per supplier	UNITS	mm	DWG NO.	PACO-3D-01
FINISH	satin silver	MIN STROKE	1.05	SCALE	AS NOTED
OVERALL	50.00 x 34.83 x 2.10	TOLERANCE	+/-0.05	SHEET	1 OF 1
				REV	A