R_MU_Apt_MR_post2011_rectangular

VERSION | DATE
2026-06-09

SECTION 1 — MODEL DESCRIPTION

BUILDING DESCRIPTION

Sector	Residential
Building type	Multi-Unit
Building subtype	Apartment - MR
Vintage	D_Post2011

3D MODEL

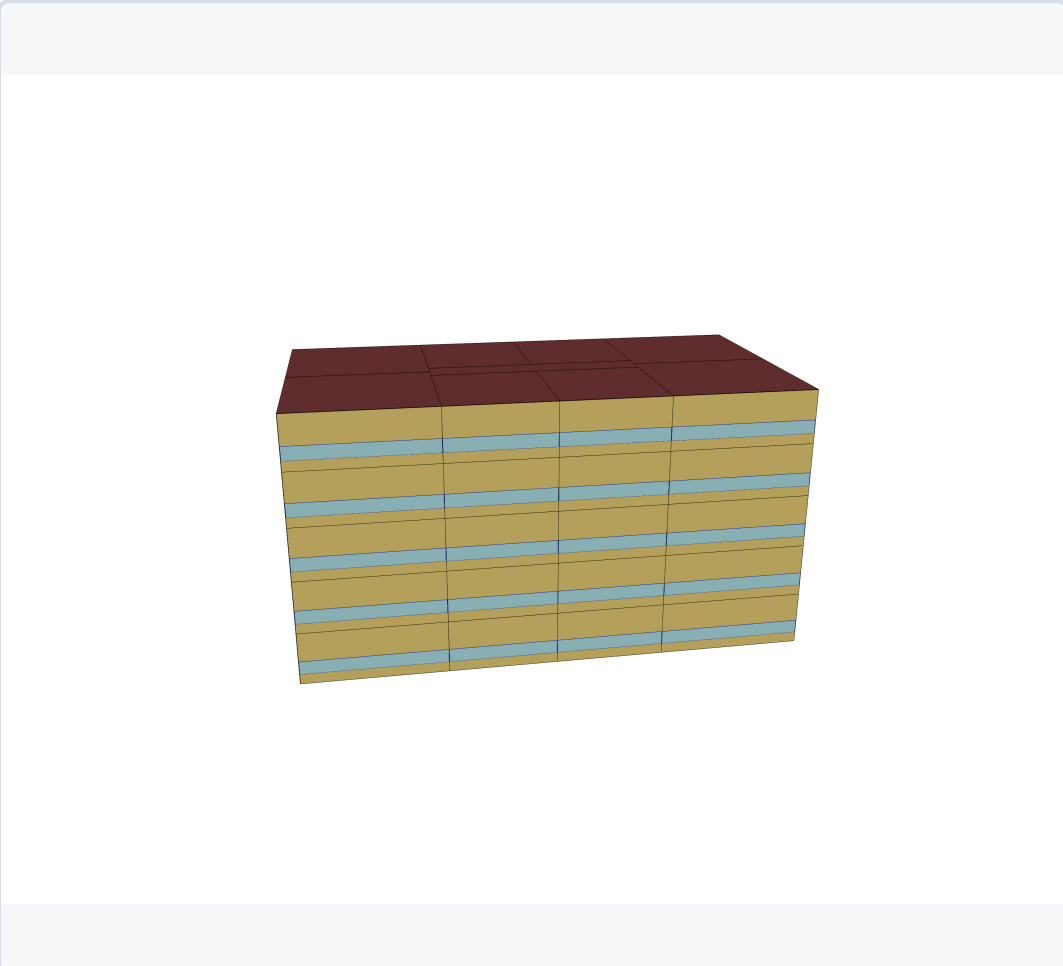

Three-dimensional geometric representation of the building model used for energy simulation and performance analysis.

BUILDING CHARACTERISTICS

Floor Area [m²]	3852
Climate zone	6A

HVAC SYSTEM

Cooling system	Central Electric Heat Pump System
Heating system	Central Heat Pump / Boiler
Ventilation system	Corridor Exhaust + Fresh Air Make-Up
Typical COP cooling	3.50 – 5.00

INSULATION & AIR TIGHTNESS

Exterior walls [W/m²/K]	0.32
Interior walls [W/m²/K]	2.51
Roof [W/m²/K]	0.24
Slabs [W/m²/K]	0.22
Infiltration [m³/h/m²]	2.0

GLAZING

Glazing [W/m²/K]	2.38
SHGC	0.4

WINDOW-TO-WALL RATIO

Average [%]	25.0

ANNUAL END USES — ELECTRICITY [kWh]

END USE	[kWh/year]
Heating	99670
Cooling	30906
Interior Lighting	14175
Interior Equipment	259344
Fans	2700
Total End Uses	406795

MONTHLY CONSUMPTION BY END USE

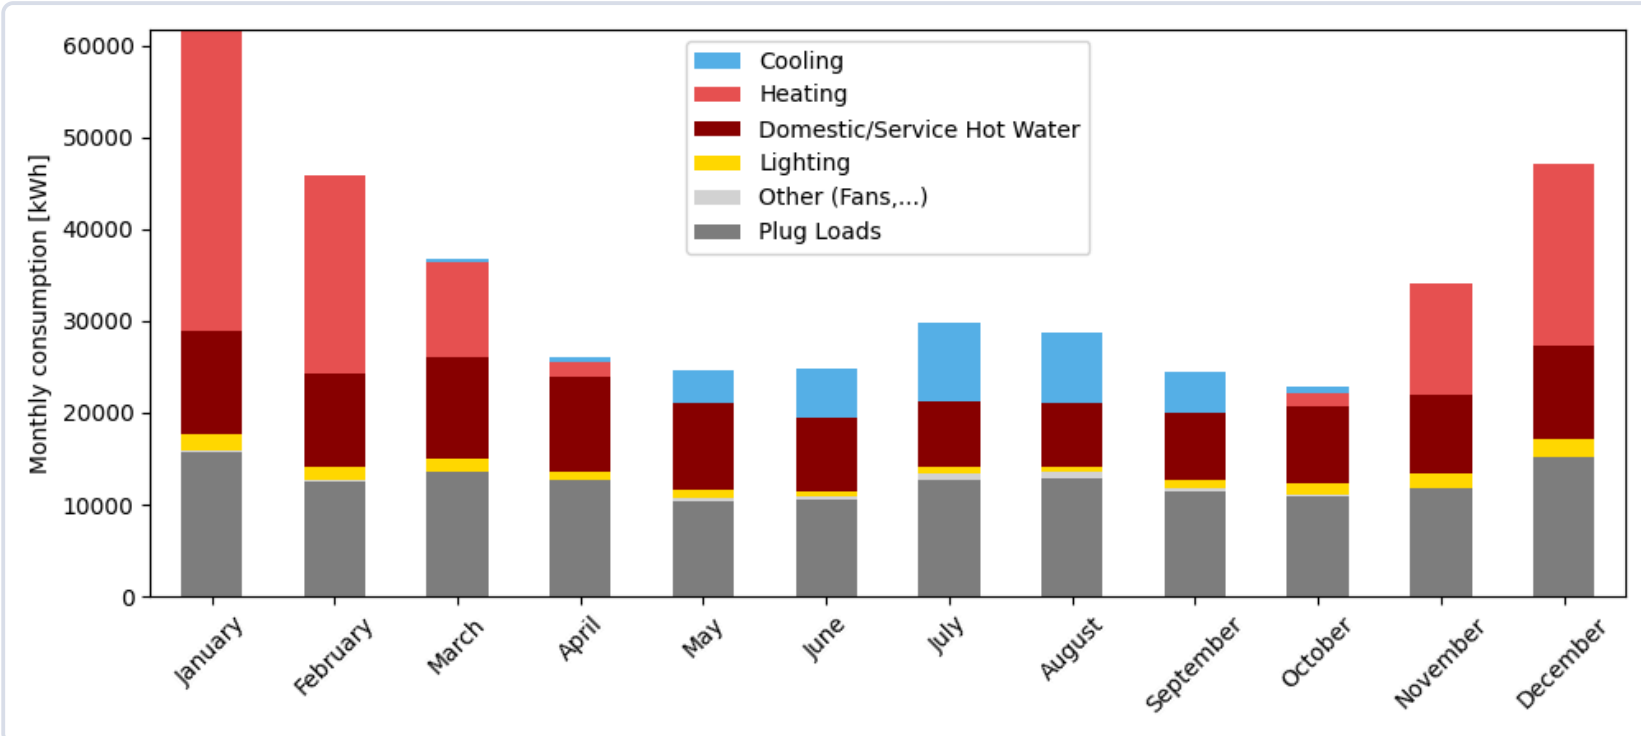

Monthly energy consumption breakdown by end use, showing the contribution of heating, cooling, lighting, domestic hot water, plug loads, and auxiliary systems throughout the year.

AVERAGE DAILY PROFILE BY USAGE

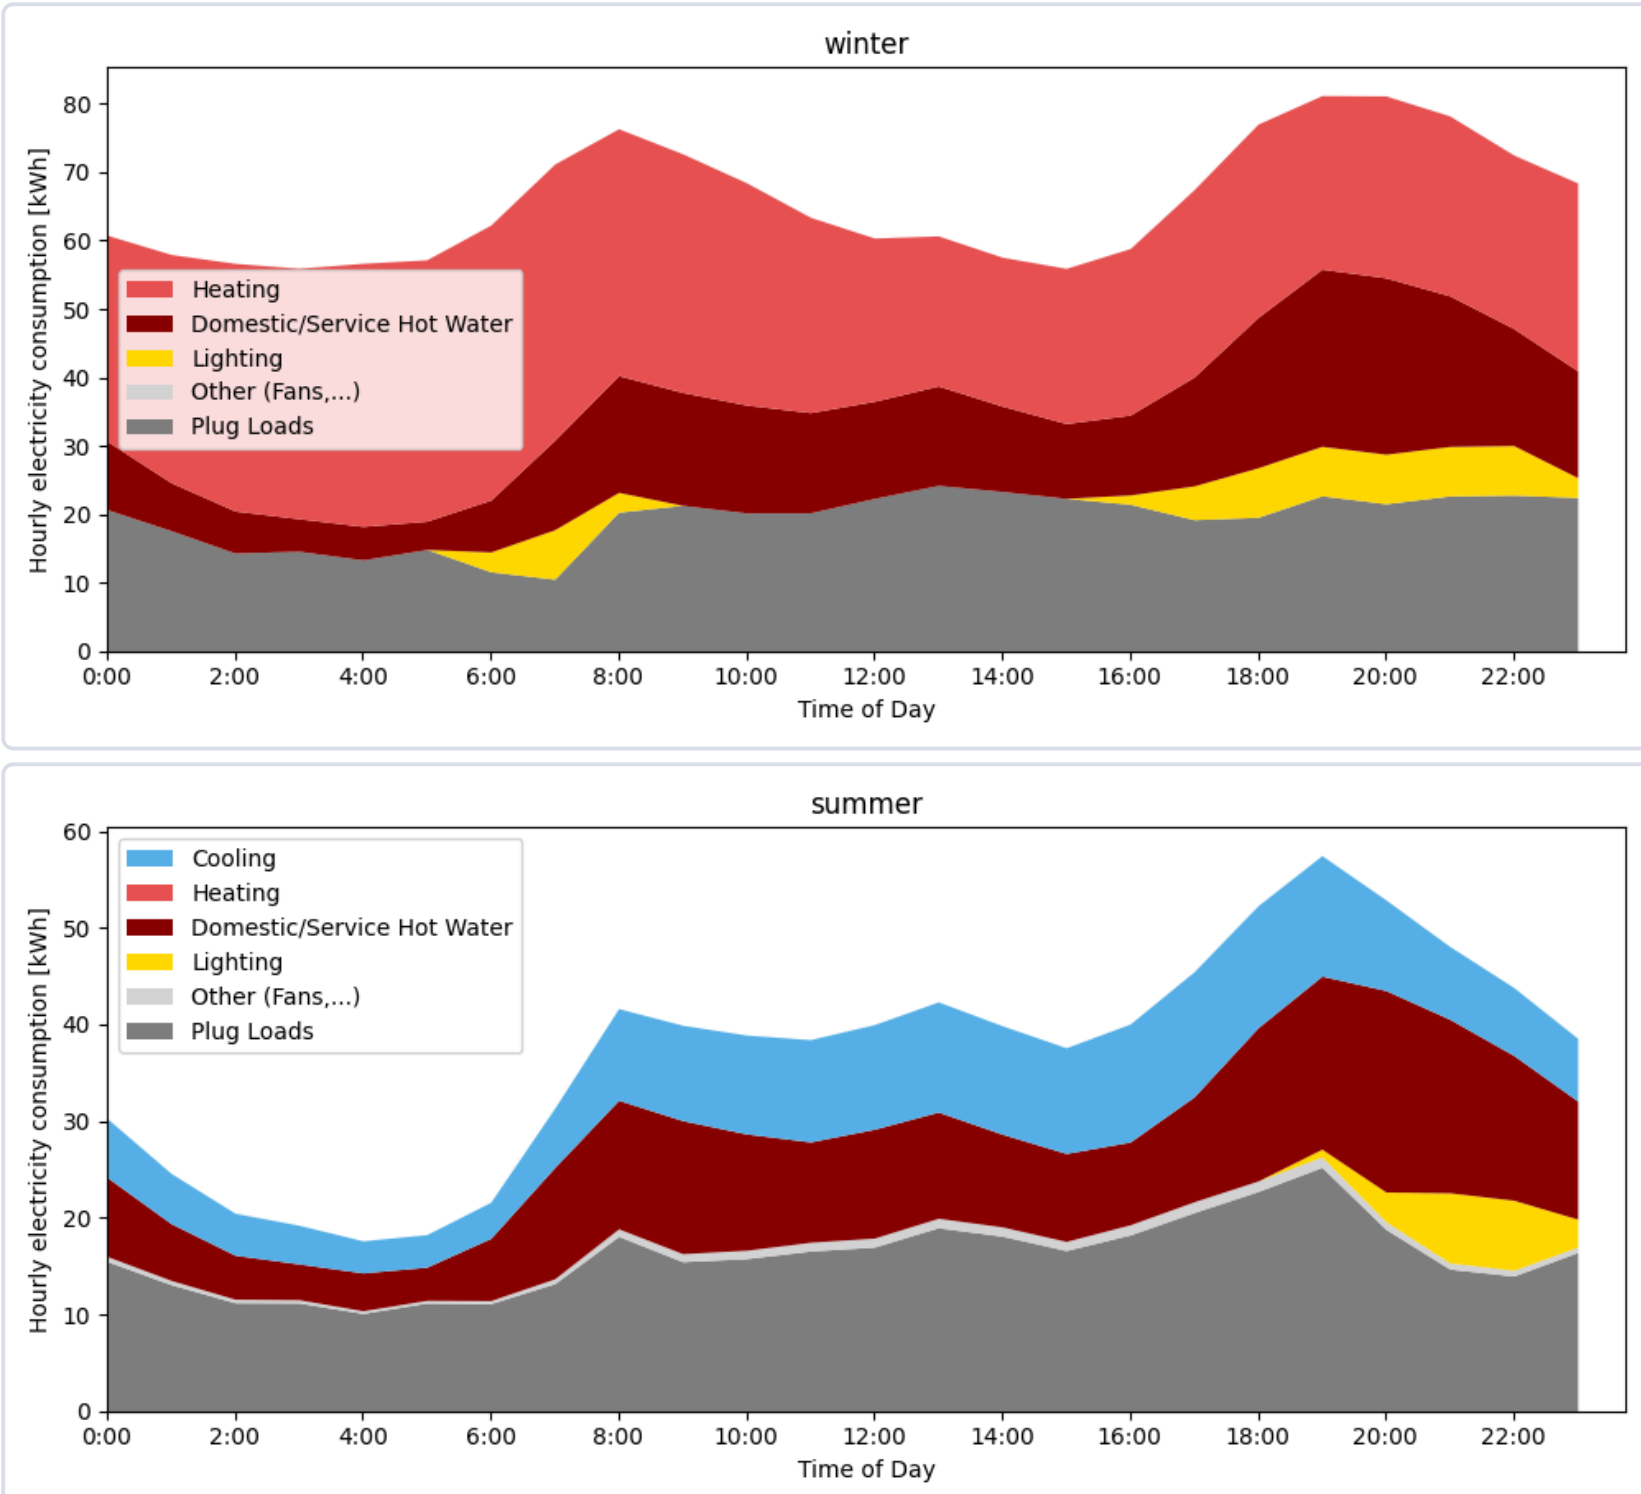

Average daily consumption profile for winter and summer, showing the contribution of cooling, lighting, domestic hot water, plug loads, and auxiliary systems throughout an average winter and summer day.

ENERGY USE INTENSITY	TOTAL CONSUMPTION	ELECTRICITY	NATURAL GAS
106 kWh/m²/yr	406792 kWh/yr	406795 kWh/yr	0 kWh/yr

DONNÉES DE RÉFÉRENCE

The reference data used for the comparison come from a dataset of more than 60,000 residential electricity meters, combined with metadata. Filters were applied to ensure consistency with the building type and subtype of this card, as well as to exclude end uses such as pool, spa, and electric vehicle charging.

DAILY PROFILE

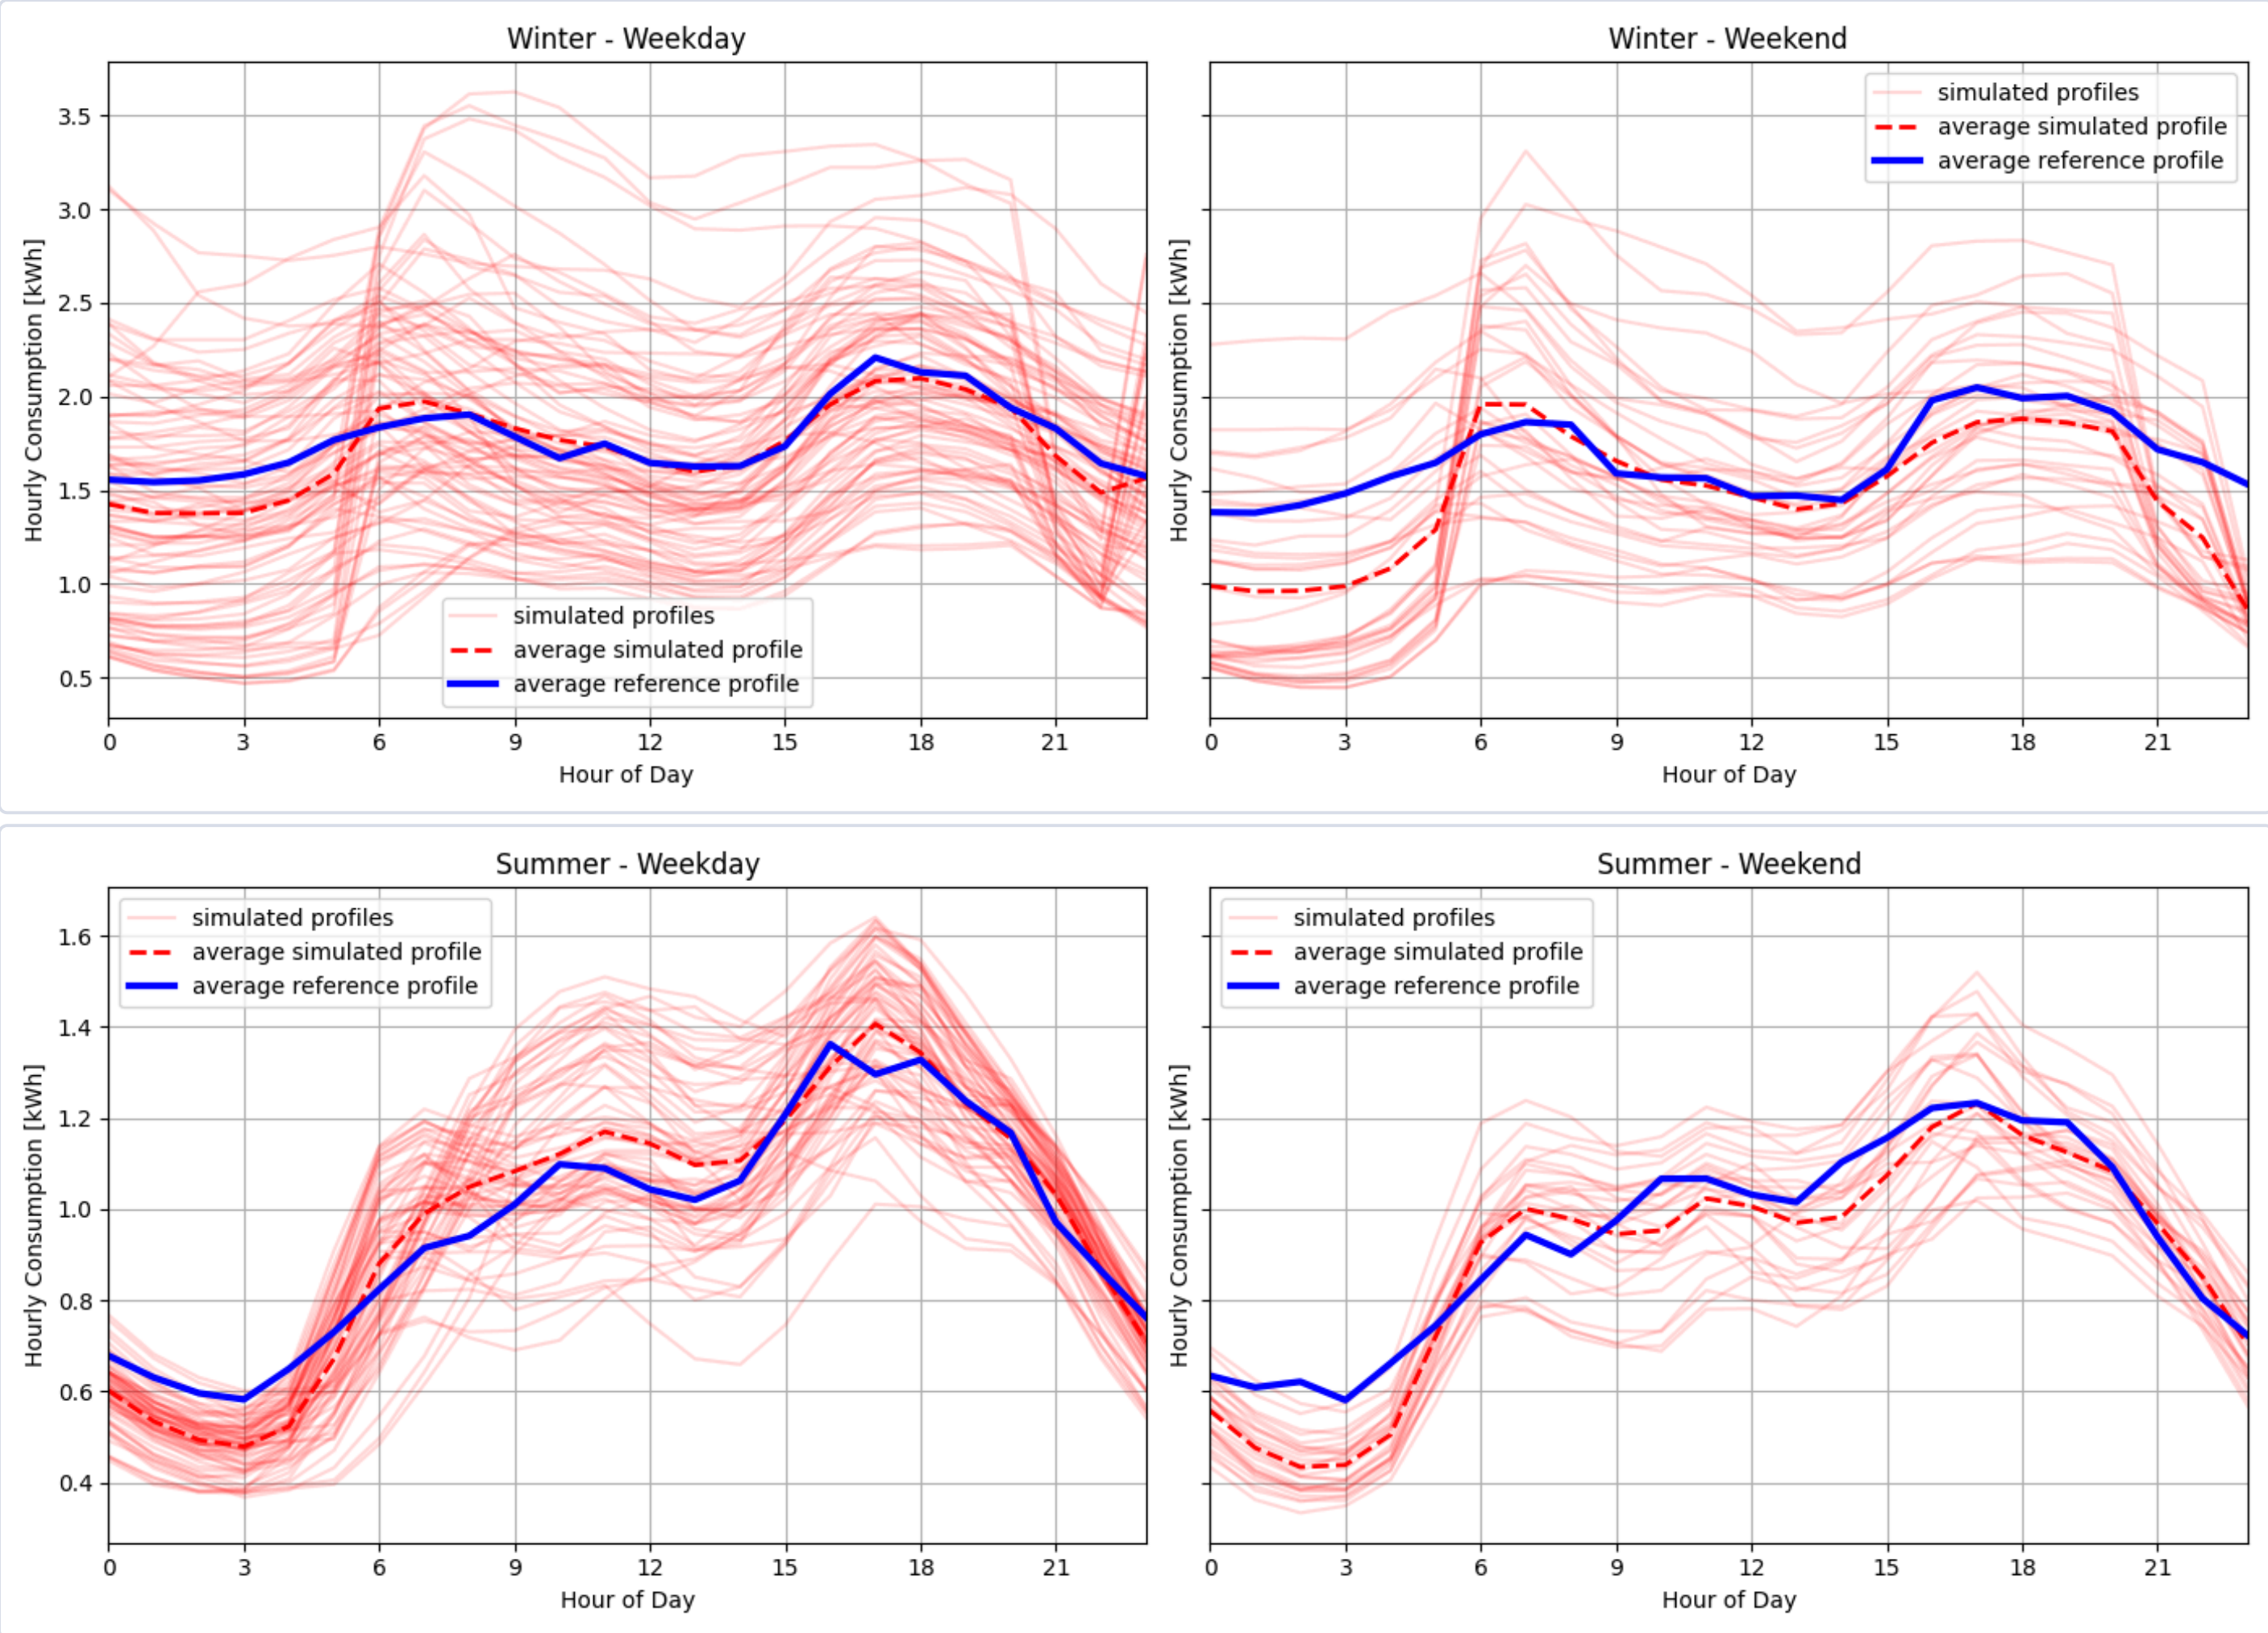

Daily consumption profiles for summer and winter comparing simulated hourly energy use with the reference data. Red lines represent individual days from the model for the given period, the red dashed line indicates the average simulated profile, and the blue line shows the average profile of the reference data. The figures on the left represent weekdays, while the figures on the right represents weekends.

DAILY CONSUMPTION VS. DAILY AVERAGE OUTDOOR TEMPERATURE

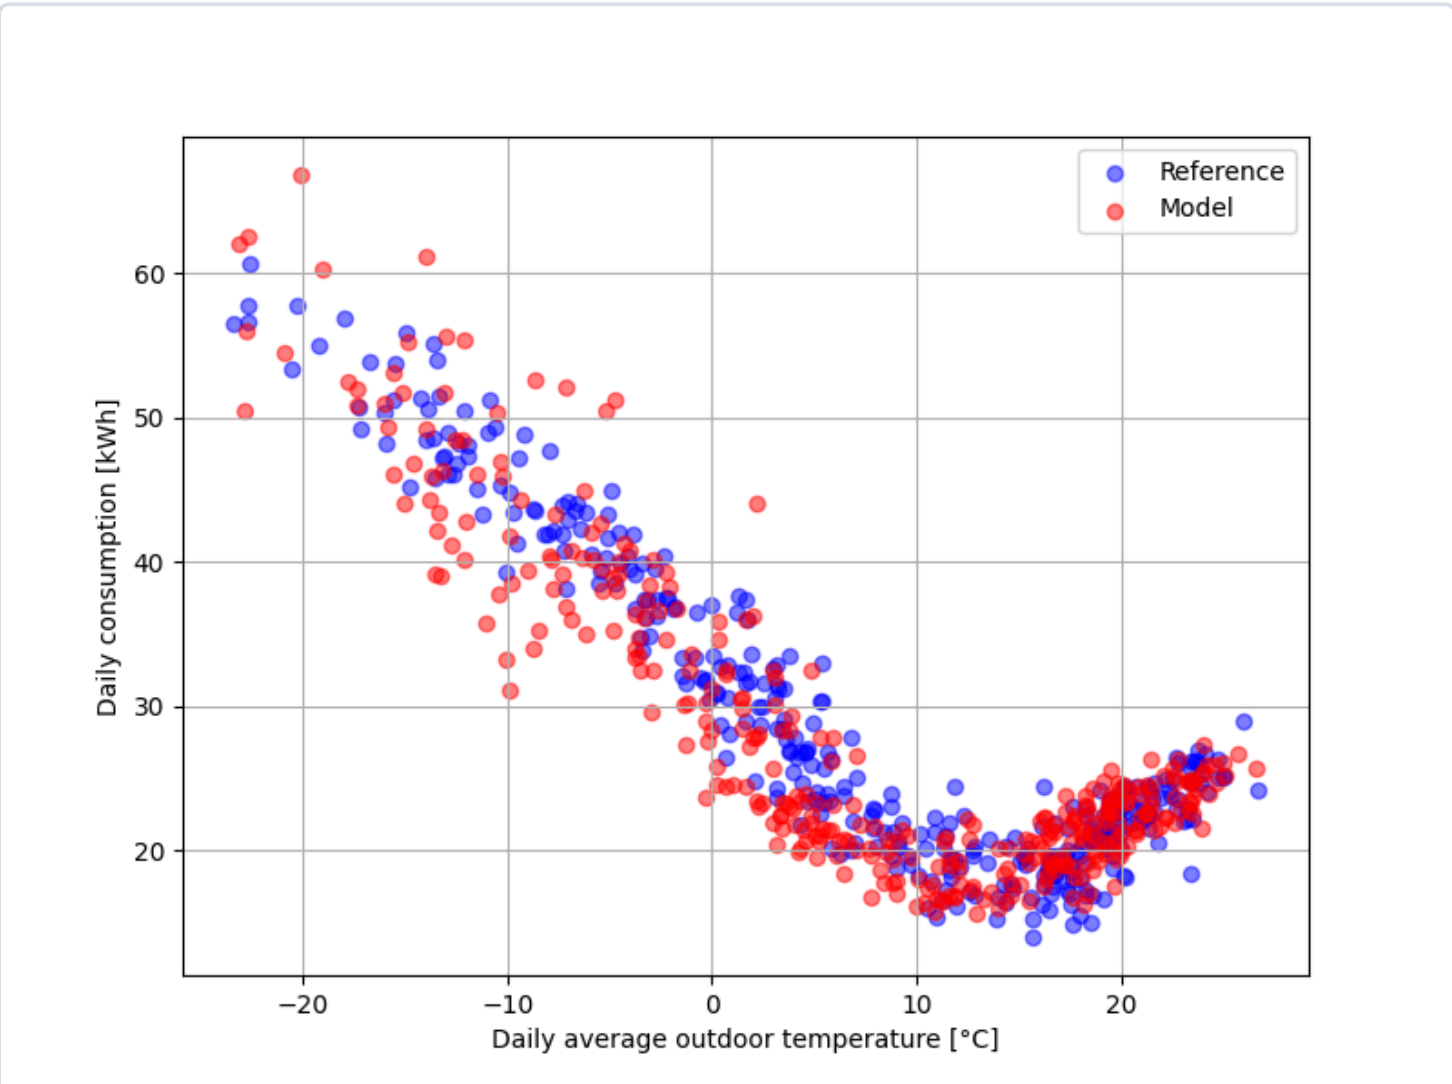

Comparison between modeled daily consumption and reference consumption as a function of outdoor temperature, for all days of the reference year.

COMPARISON TABLE — KEY INDICATORS

INDICATOR	MODEL	REFERENCE	DELTA
Yearly electricity consumption [kWh]	10170	10170	10170
Baseload consumption [kWh/day]	18.6	18.9	-0.2
Electric heating slope [W/K]	-53.9	-51.5	-2.4
Cooling slope [W/K]	29.2	38.3	-9.0
Winter peak demand - AM [kW]	3.6	3.0	0.7
Winter time of peak - AM	9.0	6.0	3.0
Winter peak demand - PM [kW]	3.3	3.4	-0.0
Winter time of peak - PM	17.0	18.0	-1.0