


SECTION 1 — MODEL DESCRIPTION

BUILDING DESCRIPTION

Sector	Residential
Building type	Multi-Unit
Building subtype	Apartment - MR
Vintage	D_Post2011

3D MODEL

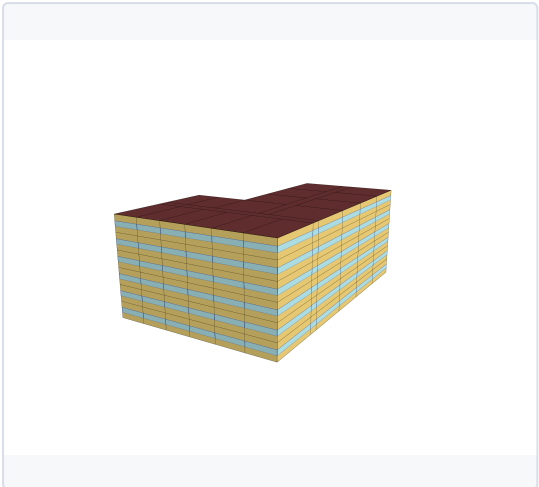

Three-dimensional geometric representation of the building model used for energy simulation and performance analysis.

BUILDING CHARACTERISTICS

Floor Area [m²]	7212
Climate zone	6A

HVAC SYSTEM

Cooling system	Central Electric Heat Pump System
Heating system	Central Heat Pump / Boiler
Ventilation system	Corridor Exhaust + Fresh Air Make-Up
Typical COP cooling	3.50 – 5.00

INSULATION & AIR TIGHTNESS

Exterior walls [W/m²/K]	0.38
Interior walls [W/m²/K]	2.51
Roof [W/m²/K]	0.24
Slabs [W/m²/K]	0.23
Infiltration [m³/h/m²]	4.0

GLAZING

Glazing [W/m²/K]	2.38
SHGC	0.4


WINDOW-TO-WALL RATIO

Average [%]	30.0
-------------	------

ANNUAL END USES — ELECTRICITY [kWh]


END USE	[kWh/year per apart.]
Heating	769
Cooling	1053
Interior Lighting	362
Exterior Lighting	31
Interior Equipment	5486
Fans	461
Total End Uses	8161

MONTHLY CONSUMPTION BY END USE

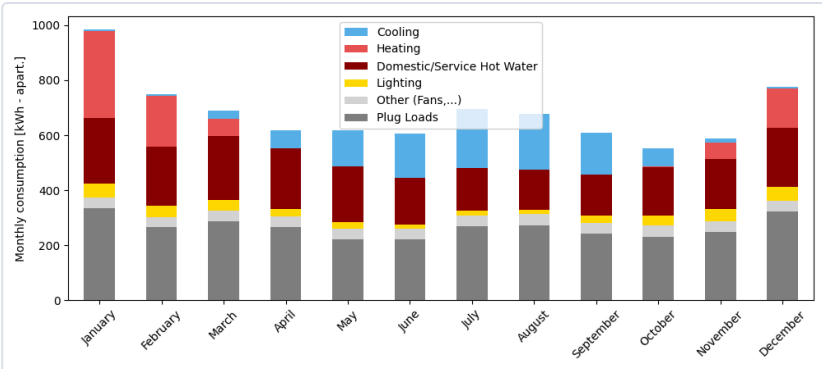

Monthly energy consumption breakdown by end use, showing the contribution of heating, cooling, lighting, domestic hot water, plug loads, and auxiliary systems throughout the year.

AVERAGE DAILY PROFILE BY USAGE

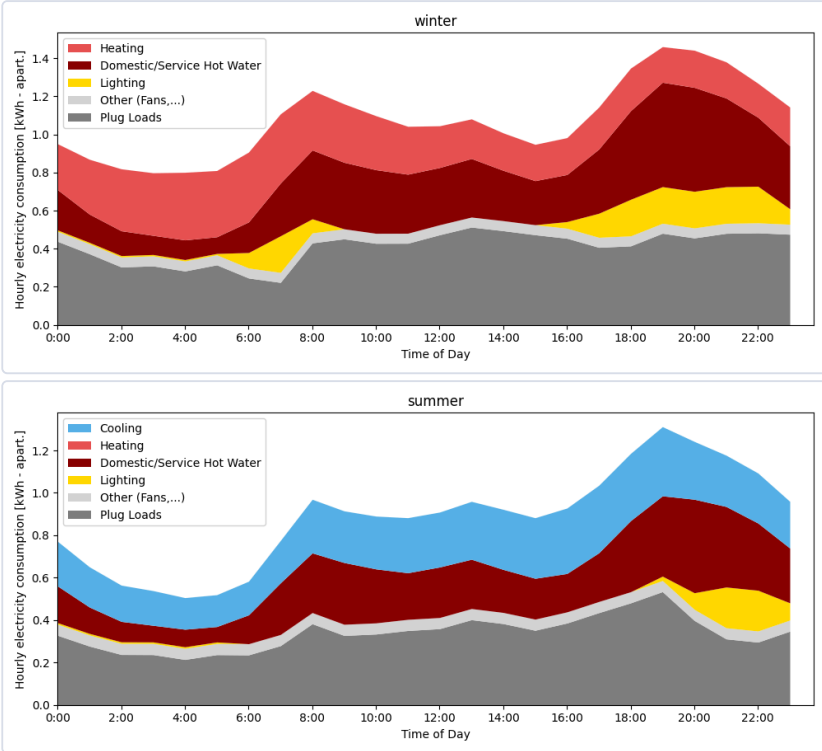

Average daily consumption profile for winter and summer, showing the contribution of cooling, lighting, domestic hot water, plug loads, and auxiliary systems throughout an average winter and summer day.

ENERGY USE INTENSITY

1
kWh/m²/yr

TOTAL CONSUMPTION

8161
kWh/yr

ELECTRICITY

8161
kWh/yr

NATURAL GAS

0
kWh/yr

Données de référence

The reference data used for the comparison come from a dataset of more than 60,000 residential electricity meters, combined with metadata. Filters were applied to ensure consistency with the building type and subtype of this card, as well as to exclude end uses such as pool, spa, and electric vehicle charging.

