




ISSUE	ALTERATIONS
A	ORIGINAL ISSUE
8B	REDRAWN ON CAD R.B 26.2.93
9	WEB ARRANGEMENT REVISED: CN595 B.T. 8.5.93
10	WEB ARRANGEMENT REVISED: CN595 B.T. 26.5.93 SHANGHAI PART - UPDATE ISSUE ON MTMS CO. 74

4 HOLES DRILL & TAP
"X"18 DEEP. MIN FULL THREAD
ON Ø7" P.C.
MAX DRILL DEPTH 21
(DRILL POINT MUST NOT
BREAK THROUGH)

Ø0.25

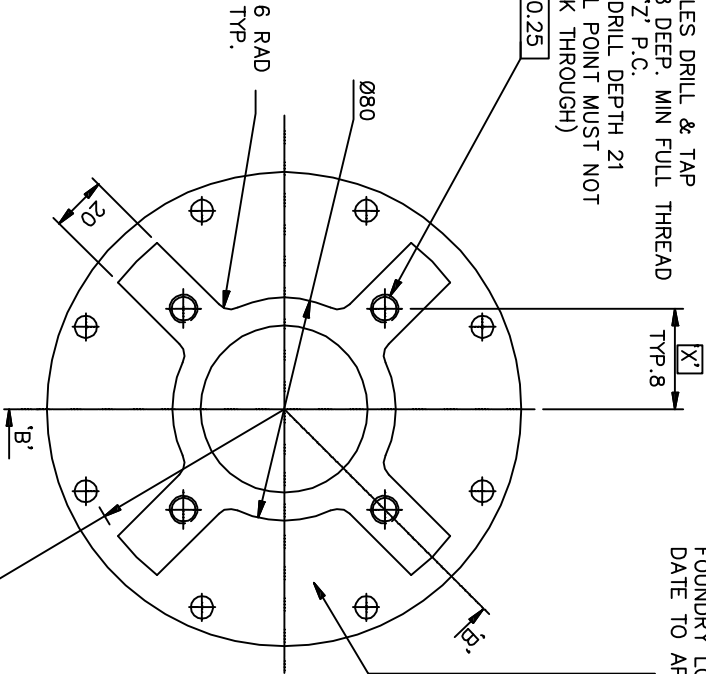

FOUNDRY LOGO AND MELT
DATE TO APPEAR HERE

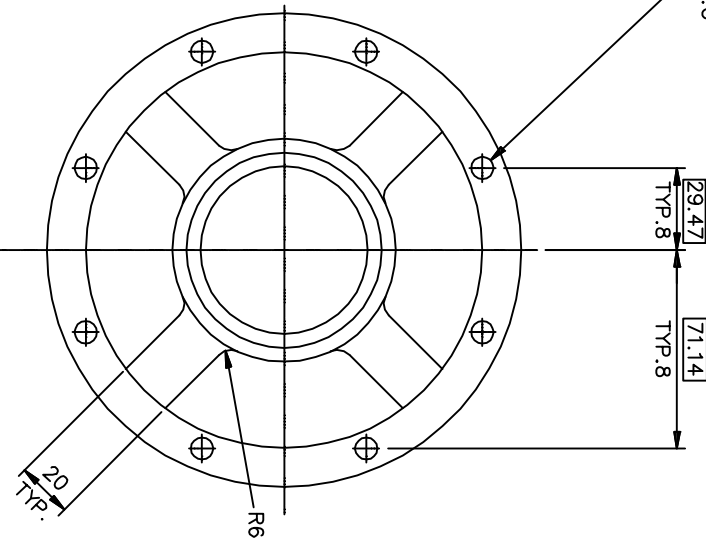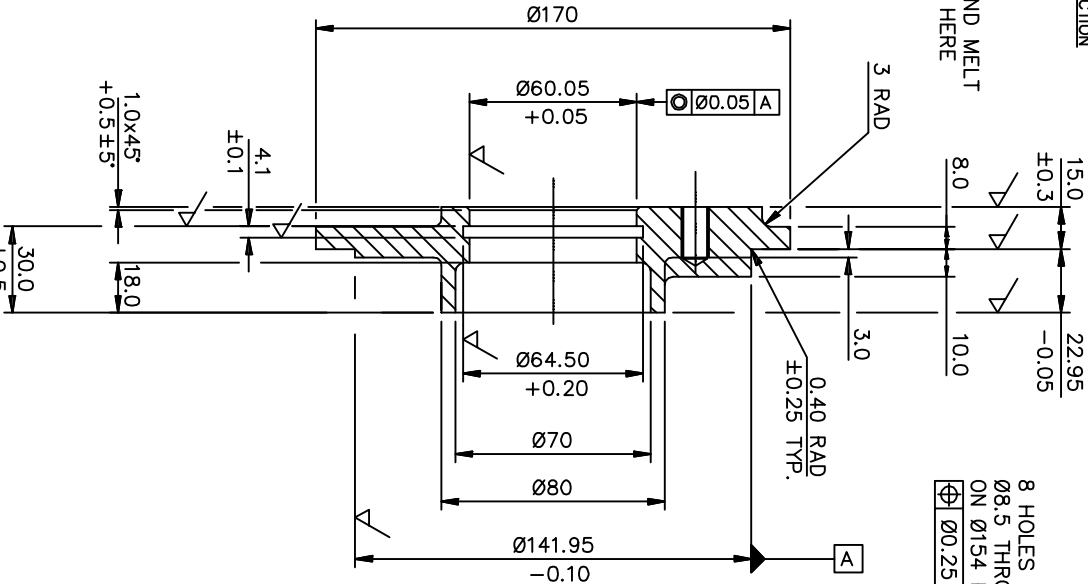

19	44.45	1/2"UNC	125.73	FA12
18	29.34	3/8"UNC	83.00	
17	29.34	M8	83.00	
16	31.82	M10	90.00	
15	33.68	M12	95.25	Ø3.75" P.C.
14	44.90	1/2"UNC	127	Ø5.00" P.C.
13	28.58	3/8"UNC	80.82	Ø3.182" P.C.
12	38.18	M8	108	
11	44.90	M12	127	
10	40.41	7/16"UNC	114.3	Ø4.5" P.C.
9	38.18	M10	108	
8	44.19	M12	125	ISO F12
7	38.18	1/2"UNC	108	
6	40.66	M10	115	
5	38.17	3/8"UNC	107.95	Ø4.25" P.C.
4	29.19	M10	82.55	Ø3.25" P.C.
3	36.06	3/8"UNC	102	ISO FA10
2	36.06	M10	102	ISO F10
1	38.18	M12	108	

USE BLANK
IW3D06

MACHINE "V" WHERE SHOWN "V"

APPROX CAST WEIGHT
= 2.6 Kg

SECTION 'B'-'B'

36					
35					
34					
33					
32					
31					
30					
29					
28					
27					
26					
25					
24					
23	31.82	M10	90.00		
22	39.60	M10	112.00		
21	29.34	M10	83.00		
20	45.61	M12	129.00		
REF	"X"	"Y"	"Z"		REMARKS

UNLESS OTHERWISE STATED:

- (1) ALL DIMENSIONS IN MILLIMETRES
- (2) ALL LINEAR DIMENSIONS TO ±0.1
- (3) ALL ANGULAR DIMENSIONS TO ±1°
- (4) ALL DIMENSIONS FROM SURFACE UNLESS OTHERWISE STATED
- (5) REMOVE ALL SHARP EDGES
- (6) ALL HOLE CENTRES TO BE WITHIN 0.25 OF TRUE POSITION
- (7) SURFACES MARKED "V" TO BE MACHINED AND A MACHINING ALLOWANCE OF 0.1 ON DIAS AND OF 1.5 ON FACES TO BE CAST TO "V" MICRO METRES 3.2
- (8) REMOVED TO "V" MICRO METRES 3.2
- (9) MACHINE ALL OVER TO "V" MICRO METRES 3.2
- (10) ALL GEOMETRIC TOLERANCES ARE T.I.R.

ISO SYMBOLS

- POSITIONAL TOLERANCE
- CONCENTRICITY TOLERANCE
- SURFACES TOLERANCE
- PARALLELISM TOLERANCE
- SYMMETRY TOLERANCE
- REF DIMENSIONS ONLY
- BASIC DIMENSIONS ONLY
- DIMETER

MATERIAL :- C.I TO BS1452 GR. 17
PART NO OF BASIC BASEPLATE, ie LESS
TAPPED HOLES, IS IW3D06

PROJECT :- IW3 QUARTER TURN
WORM GEARBOX

DRAWN:- R.B 26.2.93
CHECKED:- T.W. 10.06.09

SCALE 1:1
HEAT TREATMENT
PROTECTIVE TREATMENT
FOR STORAGE

BASEPLATE

IW3D06