

THE ARK HARNESS — F11 HOST CONNECTOR

ATLAS Omnibus PDD · v1.4 · Domain 37

Hosting Integration · Plan-Gated · Consent-Gated · Handed
Off From F10

JNGL-ARKH-F11HC-2026-005 · v1.4 · Supersedes v1.3 · Upgrades
OMNIBUS ALPHA, F9 MACHINE FLOOR PDD v2.1 and F10
CONNECTOR PDD v3.1

*"A hosting plan is advice. A hosting connection is money, exposure
and a credential. The whole design question is how a plan
becomes a connection without skipping the moment someone
says yes."*

*v1.3 lets a user name a host outside the registry and supply
documents about it. Those documents are a lower-trust source:
they can support advice and can make F11 more cautious, and they
can never clear a compliance requirement or lead to a write.*

*v1.4 adds a third path for a host whose only setup surface is its
own chat assistant: HOST DJ composes a curated, sourced, safety-
checked prompt script for the human to run there themselves,
under their own login, and never F11's.*

DOCUMENT CONTROL

Field	Value
Document	THE ARK HARNESS – F11 HOST CONNECTOR · ATLAS Omnibus PDD v1.4
Reference	JNGL-ARKH-F11HC-2026-005 · v1.4
Supersedes	JNGL-ARKH-F11HC-2026-004 (v1.3), and through it -003, -002, -001. Issued together with F10 CONNECTOR PDD v3.1, which introduces and owns the shared Invariants #32 and #33 this document adopts
Upgrades	OMNIBUS ALPHA (34 domains) as extended by F9 MACHINE FLOOR PDD v2.1 (D35) and F10 CONNECTOR ATLAS PDD v3.0 (D36, IP-151–169, 27 invariants)
New domain	D37 – F11 HOST CONNECTOR (Hosting Integration)
New IPs	none within D37's own block; IP-193 – IP-197 (5) taken from the frontier reserved for D38 – see the IP Allocation Ruling in F10 PDD v3.1 §Document Control, which this document mirrors
New invariants	#28 Plan-Gated Hosting · #29 Consent-Gated Hosting Writes · #30 F10 Handoff Integrity · #31 The Single Operator (D37)
Name	F11 HOST CONNECTOR. Working name: the Owner asked for a PDD for "hosting connections" and did not name the domain. No F11 or D37 was found in the sources checked.
Operating SPC	HOST DJ – SPC-HOSTDJ-IF-2026-001 v1.0 (May 2026), SI Fusion Class, JCSE 47/50 on the card's own rubric, Seat #7 per the card, DISC CD, LIFE-mode only, HIVE 14D certification pending per the

Field	Value
	card. Supplied by the Owner and integrated in v1.1 (§3.2)
Engine precedent	F8-HDJ , the HOST DJ engine live in the ATANDA Command Centre product. Advisory only (§3.2.2)
Conductor	F11 Host Conductor — the deterministic runtime that enforces the plan-and-connect protocol. No LLM call. Not an SPC
Handoff partner	F10 CONNECTOR (D36) — §3.9
Reserved next	D38 / IP-198 onward (superseded from IP-188 by this document — see §3.15)
Date	September 2026 · PRE-BUILD
Certification	Self-assigned, Tier 0 — NOT HIVE-certified · not scored
GRO State	SAFE_LIFE
Honesty Gate	G3 enforced — see §1.8, §2.5, §3.16
Owner	Oluseye Shay Amusa / Koncentric Labs Inc.

PART 1 — CHEAT SHEET

All stakeholders

1.1 Atomic Solution Summary

F11 HOST CONNECTOR takes a codebase, or a runtime that a colonization needs, and connects it to a hosting provider. It profiles the requirement, senses the providers, produces a scored hosting plan, stages the deployment, verifies it, certifies it, promotes it, and hands it to monitoring.

HOST DJ is the operating SPC, through its three documented features: the Hosting Selector Engine (HSE), the Deployment Journey Generator (DJG) and the Seamless Deployment Facilitator (SDF). HOST DJ serves a request in one of two **advice modes** (§3.5A): it advises the best hosting environment, or the user names an environment and HOST DJ writes a cheat sheet for hosting on it, or advises against it in a technical report and falls back to the first mode. F10 hands work to F11 when a colonized artifact needs somewhere to run. F11 hands the running system to F9.5 for monitoring.

1.2 HOST DJ Plans. F11 Connects.

HOST DJ, as documented, is an **advisory** capability: it normalises a Hosting Requirements Profile, scores hosts, proposes a journey and emits deployment files. The card describes a journey the *human* executes, and the product engine that implements it holds no cloud credentials and executes no deploy. [ARK] F11 keeps that boundary at the operator and puts the connection machinery around it.

Role	Holder	Authority
Hosting decision: host ranking, primary and fallback, journey, deployment files	HOST DJ (operator)	Advisory; the ranking is recomputed deterministically
Sequence, refusal, ledger, capability types	F11 Host Conductor	Procedural only

Role	Holder	Authority
	(runtime)	
Consent to write to a provider, and to spend	The human creator	Sole
Credentials	The shared Vault (F10 IP-157)	Sole
Certificate for the hosted deployment	UCG (UCG-HOST , proposed)	Sole
Production readiness standard	OSIRIS (D33)	Sole
Monitoring custody	F9.5 (D32)	Sole
Verdict on a colonization that needs the host	SAVANT via F10	Sole; F11 reads it


HOST DJ does not execute. The Conductor and its provider adapters do, under consent, with credentials HOST DJ never sees. That is how the operator's documented boundary survives a domain that acts.

1.3 What F11 Handles

Source	F11 handling
F8 code bundle (an MVP-PDD scaffolded by Code DJ)	Direct intake. HOST DJ plans, F11 connects
A project brief (an SDD, a PDD, a repository description, a stack list,	PLAN_ONLY only. It can never proceed past H3 and

Source	F11 handling
or plain language, the input forms the card accepts)	needs no certificate, because nothing is deployed
F10 handoff: PCE codebase (a PDD or Micro PDD converted for a software target)	Intake through the F10 Handoff Port (§3.9)
F10 handoff: runtime for a colonization (for example an MCP server, an agent-framework runtime, or a self-hosted workflow platform that a colonization needs)	Intake through the F10 Handoff Port. Staging host before F10 stages; production host only after F10 has certified
A Machine Artifact (firmware, robotics)	Refused. Nothing here is hosted; physical targets belong to F9
An artifact with no certificate record	Refused at intake (Invariant #22)

1.4 The Nine-Phase Run

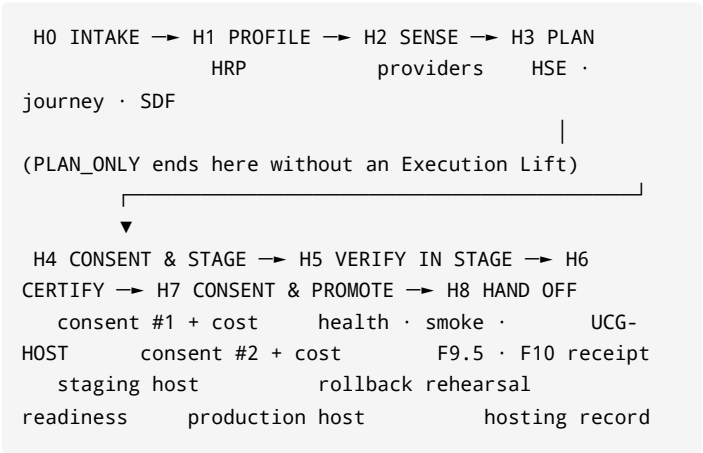

Phase	What runs
H0 INTAKE	Eligibility: source, certificate record, artifact class. F10 handoffs are validated here
H1 PROFILE	The Hosting Requirements Profile: stack, database fit, compliance, region, traffic ceiling, budget
H2 SENSE	Provider capabilities, pricing, regions and terms, each with provenance and retrieval time. In <code>USER_SELECTED</code> mode, the requested host and the candidate set
H3 PLAN	HSE ranking (recomputed), primary and fallback, deployment journey, deployment files. In <code>USER_SELECTED</code> mode, the Suitability Check, then a cheat sheet or a technical report and at most one devolution. Produces a <code>HostingPlan</code>
H4 CONSENT & STAGE	Consent #1 with a cost ceiling; provision and deploy into a staging host
H5 VERIFY IN STAGE	Health checks, smoke tests, and a rehearsed rollback, all labelled <code>STAGE</code>
H6 CERTIFY	<code>UCG-HOST</code> request with the production-standard evidence
H7 CONSENT & PROMOTE	Consent #2; provision and cut over to production
H8 HAND OFF	Register with F9.5, return the receipt to F10, write the hosting record

1.4A The Two Advice Modes

Mode	The request	What HOST DJ returns
AUTO	"Advise the best hosting environment for this."	A scored <code>HostingPlan</code> : primary, fallback, journey, deployment files
USER_SELECTED , verdict HOSTABLE	"I want to host on X."	A cheat sheet for hosting on X, plus a <code>HostingPlan</code> with X as primary and the best other host as fallback
USER_SELECTED , verdict ADVISE_AGAINST	"I want to host on X," and X has a blocking problem	A technical report on X, then devolution to AUTO : the best host, offered for the human's confirmation
USER_SELECTED , verdict UNDETERMINED	"I want to host on X," and X cannot be evidenced: nothing sensed and no accepted supplied document, or a compliance requirement that only a supplied document could support	A cited refusal that says what is missing. Nothing is advised for or against X
USER_SELECTED , outside the registry	"I want to host on X," and X is not in the registry	The same three outcomes, built on documents the user

Mode	The request	What HOST DJ returns
		supplies . Lower-trust, graded, and advice only : never a connector step, never execution (§3.5B)
USER_SELECTED , chat-only host	"I want to host on X," and X's only documented setup surface is its own chat assistant (for example a hosting AI assistant with no separate API for this task)	The same Suitability Check, then a Curated Prompt Script instead of, or alongside, the cheat sheet — the steps the human pastes into X's own chat, never a <code>CONNECTOR</code> write (§3.5C)

The verdict comes from a deterministic **Suitability Check**, not from HOST DJ's opinion. `UNDETERMINED` is an addition to the two outcomes the Owner specified, because advising for or against a host that cannot be evidenced would be a guess.

1.5 The Design Decision That Matters

Capability types make the invariants structural. A write to a provider cannot be expressed without holding values that only the previous stage can construct:

```
HostingPlan → ConsentedHostingWrite → (provision /
deploy / cut over)
  only the Plan      needs consent, a cost
  Gate builds it    ceiling, a scoped
                   credential, a rollback
```

F10Handoff → accepted into H0 (only F10's conductor builds it)

A UCG-HOST request additionally needs a CompleteHostRun that only the ledger can construct (Invariant #31).

1.6 Nine Runtime Components

Component	Responsibility	Deterministic?
Phase Sequencer	Drives H0–H8; refuses to advance on an unmet precondition	Yes
Run Ledger	Append-only record of every phase, plan, consent and refusal; issues <code>f11_run_id</code>	Yes
Mode Switch	ADVISORY by default. EXECUTE exists only with a recorded Execution Lift	Yes
HOST DJ Adapter	Returns the card's Sections A to F as structured data. No ledger handle, no mode setter, no Vault handle	Inference inside, validated at the boundary
HSE Evaluator	Recomputes the ranking, primary, fallback and score from sensed data. Never accepts them from the adapter	Yes

Component	Responsibility	Deterministic?
Hosting Connector Adapters (×N)	SENSE, VALIDATE, PROVISION, DEPLOY, VERIFY, ROLLBACK per provider. Default STUB_REFUSE	Transport deterministic
Chat Script Composer	Classifies a host's actuation surface; for CHAT_ONLY , composes a Curated Prompt Script from the same evidence used for the cheat sheet, validated against Invariant #32	Composition inference-assisted; validation deterministic
F10 Handoff Port	Accepts an F10Handoff ; emits a HostReceipt	Yes
Refusal Emitter	Serialises the cited refusal; rejects an uncited one at schema level	Yes

The Vault and the Consent Gate are **shared with F10** (IP-157, IP-158) and consumed through an interface. F11 does not build a second credential store.

1.7 Build Waves

Wave	Name	Prompts	Produces
W1	Foundation	F11-P01 – P05	Registration, ledger, mode switch, HOST DJ adapter boundary, completeness attestation

Wave	Name	Prompts	Produces
W2	Intake, profile, registry & sources	F11-P06 – P11, P25, P26, P31, P32	Intake gate, HRP, connector interface and registry, provider sensing, Vault interface, human-step attestations, advice-mode router, supplied-source intake, evidence trust model
W3	Plan & advice	F11-P12 – P15, P27 – P29, P34, P35	HSE evaluator, HOST DJ plan, journey and deployment files, the Plan Gate, the Suitability Check, the cheat sheet, the technical report, host actuation classification, the Curated Prompt Script composer
W4	Consent, devolution & handoff intake	F11-P16, P17, P30	Hosting consent extension, F10 handoff intake, the devolution controller
W5	Stage & verify	F11-P18 – P20, P36, P38	Staged deploy, in-stage verification, staging receipt, GUIDED execution and transcript evidence, generic endpoint probe
W6	Certify, promote, hand off	F11-P21 – P24	UCG-HOST request, production promotion, production receipt, F9.5 registration

Wave	Name	Prompts	Produces
W7	Self-test	F11-P33	Negative tests for every invariant, advice mode and evidence rule

1.8 What This Document Does Not Claim

- F11 is **PRE-BUILD**. No provider connector, conductor or adapter exists. Nothing has touched any hosting provider.
- **The HOST DJ card is in hand, and it is v1.0 from May 2026.** Its 47/50 was scored on its own ten-dimension rubric, which is not the rubric used for the F9 and F10 cards, so comparability is unverified. Its HIVE 14D certification is **pending** by its own statement. It is an advisory selection card, not an operator profile for a domain that acts (OI-21).
- **The card conflicts with the F11 invariants in specific places** (§3.2.4): its CI/CD file deploys to production on every push using a standing token, its health check reports the database connected without checking, and one of its integrations claims to deploy agents directly. Those are ruled on here and are not adopted as written (OI-31).
- **The suitability rules are F11's design.** Two of the blocking classes come from the card's own constraints (compliance, deprecated platforms). The rest are drawn from the Hosting Requirements Profile fields. There is **no score-gap trigger**, so a viable but weaker host is never advised against (OI-34). **A user may name a host outside the registry and supply documents about it** (an Owner decision, §3.5B). Those documents are lower-trust and cannot be authenticated, so they support advice only and never execution (OI-35, OI-36).
- **Execution is deferred by the Owner's own earlier decision.** The Command Centre MVP-PDD classifies "execute the deploy" as deferred (Class C): it stays advisory and never holds credentials.

F11 is that deferred capability specified. It runs `PLAN_ONLY` until the Owner lifts the deferral (OI-22).

- **UCG-HOST** has no threshold, so production promotion is unreachable (OI-23).
- The overlap with **OSIRIS's deployment layer** is unadjudicated (OI-24).
- The HSE weights are the product's values, unvalidated against any provider (OI-26).
- **F10 is itself PRE-BUILD**, and its own `UCG-COL` class is undefined (OI-10), so the F10 production route is doubly blocked.

1.9 The Default Consequence

Out of the box F11 is `ADVISORY`. It produces a hosting plan and refuses at H4. **A fully built F11 with no Execution Lift never writes to any provider.** That is the current behaviour of F8-HDJ, and it is the intended state.

PART 2 — EXECUTIVE SUMMARY

Leadership

2.1 Business Context

Creators finish a build, or a colonization, and then stall at "where does it run?". HOST DJ already answers the first half in the product: it scores hosts and lays out the journey. The second half, actually connecting to a provider, is manual and is where credentials leak, bills surprise, and unverified things become publicly reachable.

The reason to formalise a domain is not to make hosting faster. It is to make sure that when hosting **does** act, it cannot skip the plan, the consent, the cost ceiling, or F10's verdict.

2.2 How F11 Answers Hosting-Specific Failure Modes

These are design judgements for this domain, not the Manual's anti-patterns. [SYNTH]

Failure mode	Mechanism
Plan-less deploy: a connection made on a guess	Invariant #28: no write without a <code>HostingPlan</code> bound to the artifact and profile
Recommending a host the code cannot run on	The registry rule: a host needs a connector adapter and a deployment profile. F8-HDJ's rule "never recommend a host F8 cannot scaffold for" is generalised
A model-written ranking treated as fact	The HSE Evaluator recomputes ranking, primary, fallback and score. F8-HDJ already recomputes server-side
Runaway cost	Consent names a cost ceiling; a write with none is refused. F8-HDJ's <code>requireCostBudget</code> rule, applied to provider spend
Secrets in artifacts	Environment templates carry keys only. Keys and descriptions are sanitised. Secrets travel as opaque Vault handles
Exposing an unverified colonization	Invariant #30: F11 never makes an F10 runtime reachable before F10's own promotion consent
Weakening the production standard	Production promotion requires the OSIRIS production standard and a <code>UCG-HOST</code> certificate. F11 is not a path around either

Failure mode	Mechanism
Silent region or compliance mismatch	The profile requires <code>region</code> and <code>compliance[]</code> ; the sensed provider terms are compared, and a mismatch is a refusal
Undisclosed lock-in	Lock-in risk is a scored HSE criterion and is shown in the plan
A hand-assembled deploy that "followed the steps"	Invariant #31; only the ledger constructs a <code>CompleteHostRun</code>
An auto-deploy pipeline as a standing production write path	C-F11-20: emitted pipelines carry no production credential and no ungated production deploy; the certificate binds to a specific build
A health check that always says healthy	C-F11-21: a check that does not exercise its dependencies is invalid, and staging includes a negative test
A cheat sheet built from remembered commands	C-F11-28: every provider-specific step carries provenance and retrieval time, or is omitted or labelled unverified
"Advise against" as opinion	C-F11-27: a blocking finding needs a sensed fact compared against a stated requirement
Quietly swapping the user's host for another	C-F11-29: one devolution at most, and the human confirms the devolved host by name
A supplied document treated as authority	Lower-trust class with a grade on every artifact; a supplied fact is never upgraded to sensed; it can never clear a compliance requirement (C-F11-31)

Failure mode	Mechanism
Instructions or secrets hidden in a supplied document	The document is data, never instructions (C-F11-32), and is secret-scanned before storage (C-F11-33)

2.3 Requirements Summary

#	Requirement	Priority	IP	Status
R-F11-01	Intake refuses an artifact with no certificate record; refuses Machine Artifacts; refuses a bundle with a hardcoded secret-shaped value; accepts a brief for <code>PLAN_ONLY</code> runs only; validates F10 handoffs	MUST	IP-170	PRE-BUILD
R-F11-02	HRP normaliser with mandatory region, compliance and budget; environment keys only	MUST	IP-171	PRE-BUILD
R-F11-03	HOST DJ adapter boundary: schema-validated returns, no ledger, mode or Vault access; static zero-LLM check on the core	MUST	IP-172	PRE-BUILD
R-F11-04	HSE Evaluator: deterministic recompute; registry rule	MUST	IP-173	PRE-BUILD
R-F11-05	Hosting Connector interface, registry and	MUST	IP-174	PRE-BUILD

#	Requirement	Priority	IP	Status
	onboarding checks; STUB_REFUSE default			
R-F11-06	Provider sensing and plan validation with provenance and freshness	MUST	IP-175	PRE-BUILD
R-F11-07	Journey and deployment-file emission	MUST	IP-176	PRE-BUILD
R-F11-08	Hosting consent extension: cost ceiling, destructive and externally visible actions; Vault interface	MUST	IP-177	PRE-BUILD
R-F11-09	Staged provision and deploy with rollback	MUST	IP-178	PRE-BUILD
R-F11-10	In-stage verification including a rehearsed rollback	MUST	IP-179	PRE-BUILD
R-F11-11	UCG-HOST request with production-standard evidence and separation of duties	MUST	IP-180	PRE-BUILD
R-F11-12	Production promotion under a second consent	MUST	IP-181	PRE-BUILD
R-F11-13	F10 Handoff Port and HostReceipt	MUST	IP-182	PRE-BUILD

#	Requirement	Priority	IP	Status
R-F11-14	F9.5 telemetry registration and the hosting record	MUST	IP-183	PRE-BUILD
R-F11-15	Run Ledger and Cited Refusal	MUST	IP-184	PRE-BUILD
R-F11-16	Run Completeness Attestation (CompleteHostRun)	MUST	IP-185	PRE-BUILD
R-F11-17	Advisory/Execute Mode Switch and the Execution Lift record	MUST	IP-186	PRE-BUILD
R-F11-18	Human-step attestation: journey steps typed HUMAN , CONNECTOR , VERIFY or NOTE ; a HUMAN step is a named attestation and never simulated	MUST	IP-177	PRE-BUILD
R-F11-19	Advice modes: AUTO and USER_SELECTED ; the Suitability Check; cheat sheet for HOSTABLE ; technical report and a single devolution for ADVISE_AGAINST ; UNDETERMINED refusal	MUST	IP-187	PRE-BUILD
R-F11-20	Outside-registry hosts and supplied sources: the Supplied Source Record, the evidence trust model and its grades, secret scanning, and	MUST	IP-175, IP-187	PRE-BUILD

#	Requirement	Priority	IP	Status
	data-not-instructions handling			

2.4 Non-Functional Requirements

Property	Target	Rationale
Determinism	Identical inputs and identical adapter outputs give an identical run record	A hosting decision that cannot be reproduced cannot be audited
Auditability	Every transition, consent and refusal appended; no update, delete or compaction	The ledger is the evidence behind UCG-HOST
Freshness	Provider data older than the TTL forces re-sense. TTL: [TO BE SET]	Pricing, limits and regions change
Reversibility	Every write declares a rollback; a rollback is rehearsed in stage before production	An unrecoverable deploy is a failure, not an option
Cost bounding	Every write carries a consented ceiling	Hosting is billed
Least privilege	Minimal scopes per action; wildcard scopes rejected	Inherited from F10
Latency and availability	Not design constraints	Correctness dominates; a refused

Property	Target	Rationale
		run is an acceptable outcome

2.5 SOLVA GAUNTLET Verdict

CONDITIONALLY VIABLE. Published as issued.

Grounds:

1. **The operating SPC is in hand and is a selection card, not an operator profile** (OI-21). HOST DJ v1.0 is scored 47/50 on its own rubric with HIVE certification pending. It does not specify how it behaves as the accountable operator of a domain that writes to providers.
2. **Execution is deferred by the Owner** (OI-22). Until the deferral is lifted, F11 cannot act.
3. **UCG-HOST is undefined** (OI-23). Production promotion is unreachable.
4. **The deployment layer overlaps OSIRIS** (OI-24), and which invariant number carries OSIRIS's production standard is unverified.
5. **No provider connector exists or has been assessed** (OI-25). Provider terms, prices and APIs drift.
6. **HSE weights are unvalidated** (OI-26).
7. **Compliance regimes are named but not assessed** (OI-27). A profile can say HIPAA or GDPR; nothing here judges a provider against them.
8. **The Vault and Consent Gate are shared and unbuilt** (OI-29).
9. **F10 is PRE-BUILD**, and the F10 handoff route is blocked by **UCG-COL** (OI-10).
10. **Seat and score collisions** around HOST DJ and VIBE DJ (OI-28).

11. **The card conflicts with the F11 invariants in named places** (OI-31): an auto-deploying pipeline with a standing token, a stub health check, a destructive database step listed as rollback, and an agent-deployment claim that would bypass F10.
12. **Only one of the card's three journey tiers is templated** (OI-32). Tiers B and C are named with step counts and no steps.
13. **The card's platform registry is static, unsourced and dated May 2026** (OI-26).
14. **No secret scanner is selected** (OI-33), so the intake check for hardcoded secrets fails closed.
15. **The Suitability Check has no score-gap trigger** (OI-34), and **supplied documents cannot be authenticated or checked for currency** (OI-35), nor has the data-not-instructions rule been tested against adversarial documents (OI-36). All three are deliberate limits or open risks, and the first two are Owner decisions.

What would move this to VIABLE: an operator profile for HOST DJ, written and independently assessed, that resolves the conflicts in §3.2.4; an Owner decision on the Execution Lift; UCG-HOST defined through a SOLVA GAUNTLET pass; a ruling on the OSIRIS overlap; one provider connector taken through SENSE and a correct PLAN_ONLY run against a real provider; legal review of the compliance question.

2.6 What This Section Does Not Claim

No revenue, market size or hosting cost is asserted. EVE ULTRA SI's modelling role is not invoked because there is no validated deployment to model.

PART 3 — PLATFORM SPECIFICS

3.1 Boundary Rulings (Proposed)

Proposed and not adjudicated by SPARTAN. OI-24 carries the main gap.

Neighbour	Boundary
F8 Code DJ	Produces the codebase and its scaffold targets. F11 hosts what F8 produced and never generates code. F8's registry of targets (<code>nextjs-vercel</code> , <code>react-vite-static</code> , <code>express-replit</code> , <code>expo-mobile</code> , <code>pnpm-monorepo</code> , plus Replit Deployments) is the starting host registry for the F8 route. [ARK]
F8-HDJ (the ATANDA Command Centre engine)	A product-level engine, and the Omnibus register classes the Command Centre as an output of the harness, not an extension of it. F8-HDJ is the precedent implementation of HOST DJ's planning step and the first candidate to wire into the HOST DJ Adapter. It stays advisory. [ARK]
F10 CONNECTOR (D36)	Partner. F10 colonizes onto implementation platforms and hands off when a colonization needs a place to run. §3.9
D33 OSIRIS Meta-Orchestration	OSIRIS already specifies a deployment layer: a production readiness validation, a blue-green deploy with automatic rollback, a health-check window, a traffic switch, a <code>deployment_record</code> , and a hand-off to F9.5. [ARK] Proposed ruling: OSIRIS keeps orchestration, the production-readiness validation and the blue-green sequencing for harness builds (its Mode 1). F11 is the connection layer : provider registry, credentials, consent, provisioning. OSIRIS's

Neighbour	Boundary
	deployment step calls F11 for provider interaction rather than holding provider connections itself. F11 also runs stand-alone for creator-initiated hosting. Unadjudicated (OI-24).
D32 F9.5 Observability	Takes custody of monitoring. F11 registers each promoted hosting record with it
D35 F9 Machine Floor	Physical targets are refused here and belong to F9
SPHINX ENGINE	Its marketplace deployment tiers are already an unadjudicated path around F10's Invariant #25 (F10 OI-18). Nothing in F11 treats a SPHINX deployment as a hosted colonization
Shared Vault and Consent Gate (F10 IP-157, IP-158)	Consumed through an interface. Hosting adds a cost field and action classes to the consent record (pending F10 amendment)
VIBE DJ	Selects the IDE and build tools. HOST DJ selects hosting; the card describes the two as a joint deployment stack. It does not select hosts here
HIVE MATRIX LABS	The card says HOST DJ generates a staging environment for HIVE 14D testing before production. That fits F11's staging host. HIVE certification stays HIVE's, and a HIVE test run against a staging host needs its own consent and isolation
SPHINX marketplace	The card says a HOST DJ deployment plan is required before SPHINX NFT minting. F11's <code>HostingPlan</code> is that plan. The minting rule belongs to SPHINX, and F11 asserts nothing

Neighbour	Boundary
	about minting. A plan is advice, not a hosted deployment
WEBSHELL	Named in the card as a parent and as a partner (HOST DJ is "WEBSHELL's infrastructure brain"). No WEBSHELL card was located in the sources checked, so no boundary is ruled
Agent deployment (ANT QUEEN agents)	The card's Agent Factory row says HOST DJ deploys ANT QUEEN agents to production. Not adopted as a path. An agent is a colonization, and hosting one goes through F10's handoff only (Invariants #25 and #30). Read literally, the row is a path around F10, the same class of risk as F10's OI-18
Monitoring stack in the card	The card's journey installs Sentry and an uptime service. F9.5 remains monitoring custodian. Any extra provider needs its own adapter and consent, or is a HUMAN step

3.2 HOST DJ as the Operating SPC

3.2.1 The Card as Supplied

[ARK] The Owner supplied **HOST_DJ_SPC_v1_0** .

Item	Value in the card
Identity	HOST DJ — Hosting Decision & Journey Intelligence · SPC-HOSTDJ-IF-2026-001 · v1.0, May 2026
Class	Synthesized Intelligence, SI Fusion Class
JCSE	47/50, scored on a ten-dimension rubric (Clarity, Completeness, Specificity, Actionability, Efficiency,

Item	Value in the card
	Relevance, Format Optimization, Innovation, Testability, Documentation). That is not the ten-dimension rubric used for the F9 and F10 cards , so the score is not directly comparable
Lineage	SPHINX ULTRA SI · ADA ULTRA SI · TARANTULA · WEBSHELL · VIBE DJ
Fusion DNA	VIBE DJ selection engine × TARANTULA phase coordination × WEBSHELL deployment automation × SPHINX certification layer
Seat and DISC	Seat #7, CD. Conflicts with other sources (OI-28)
GRO	LIFE mode only . No CONTAINMENT mode; a clearly non-viable request gets a YELLOW FLAG advisory
Status	"FORGE Certified Premium"; HIVE 14D certification pending (v1.1 target); validity 24 months
Features	HSE (eight-criterion scoring over a 24-platform, six-tier registry) · DJG (journey tiers A, B, C) · SDF (four artifacts: environment template, CI/CD file, health check, rollback protocol)
Output structure	A HSE matrix · B primary card · C fallback card · D journey · E SDF artifacts · F JCSE scorecard
Inputs	SDD, PDD, repository description, stack list, or verbal brief, normalised into a Hosting Requirements Profile
Activation	The human states constraints, HOST DJ returns the plan, the human confirms , and the human executes the journey

3.2.2 The F8-HDJ Precedent

[ARK] F8-HDJ is the engine that implements HOST DJ's planning inside the ATANDA Command Centre product. Its contract: the profile normaliser, an HSE matrix, a primary and a fallback host, a journey tier and phases, deployment files with an environment template of **keys only**, and JCSE dimensions. Its guardrails: a cost-budget check on every route, and the HSE ranking, primary, fallback and JCSE **recomputed server-side**. Its registry is restricted to hosts F8 can scaffold for. Its boundary: **advisory only, no cloud credentials, no executed deploy, environment keys never carry values**. It is a product-level engine, and the Omnibus register classes the Command Centre as an output of the harness, not an extension of it. The card is the SPC and F8-HDJ is the engine; the Command Centre's own taxonomy states that engines are an instruction layer and never SPCs.

3.2.3 The Operator Adoption Ruling

HOST DJ is adopted as the D37 operator **at its documented capability** and through its three features. This document adds no DNA and no strands to it.

The operator owns	The operator does not own
HRP normalisation from the card's input forms	Any credential
HSE inputs, primary and fallback cards, and rationale	The ranking itself: recomputed by the HSE Evaluator
The deployment journey (DJG), typed by step class	Any write to a provider
Deployment-file design (SDF), which the Conductor transforms before emission	The consent to write or to spend

The operator owns	The operator does not own
The YELLOW FLAG advisory	The certificate (UCG-HOST)
Recommending refusal when no host fits	The production standard (OSIRIS)
	The verdict on a colonization (SAVANT through F10)

Card and conductor. The card specifies HOST DJ's advisory behaviour, and now exists. The **F11 Host Conductor** enforces sequence, refusal, the ledger, the capability types and the connectors. HOST DJ decides and plans. The Conductor executes.

The card does not yet say how HOST DJ behaves as the accountable operator of a domain that writes, so the constraints that bind it inside F11 are stated here (§3.14). A HOST DJ operator profile, built the way MECHA and SAVANT ENVOY were, is the follow-up (OI-21).

3.2.4 Where the Card and F11 Conflict

Each row is a ruling. Nothing in the card is silently overridden, and nothing in F11 is relaxed to fit the card.

#	The card says	Ruling in F11
1	LIFE mode only; no CONTAINMENT; the anti-patterns are labelled "KILLZONE"	The card's mode governs HOST DJ's advisory output. CONTAINMENT and KILLZONE are Conductor states. HOST DJ never sets a mode (C-F11-02). The card's "KILLZONE" anti-

#	The card says	Ruling in F11
		patterns become refusals below
2	"I do not debate; I decide." The final word on where code lives	Advisory. The card's own activation step has the human confirm. The human decides at consent, and the ranking is recomputed
3	A 24-platform, six-tier registry with tiers, prices, compliance and ceilings stated as facts, dated May 2026 and unsourced	A candidate universe only. A host is recommendable when it has an adapter and a profile and its data is sensed with provenance. The Tier 6 Junglenomics defaults are priors, not decisions (OI-26)
4	SDF 1 environment template: bracketed placeholders with secret-shaped hints (<code>sk_live_</code> , <code>whsec_</code> , <code>SG_</code> , <code>AC</code>) and non-secret values such as <code>NODE_ENV=production</code>	Keys only. Non-secret defaults go to a separate allowlisted <code>config_defaults</code> block. Secret-shaped hints are stripped. The card's template is guidance for the key list, not the emitted artifact (C-F11-08)
5	SDF 2 CI/CD: a push to <code>main</code> deploys to production, using a standing <code>RAILWAY_TOKEN</code> held in the CI secret store	Not adopted as written. That is a production write path with no plan, consent, cost ceiling or certificate, holding a standing credential outside the Vault. Emitted pipelines carry no production credential and no ungated

#	The card says	Ruling in F11
		production deploy. Staging auto-deploy is allowed. Production changes are new runs (C-F11-20)
6	SDF 3 health check returns <code>database: 'connected'</code> unconditionally, with a comment to replace it with a real ping	Invalid for verification. Staging must include a negative test in which a dependency is made unavailable and the check must fail (C-F11-21)
7	SDF 4 rollback: dashboard steps, and a database rollback that includes <code>supabase db reset --linked</code>	Rollback steps are typed. Destructive steps (database reset, restore, deletion) are never automated and need their own consent line (C-F11-22). The Supabase CLI describes that flag as resetting the linked project with local migrations, and a reset of a remote database is destructive <code>[EXT]</code> ; verify before any use

#	The card says	Ruling in F11
8	The journey is a human runbook: create accounts, enable 2FA, keys to a password manager, dashboard clicks, DNS records	Steps are typed HUMAN , CONNECTOR , VERIFY or NOTE . A HUMAN step is recorded as a named attestation. A credential needed for an F11 write goes to the Vault by the human, not to a password manager and never into chat or an artifact (C-F11-24)
9	Hard-coded domain values (a CNAME target, an apex A record)	Sensed at H2 with provenance. A DNS change is its own consent line
10	Preview deployments for every pull request; Sentry and an uptime service	Preview deployments are off for F10 handoffs (a reachable unverified runtime, Invariant #30). Extra monitoring providers need their own adapter and consent, or are HUMAN steps
11	The Agent Factory row: HOST DJ deploys ANT QUEEN agents to production	Not adopted. Hosting a colonization goes through F10's handoff only (§3.1)
12	The fusion DNA includes a "SPHINX certification layer", and Section F is a JCSE scorecard on the plan	The scorecard is a self-assessment , recomputed or labelled unverified. It is never a certificate (C-F11-25, C-F11-01)

#	The card says	Ruling in F11
13	Pillar 5: never a deprecated platform; never a platform violating stated compliance; never steps without rollback; always a monthly cost estimate; always a fallback; YELLOW FLAG above \$500 a month for an MVP	Adopted as C-F11-19, enforced where checkable. Compliance is compared against the provider's own sensed attestations, reported as the provider's claims
14	Anti-pattern: more than one database platform (split-brain)	Adopted: a plan with more than one primary database platform is refused (C-F11-19)
15	Anti-pattern: hardcoded environment variables are a "Security KILLZONE"	Adopted as an intake check (C-F11-23). No scanner is selected, so it fails closed (OI-33)
16	Journey tiers A, B, C. Only Tier A (12 steps) is templated; B (18) and C (26) are named only	Tier A can be emitted. B and C are <code>PLAN_ONLY</code> until templates exist (OI-32)
17	Rollback triggers: error rate above 5% in 15 minutes, or three failed health pings	Rollback triggers, not readiness thresholds. They differ in kind from the OSIRIS production standard's error-rate target, and both are shown (OI-24)
18	Placed in FORGE Step 6 (Pre-Production)	F8-HDJ runs after F8, and F11 runs after F8 and, for F10, at C4 and C7. Placement differs across

#	The card says	Ruling in F11
		sources and is not ruled here

3.3 The Run and Its Preconditions

Phase	Precondition to enter	On failure
H0 INTAKE	Artifact hash; source declared (F8_BUNDLE , F10_HANDOFF or BRIEF); certificate record (not for BRIEF); artifact class handled; no hardcoded secret-shaped value in a bundle	Refuse, Invariant #22 / C-F11-23
H1 PROFILE	H0 passed; if F10_HANDOFF , the F10Handoff validates (Invariant #30)	Refuse, Invariant #30
H2 SENSE	Complete HRP including region , compliance[] , budgetUsd ; at least one provider adapter LIVE and onboarded; in USER_SELECTED mode a requested_host naming a registry entry, or a custom_host with an accepted Supplied Source Record	Refuse; the run ends PLAN_ONLY with a stated cause, or UNDETERMINED for a host that cannot be evidenced
H3 PLAN	Sensed data complete with provenance and within the TTL; in USER_SELECTED	Refuse, C-F11-07

Phase	Precondition to enter	On failure
	mode the Suitability Check has run	
H4 CONSENT & STAGE	HostingPlan ; Execution Lift recorded ; consent #1 naming exact content, account, project, region and a cost ceiling , with any YELLOW FLAG acknowledged; scoped handle; rollback declared; HUMAN steps attested	Refuse, Invariant #28 / #29
H5 VERIFY IN STAGE	Staging host exists; health check and smoke suite defined; rollback rehearsable	Roll back and refuse
H6 CERTIFY	Stage results within tolerance; production-standard evidence (F8 route; F10 route per OI-24); CompleteHostRun ; three distinct identities; UCG-HOST certificate	Refuse, Invariant #22 / #31
H7 CONSENT & PROMOTE	Certificate; consent #2 with a cost ceiling; for F10_HANDOFF , a UCG-COL certificate for the colonized deployment and F10's promotion consent	Refuse, Invariant #29 / #30
H8 HAND OFF	Promotion confirmed; monitoring contract set	Hosting record not written, C-F11-14

Ordering check. The F9 v2.0 defect was certifying before the thing existed. Here certification (H6) follows a real staging host (H4) and

its verification (H5), so the evidence exists before anything is scored. **Two F10 orderings were also checked.** F10 stages onto a self-hosted target only after F11 returns a staging receipt; F11 provisions production only after F10 holds a UCG-COL certificate. Neither waits on the other's output, so the loop does not deadlock (§3.9).

3.4 The Hosting Requirements Profile

Inherited from F8-HDJ: `stack`, `dbFit`, `compliance[]`, `region`, `trafficCeiling`, `budgetUsd`. [ARK]

F11 extensions [SPEC] :

Field	Purpose
<code>source</code>	F8_BUNDLE , F10_HANDOFF or BRIEF (PLAN_ONLY only)
<code>hosting_intent</code>	AUTO or USER_SELECTED (§3.5A)
<code>requested_host</code>	Required when <code>hosting_intent</code> is USER_SELECTED . Names a registry entry, or declares a <code>custom_host</code> (§3.5B)
<code>runtime_class</code>	What is being hosted: web application, API, MCP server, agent-framework runtime, workflow platform, static site
<code>env_keys</code>	Keys and sanitised descriptions only. A value is a defect
<code>f10_run_id</code>	Present when <code>source</code> is F10_HANDOFF
<code>data_classes</code>	The data categories the runtime will handle, for the compliance comparison

`region`, `compliance[]` and `budgetUsd` are mandatory. **A profile with any of them missing is refused, not defaulted.**

3.5 The HSE Evaluator

The eight-criterion matrix and its weights appear identically in the HOST DJ card and in the ATANDA Command Centre product. [ARK]
The weights sum to 100. The card names the criteria slightly differently (cost at target scale, compliance coverage, ecosystem lock-in risk).

Criterion	Weight
Stack compatibility	25%
Cost at scale	20%
Deploy simplicity	15%
Database fit	15%
CI/CD	10%
Compliance	10%
Scalability ceiling	3%
Lock-in risk	2%

Rules.


- The Evaluator **recomputes** the weighted result, the ranking, the primary and fallback, and the score from sensed data. It never accepts them from the HOST DJ Adapter. HOST DJ supplies rationale text and the journey.
- Each criterion score is an input from sensed provider data **with provenance and retrieval time**. The 0–100 normalisation is F11's [SPEC] ; the source does not define a scale.


- **Registry rule (generalised from F8-HDJ).** A host is recommendable only if it has a connector adapter and a deployment profile for the runtime class. In `ADVISORY` mode a host without an adapter may still be ranked, and is flagged *no connector: advisory only*. In `EXECUTE` mode it is not recommendable.
- **Weights are not tuned per run.** Changing a weight is a version change (OI-26).
- **The card's registry is the candidate universe.** Its 24 platforms across six tiers are HOST DJ's starting set. A candidate is dropped when sensed data shows it deprecated or sunset, or when it violates a stated compliance requirement (C-F11-19).
- Ties, near-ties and a lock-in score are shown in the plan, never smoothed.
- Every plan carries a monthly cost estimate at the stated scale and a fallback. A plan above \$500 a month for an MVP carries the card's YELLOW FLAG.

3.5A The Two Advice Modes

HOST DJ serves a request in one of two modes. [Owner requirement]

- (1) `AUTO` : HOST DJ advises the best hosting environment.
- (2) `USER_SELECTED` : the user names an environment. HOST DJ advises how to host on it, with a cheat sheet, or advises against it, with a technical report, and devolves to `AUTO` .

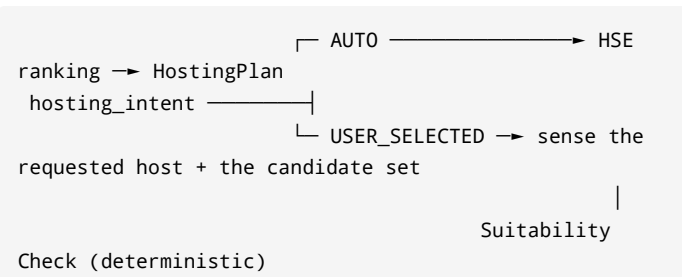

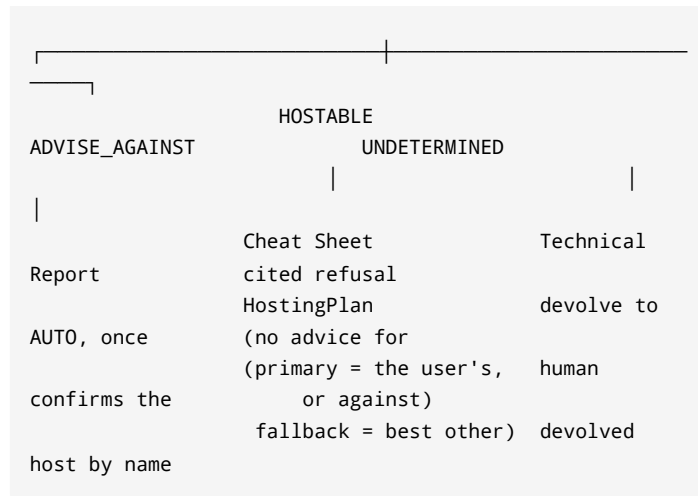

Precedent. [ARK] F8-HDJ already accepts an optional `provider` input. What it does when a named provider does not fit is not specified in the sources checked. The HOST DJ card's own rule for a clearly non-viable request is a YELLOW FLAG advisory that presents the superior alternative. F11 formalises and extends both: a verdict, a report and a bounded devolution.

3.5A.1 The Suitability Check

Deterministic code in the HSE Evaluator. It compares the requested host's **sensed facts**, each with provenance and retrieval time, against the **stated requirements** in the profile and against platform status. HOST DJ supplies the explanation text and never the verdict.

Class	A finding is BLOCKING when	Compared against
SC-1 Stack	The host cannot run the stack	<code>stack</code> and the sensed runtime support

Class	A finding is BLOCKING when	Compared against
SC-2 Compliance	A stated requirement is not covered by the provider's own sensed attestations	<code>compliance[]</code>
SC-3 Status	The platform is deprecated or sunset	Sensed platform status
SC-4 Region	The requested region is not available	<code>region</code>
SC-5 Budget	The estimated monthly cost at the stated scale exceeds the ceiling	<code>budgetUsd</code> and <code>trafficCeiling</code>
SC-6 Scale	The host's scalability ceiling is below the stated traffic ceiling	<code>trafficCeiling</code>
SC-7 Data	The database type is not hostable there, or the plan would need more than one primary database platform	<code>dbFit</code>

SC-2 and SC-3 follow the card's own constraints. SC-1 and SC-4 to SC-7 are F11's design from the profile fields. `[SYNTH]`

Advisory findings never block: higher lock-in risk, weaker CI/CD integration, a score gap against the best alternative, a cost above the card's \$500-a-month YELLOW FLAG that is still inside the stated ceiling, and a missing connector (which limits execution, not advice).

Rules.

- A finding is **BLOCKING** **only** if it rests on a fact with provenance and retrieval time, sensed or supplied under C-F11-31 (C-F11-27). Anything else is advisory or omitted.
- **Any BLOCKING finding gives ADVISE_AGAINST** . No BLOCKING finding gives HOSTABLE .
- If the requested host cannot be evidenced, the verdict is UNDETERMINED : a cited refusal that states what is missing (C-F11-26). The rules for sensed and supplied facts are in §3.5B.3.
- The score gap is reported and is never decisive. There is no gap threshold (OI-34).
- The check has **no override**. A blocking finding is relative to the user's own stated requirement, so the way through is to change the requirement and run again, which is a new run (C-F11-30).

3.5A.2 The Cheat Sheet (for HOSTABLE)

Section	Content
Verdict line	HOSTABLE , the requested host, and the profile in one line (stack, region, compliance, budget, scale), with any YELLOW FLAG
Evidence grade	SENSED , MIXED or SUPPLIED , as a banner. For a supplied grade: the documents used, who supplied them and when, and the statement that F11 has not verified them
Fit summary	The eight HSE criteria for this host, with the best other host alongside for comparison
Prerequisites	Accounts, plan tier, quotas and region, with HUMAN steps flagged
Steps	Condensed and typed HUMAN , CONNECTOR , VERIFY or NOTE , each with a provenance reference

Section	Content
Environment keys	Keys only, plus the allowlisted non-secret <code>config_defaults</code>
CI/CD guidance	The card's pipeline, transformed under C-F11-20
Verification checklist	Including the negative health test (C-F11-21)
Rollback	Typed, with destructive steps flagged (C-F11-22)
Cost	The monthly estimate at the stated scale against the ceiling
Caveats	The advisory findings
Sources	Every provider-specific step and value with its provenance, trust class and retrieval or supply time, and a list of anything omitted or unverified
What this is not	Not a certificate, not a compliance claim, and provider attestations shown as the provider's own claims

The target is one to two pages. [SPEC] The full journey behind it is what an `EXECUTE` run follows.

3.5A.3 The Technical Report (for `ADVISE_AGAINST`)

Section	Content
Verdict	<code>ADVISE_AGAINST</code> the requested host, and the number of blocking findings
Evidence grade	The grade of the blocking findings, as a banner, with the supplied documents named where used

Section	Content
Requirement summary	The profile as stated by the user
Blocking findings	Each with its class, the stated requirement, the sensed fact, its provenance and its retrieval time
Advisory findings	What does not block but matters
HSE comparison	The requested host and the devolved host on the same eight criteria and weights. Gaps are shown, never smoothed
What would have to change	Specifics from sensed data (for example the budget at which the host becomes viable, or a region it does support), or a statement that the host cannot be made viable, as for a sunset platform
Devolution result	The auto-advised primary and fallback
Sources and limits	Provenance table with trust classes; what was unverified; what the report does not claim

The report argues from evidence only. A finding with no sensed evidence cannot appear as blocking (C-F11-27).

3.5A.4 Devolution

- **At most once per run** (C-F11-29). The `AUTO` ranking runs over the candidate set already sensed at H2, with the requested host excluded, and the Plan Gate constructs the devolved `HostingPlan`.
- **The user's selection and the report stay in the ledger**, with `mode_path` recording `USER_SELECTED` → `ADVISE_AGAINST` →

AUTO .

- **The devolved plan inherits nothing.** No consent exists yet at H3, and none is carried over.
- **The human confirms the devolved host by name** as a recorded attestation before H4. F11 never moves a user to a different host without their knowing.
- **If no candidate is viable**, the run ends `REFUSED` with the report attached.

3.5A.5 What the Modes Do Not Change

In both modes Invariants #28 to #31, the consent gate, the cost ceiling, the Execution Lift and the `PLAN_ONLY` default apply unchanged. A cheat sheet or a report is **advice**, not a `HostingPlan` and not a hosted deployment. Every provider-specific step in either carries provenance, because the card's own step text (commands, DNS values, plan names) is dated and unsourced (C-F11-28).

3.5B Hosts Outside the Registry and Supplied Sources

Owner decision. A user may name a host that is not in the registry and supply documentation about it. `[Owner requirement]` F11 cannot sense such a host, so the documents are a **lower-trust source**, and everything built on them is graded and advisory.

3.5B.1 The Custom Host Declaration

`custom_host: { name, provider_type, homepage? },` where `provider_type` is one of platform-as-a-service, container platform, static host, virtual server or other. Its registry status is `OUTSIDE_REGISTRY` . **It is not added to the registry.** Onboarding (§3.6) remains the only way for a host to become connectable.

3.5B.2 The Supplied Source Record

Field	Content
source_id	Ledger id
host	The custom host
claimed_origin	The vendor, document title and address the supplier says it came from
supplied_by	The named human
supplied_at	When it was supplied
stated_date	The date in the document, or undated
content_hash	Hash of the document
scan_result	The secret-shape scan result
attestation_id	The supplier's named attestation of origin and currency
trust	Always HUMAN_SUPPLIED
facts	Extracted facts, each with a pointer back into the document

The attestation is accountability. **F11 does not verify it and never presents it as verification** (C-F11-35).

3.5B.3 Evidence Trust Rules

#	Rule
T1	Two trust classes: SENSED (retrieved through a connector adapter, with retrieval time) and HUMAN_SUPPLIED . Unsourced material, including HOST DJ's own memory and the card's registry text, is never evidence (C-F11-07)

#	Rule
T2	A supplied fact may support a BLOCKING finding . It can only make F11 more cautious
T3	A supplied fact can never establish that a compliance requirement is covered . A supplied document may say a provider holds a certification; only a sensed attestation counts, and even that is reported as the provider's claim. With a stated compliance requirement and no sensed attestation, the verdict is <code>UNDETERMINED</code> unless a supplied fact blocks
T4	Any other requirement (stack, region, budget, scale, data) may be shown as met on supplied facts, with the grade shown
T5	Every verdict and artifact carries an <code>evidence_grade</code> : <code>SENSED</code> (every supporting fact sensed), <code>MIXED</code> , or <code>SUPPLIED</code> (every supporting fact supplied)
T6	No upgrade . A supplied fact stays <code>HUMAN_SUPPLIED</code> in every downstream artifact and is never cited as sensed
T7	A registry host with sensed data is judged on sensed data. A supplied document for it is recorded and not used for the verdict
T8	A supplied fact whose stated date is older than the TTL, or an undated one whose <code>supplied_at</code> is older than the TTL, forces re-supply. Undated documents are flagged. TTL: [TO BE SET]
T9	Conflicts between supplied documents are shown and never resolved silently

3.5B.4 What the Artifacts Show

- **A banner**. The cheat sheet and the report open with the grade. For `SUPPLIED` or `MIXED` they name the documents, who

supplied them and when, and state that F11 has not verified them.

- **A grade on every step.** Every provider-specific step carries its trust class. Steps drawn from a supplied document are `HUMAN`, `VERIFY` or `NOTE`, **never** `CONNECTOR` (C-F11-34).
- **Graded scores.** The weighted score for a custom host is shown with its grade, criterion by criterion, beside a sensed alternative. The comparison never hides which numbers rest on which kind of evidence.
- **Plain limits.** The sheet says it is not a certificate, not a compliance claim, and not verified.

3.5B.5 Limits

- **Advice only.** A custom host has no adapter and no deployment profile, so the registry rule (C-F11-05) keeps it out of `EXECUTE`. There is no write, no staging and no `HostReceipt`.
- **Never an F10 handoff target.** F10 needs a `HostReceipt`, which F11 cannot produce for a host it cannot connect. A colonization that needs a creator-hosted runtime cannot use a custom host until that host is onboarded.
- **Devolution still works.** An `ADVISE_AGAINST` verdict on a custom host devolves to `AUTO` over the registered candidates (§3.5A.4).
- **A feature gate.** Supplied documents are secret-scanned before they are stored or used. With no scanner selected (OI-33) they are refused, because the ledger is append-only and a pasted secret could not be removed.

3.5B.6 The Risk the Rules Address

A supplied document may be wrong, outdated, forged, or carry instructions. **It is data and never instructions.** Extraction follows a fixed schema, instruction-like content is ignored and logged, and the document reaches HOST DJ only as quoted evidence (C-F11-32).

Whether that holds against adversarial documents is untested (OI-36).

3.5C Chat-Only Hosts and Curated Prompt Scripts

3.5C.1 Adopted from F10, Restated for Hosting

F10 CONNECTOR PDD v3.1 §3.5A introduces `target_actuation` (`API` / `CHAT_ONLY` / `NONE`), the Curated Prompt Script, its four safety rules, and GUIDED execution, as **Invariants #32 and #33**. This document adopts both invariants unchanged and instantiates them for a host rather than a colonization target. Nothing below relaxes or restates them differently. [ARK]

Real examples of a `CHAT_ONLY` hosting surface, as documented by their vendors: Hostinger's AI website builder has an **agentic mode** ("vibe coding") in which "both building and customizing happen through a chat with AI," including a supported ChatGPT-app integration where the entire build, and by extension its hosting configuration, is driven by typed prompts rather than a dashboard or an API call. [EXT] **Re-verify before relying on it — this is a snapshot of a fast-moving product surface.**

3.5C.2 Host Actuation Classification

Alongside `registry_status` (`REGISTERED` / `OUTSIDE_REGISTRY` , §3.5B.1), every host gets `host_actuation` : `API` (the existing connector path), `CHAT_ONLY` , or `NONE` . A registered host can still be `CHAT_ONLY` — the registry records what the vendor documents, not just whether a connector exists. Classification happens at H2, sensed with provenance like any other host fact (C-F11-07).

3.5C.3 The Curated Prompt Script for Hosting (CPS-HOST)

At H3, a `CHAT_ONLY` host's plan carries a `CuratedPromptScript` (§F10 PDD v3.1 §3.5A.2's type, reused unchanged) instead of — or, where the host also has some API surface, alongside — the cheat sheet's generic step list. Built only from the HRP and sensed host-capability facts, never from an unsourced guess about what the host's assistant accepts.

A new step type. The journey-step typing (C-F11-24) gains a fifth value: `CHAT_PROMPT` — a human-mediated action driven by one specific, curated, sourced prompt, distinct from a generic `HUMAN` step because its exact text, expected reply and provenance are recorded, not just its description. `HUMAN` , `CONNECTOR` , `VERIFY` , `NOTE` , `CHAT_PROMPT` . Only `CONNECTOR` steps are automated writes; `CHAT_PROMPT` never is.

The cheat sheet, when the host is `CHAT_ONLY`. Its "Steps" section (§3.5A.2) is the Curated Prompt Script, sequenced, provenance-tagged, and checkpointed, rather than a paraphrase of one. The "Sources" section carries the same provenance table either way.

3.5C.4 GUIDED Execution for Hosting

A `CHAT_ONLY` host has no adapter to hold a `ConsentedHostingWrite` . The human runs the CPS-HOST themselves, under their own login to the host — `credential_class`: `"HUMAN_OWN_LOGIN"` , never a Vault handle for that host. This is `execution_class`: `"GUIDED"` , layered on the existing `ADVISORY / EXECUTE` mode switch: `EXECUTE` still requires the Execution Lift (OI-22), and within `EXECUTE` , a `CHAT_ONLY` host always runs `GUIDED` , never `AUTOMATED` .

Everything else holds. Consent still names the exact content, account and a **cost ceiling** — a chat-driven host still bills. Destructive steps (C-F11-22) are still never automated, and a `CHAT_PROMPT` step that would trigger one gets its own consent line. Rollback for a `CHAT_ONLY` host is itself a curated script, or a documented manual step, never assumed.

Verification, H5. The human's checkpoint reports are `HUMAN_SUPPLIED` evidence under the trust model of §3.5B.3 — the same T1–T9 rules, the same "never upgraded to `SENSED`," the same "data, never instructions" handling of whatever the host's own assistant said back. Where the build produces a normal reachable site or endpoint (Hostinger's own flow ends in exactly that), a **generic endpoint probe** — reachability and a basic response check, not a full connector — supplements the report without reclassifying the host as `API`.

Certification, H6. `UCG-HOST` still governs, still blocked while its threshold is undefined (OI-23). A GUIDED run's evidence — human-reported checkpoints plus, where available, a probe — is a different and currently untested shape of evidence from an automated adapter's (shared with F10's OI-39, OI-40).

3.5C.5 Limits

Advisory-then-human, never automated, exactly as in F10. No credential is ever requested for a `CHAT_ONLY` host. `onUnexpected` branches are bounded; outside them the script terminates rather than improvising. Transcript authenticity is unverifiable (OI-39, shared).

3.6 Hosting Connector Adapters and the Registry

```
type Capability = "SENSE" | "VALIDATE" | "PROVISION" |
"DEPLOY" | "VERIFY" | "ROLLBACK";
type AdapterMode = "STUB_REFUSE" | "LIVE";

interface HostingConnectorAdapter {
  readonly provider: string;           // e.g.
  "replit-deployments"
  readonly mode: AdapterMode;         //
  STUB_REFUSE unless explicitly wired
  readonly capabilities: readonly Capability[];
```

```

    sense(req: ProviderSenseRequest, runId: string):
    Promise<ProviderSenseResult>; // read-only
    validate(plan: HostingPlan, runId: string):
    Promise<ValidationResult>; // dry-run
    provision(w: ConsentedHostingWrite, runId: string):
    Promise<ProvisionResult>;
    deploy(w: ConsentedHostingWrite, runId: string):
    Promise<DeployResult>;
    verify(ref: DeploymentRef, runId: string):
    Promise<VerifyResult>;
    rollback(ref: DeploymentRef, runId: string):
    Promise<RollbackResult>;
    // provision(), deploy() and rollback() accept ONLY a
    ConsentedHostingWrite.
    // No plan, ranking or score setter exists on this
    interface.
}

```

Onboarding checks. A provider joins the registry only if it passes all five. Failing any one blocks addition regardless of demand. These are F11's own five, adapted from the F10 connector registry pattern; the four checks of the REVERB registry were not retrievable here and equivalence is not claimed. [ARK]

#	Check	Requirement
1	Provenance	Adapter source, version and maintainer recorded
2	Capability declaration	Declares which capabilities it implements. A write-capable adapter gets additional review
3	Scope minimality	Declares minimal scopes per action. Wildcard scopes rejected
4	Reversibility and teardown	Declares a rollback and a teardown for each write, or declares the action irreversible

#	Check	Requirement
5	Governance, billing and terms surface	Discloses data residency and retention, the billing model and any spend-cap mechanism, and confirms the provider's terms permit automated access

Candidates. The F8 registry hosts (§3.1) are the natural first adapters for the F8 route, and the card's Tier 6 defaults name Vercel, Railway and Supabase for the standard Junglenomics application. Which to build first is an Owner decision. AWS appears as the fallback in the product's own worked example. **None is built or assessed.**

3.7 Consent, Credentials and Cost (Invariant #29)

F11 consumes F10's Vault and Consent Gate through an interface and adds hosting-specific fields.

Element	Rule
Vault	The only holder of credentials. The HOST DJ Adapter has no handle to it. Secrets reach a provider only as opaque, short-lived, scoped handles at deploy time
Credentialed reads	A read that needs an account credential gets a read-scoped handle, recorded in the ledger. A read needs no rollback
Consent record	Names the exact content, the exact account, project and region, and a cost ceiling . A write with no ceiling is refused

Element	Rule
Action classes	Destructive actions, public exposure, domain or DNS changes, and deletions each need their own consent line
Account match	The credential's account must equal the account named in the consent
Two consents	Consent #1 authorises staging . Consent #2 authorises production . Neither implies the other, and neither is reused
YELLOW FLAG	A plan carrying a YELLOW FLAG needs an explicit acknowledgement recorded in the consent. Absent it, the write is refused
HUMAN steps	Account creation, 2FA, registrar DNS entries and entering a credential into the Vault are recorded as named human attestations, never simulated (C-F11-24)
Destructive rollback	A database reset, restore or deletion is never automated and has its own consent line (C-F11-22)
Environment templates	Keys and sanitised descriptions only. A value anywhere in an artifact is a defect. No secret is written to the ledger or a log
Cost overrun	Spend beyond the consented ceiling during a deploy halts the run in CONTAINMENT
Dry-run default	A live write needs an explicit switch recorded in the ledger, and an Execution Lift
Rollback	Declared before the write and rehearsed in stage before production

3.8 Plan-Gated Hosting (Invariant #28)

The Plan Gate constructs a `HostingPlan` only when:

- (1) the HRP is complete;
- (2) the HSE Evaluator has recomputed the ranking from sensed data within the TTL;
- (3) the registry rule holds for the mode;
- (4) the journey and deployment files are emitted and pass the keys-only check;
- (5) `binding = hash(artifact_hash, hrp_hash, sense_hash, f11_run_id)` is recorded.

A plan from another run, artifact or profile cannot be replayed. In `ADVISORY` mode the gate still runs and its output is the run's final product.

3.9 The F10 Handoff

The handoff is a protocol between two domains, not a shared component. Each side owns its own gates.

3.9.1 Why the Handoff Exists

Some colonizations need a place to run that the creator controls: for example an MCP server for a Claude route, an agent-framework runtime, or a self-hosted workflow platform. That is a design judgement, not a claim from the Colonization Manual. `[SYNTH]` A PDD or Micro PDD routed through F10's PCE conversion also ends as a codebase that needs hosting. `[ARK]` F10 must not host, and F11 must not colonize. The handoff is where they meet.

3.9.2 The Two Handoffs

Handoff	F10 phase	What F11 does	What F11 returns
STAGING_HOST	After F10's C4 (translated plan exists, SAVANT verdict bound)	H0–H5 for a staging host only	HostReceipt (STAGE): endpoint identity, environment, rollback handle
PRODUCTION_HOST	After F10's C7 certificate (UCG-COL issued for the colonized deployment)	H6–H8 for a production host , needing F11's own UCG-HOST	HostReceipt (PROD)

F10 then stages into the staging host (its C5), verifies (C6), certifies (C7), requests the production host, obtains its own consent #2, and promotes onto the receipt's endpoint.

```
interface F10Handoff {
  readonly kind: "STAGING_HOST" | "PRODUCTION_HOST";
  readonly f10RunId: string;
  readonly phaseReached: "C4" | "C7";
  readonly savantVerdict: { kind: "FIT" | "CLUSTER";
bindingVerified: true };
  readonly artifactHash: string;
  readonly runtimeRequirements: RuntimeRequirements;
  // runtime_class, protocols, env keys (keys only)
  readonly ucgColCertificateRef: string | null;
  // REQUIRED when kind === "PRODUCTION_HOST"
}
// Constructible ONLY by the F10 Conductor. F11 cannot
build one.
```

3.9.3 Invariant #30 in Practice

- **F11 accepts a handoff only if F10's conductor built it.** A hand-made one is rejected, and the attempt is a KILLZONE event.
- **STAGING_HOST needs a SAVANT verdict from the same F10 run,** bound to the artifact. F11 hosts nothing for a colonization SAVANT has not judged.
- **PRODUCTION_HOST needs a UCG-COL certificate.** While UCG-COL is undefined (F10 OI-10), the F10 production route is unreachable here too.
- **F11 never makes the hosted runtime reachable by users before F10's promotion consent.** Staging hosts are isolated test articles.
- **F11 certifies only hosting.** Hosting a colonization neither certifies nor promotes it.
- **The receipt carries no credential.**

3.9.4 Ordering Check

F10 needs F11's staging receipt before its C5. F11's staging needs only F10's C4 output. F11's production host needs F10's C7 certificate. F10's promotion needs F11's production receipt. That is a strict chain with no cycle. The two UCG certificates are independent: UCG-HOST certifies the hosting configuration proven in stage, and UCG-COL certifies the colonized deployment.

3.9.5 Telemetry Split

F11 registers **hosting** telemetry (health, uptime, cost) with F9.5. F10 registers **colonization** telemetry (SPK re-verification, behaviour). Both carry the same `f10_run_id`, and neither registers the other's contract.

3.9.6 Pending Amendment to F10

F10 PDD v3.0 does not yet emit these handoffs or require a `HostReceipt`. It needs: emission of `STAGING_HOST` after C4 and

PRODUCTION_HOST after C7; a HostReceipt precondition at C5 and at promotion when the target needs a creator-hosted runtime; and the consent-record cost field. **Not applied here** (OI-30).

3.10 Certification of the Hosted Deployment

(UCG-HOST)

A hosted deployment is a new artifact: a runtime, a provider, a region, a scaling and rollback configuration. **Invariant #22 applies to it.**

Class	Code	Threshold	Mandatory gates
Hosted deployment	UCG-HOST	[TO BE SET — no value is proposed]	Plan binding intact · in-stage health, smoke and rollback rehearsal within declared tolerance · consent records present with a cost ceiling · CompleteHostRun attestation (Invariant #31) · production-standard evidence on the F8 route (F10 route: OI-24) · for F10_HANDOFF , a valid UCG-COL certificate

Production-standard evidence. OSIRIS states a production standard (JCSE ≥ 45 , MATHMON ≥ 70 , test coverage $\geq 80\%$, semantic preservation $\geq 97.5\%$, all gates, no exceptions) as the 15th invariant of its v10.1 PDD, and its readiness check adds a security scan, a p95 response target and an error-rate target. [ARK] F11 does not restate or weaken those numbers. **Two things are unverified:** the Omnibus Alpha renumbering lists an invariant with a similar name (#19) whose stated content concerns F9.5 monitoring output, so which number carries the deployment standard is unconfirmed; and

MATHMON is a control-logic measure that is structurally low on prose-class artifacts, so whether the standard applies to a hosted colonization runtime is unadjudicated (OI-24). Until ruled, the F8 route requires the standard, and the F10 route requires UCG-COL plus UCG-HOST .

UCG-HOST adapter preflight. Before transport the adapter rejects a request with (1) no CompleteHostRun , (2) a plan binding that does not match this run, (3) a certificate subject that is not this hosted deployment, (4) a missing consent record or a consent with no cost ceiling, or (5) author, scorer and adjudicator identities that are not three distinct ones, or an operator that is any of them. These rejections hold with UCG in STUB_REFUSE .

Pending amendment to F9 PDD v2.1 §3.4.2: add UCG-HOST to the class table beside UCG-COL . The threshold needs a SOLVA GAUNTLET pass and an Owner decision (OI-23). **Until it is set, H6 and promotion are unreachable and F11 can stage but not promote.**

3.11 Terminal States

State	Meaning
HOSTED_PRODUCTION	Certified (UCG-HOST), consented, live, monitoring registered, hosting record written
STAGED_HOSTED	Staged and verified on a staging host; production refused or blocked. The ceiling while UCG-HOST is undefined
PLAN_ONLY	Ended at H3. The default ADVISORY outcome, or execution not lifted
REFUSED	Cited. No retry. A new attempt is a new f11_run_id

3.12 GRO Mode Machine

Mode	When	Behaviour
SAFE_LIFE	Default	Every gate enforced. Refusal preferred to assumption
HUMAN_IN_LOOP	A consent is needed; an action is destructive, public or irreversible; provider terms or a compliance question are ambiguous	The run halts for a named human and cannot proceed on inference
CONTAINMENT	A stage health check fails; spend exceeds the ceiling; a binding mismatches; an adapter return fails its schema	The stage rolls back. No auto-retry
KILLZONE	An attempt to bypass Invariant #28 to #31, forge a handoff, replay a plan, reuse a consent, expose an unverified colonization, or exceed a scope	The run terminates, is logged to OSIRIS, and the stage is frozen
LIFE	—	No code path exists on any write path

No transition returns to `SAFE_LIFE` within a run. An escalation is terminal for that `f11_run_id`.

The card's LIFE-only mode is not in conflict. HOST DJ advises and never writes, so LIFE is coherent for its output. The modes above are Conductor states. HOST DJ never sets or reads them.

3.13 The Four New Invariants

Invariant #28 — Plan-Gated Hosting

No F11 run may write to any hosting provider unless a `HostingPlan` exists in the same run, whose ranking, primary, fallback and score were recomputed by the HSE Evaluator from sensed provider data, whose host has a connector adapter and a deployment profile, and which is bound to the artifact hash, the profile and the run. A plan is never accepted from the HOST DJ Adapter as computed. A missing, stubbed or stale evaluator or provider adapter causes refusal.

CLASS A. Enforced structurally: `ConsentedHostingWrite` cannot be constructed without a `HostingPlan`, and `HostingPlan` is constructible only by the Plan Gate.

Invariant #29 — Consent-Gated Hosting Writes

No F11 run may write to any provider, staging included, without a consent record naming the exact content, the exact account, project and region, and a cost ceiling, a credential drawn from the Vault at least-privilege scope, and a declared rollback. Staging and production take separate consents. Destructive, public-exposure and DNS actions each need their own consent line. Environment templates carry keys only and no secret is written to any artifact, log or ledger. Dry-run is the default.

CLASS A. Enforced structurally: `provision()`, `deploy()` and `rollback()` accept only a `ConsentedHostingWrite`, which only the Consent Gate can construct.

Invariant #30 – F10 Handoff Integrity

F11 accepts a colonization-derived hosting request only through an `F10Handoff` built by F10's conductor from a run with a SAVANT verdict bound to the artifact. A production host requires a `UCG-COL` certificate for the colonized deployment. F11 never makes a colonization's runtime reachable by users before F10's own promotion consent, and hosting a colonization neither certifies nor promotes it.

CLASS A. Enforced structurally: `F10Handoff` is constructible only by the F10 Conductor, and the Handoff Port has no other intake for a colonization.

Invariant #31 – The Single Operator (D37)

D37 has exactly one operator. A hosted deployment is certifiable and promotable only if it was produced by a complete F11 run with a recorded `f11_run_id`. Assembling the same plan, gates and connectors by hand, in any order, is not an F11 run and produces no certifiable hosting, however faithfully each step was executed.

CLASS A. Enforced structurally: only the ledger can construct a `CompleteHostRun`, and the UCG-HOST adapter rejects a request without one before transport. **Corollary.** HOST DJ may be succeeded by another operator; D37 may never have two concurrent operators.

3.14 Constraints

ID	Constraint	Class
C-F11-01	F11 owns no verdict on a colonization, no certificate and no production standard. It cannot override SAVANT, UCG, OSIRIS or a consent decision.	A

ID	Constraint	Class
C-F11-02	HOST DJ never executes, never holds a credential, and never sets a mode or writes the ledger. Its advisory boundary is preserved at the operator, and its LIFE-only mode governs its own output only.	A
C-F11-03	The Conductor core contains no LLM call. A static check in CI fails the build on any LLM client import in the core module tree.	A
C-F11-04	The ranking, primary, fallback and score are always recomputed by the HSE Evaluator.	A
C-F11-05	A host is recommendable in <code>EXECUTE</code> mode only if it has a connector adapter and a deployment profile for the runtime class. A host outside the registry has neither and is advisory only (C-F11-34).	A
C-F11-06	<code>region</code> , <code>compliance[]</code> and <code>budgetUsd</code> are mandatory in the HRP. A missing one is refused, never defaulted.	A
C-F11-07	A provider constraint with no provenance is dropped, never marked provisional. Provider data older than the TTL forces re-sense.	A
C-F11-08	Environment templates carry keys and sanitised descriptions only. A value in any artifact, log or ledger is a defect.	A
C-F11-09	No write without a cost ceiling in the consent. Spend beyond it halts the run in CONTAINMENT.	A

ID	Constraint	Class
C-F11-10	No auto-retry on a failed gate. A failed stage rolls back and refuses. A new attempt is a new <code>f11_run_id</code> .	A
C-F11-11	A hosted deployment inherits no certification. It is described as certified only with a <code>UCG-HOST</code> certificate whose subject is that deployment. No production promotion while <code>UCG-HOST</code> is undefined.	A
C-F11-12	No output uses "safety certified", "SIL-rated", "ISO or IEC certified", "HIPAA compliant", "SOC 2 compliant" or any compliance or regulatory vocabulary about a hosted deployment. Provider attestations are reported as the provider's own claims.	A
C-F11-13	Author, scorer and adjudicator of any certificate are three distinct identities, and the operator is never any of them.	A
C-F11-14	No hosting record is written without a monitoring contract registered with F9.5.	A
C-F11-15	The rollback is rehearsed in stage before production. An unrehearsed rollback blocks promotion.	A
C-F11-16	<code>EXECUTE</code> mode exists only with a recorded Execution Lift. Without one, every write path is unreachable.	A
C-F11-17	D37 has exactly one operator (Invariant #31).	A

ID	Constraint	Class
C-F11-18	Machine Artifacts are never hosted here.	A
C-F11-19	The six constraints in HOST DJ's Pillar 5 are adopted and enforced where checkable: no deprecated or sunset platform; no platform violating a stated compliance requirement (compared against the provider's own sensed attestations, reported as its claims); no deployment steps without a rollback; a monthly cost estimate at the stated scale; a fallback; a YELLOW FLAG above \$500 a month for an MVP, acknowledged in the consent. A plan with more than one primary database platform is refused.	A
C-F11-20	Emitted CI/CD files carry no production credential and no ungated production deploy. Production changes are new runs. A certificate's subject is a specific build (ref and hash), and a different build is not covered.	A
C-F11-21	A health check that does not exercise its dependencies is invalid for verification. Staging includes a negative test in which a dependency is made unavailable and the check must fail.	A
C-F11-22	Destructive rollback or restore actions (database reset, restore, deletion) are never automated and need their own consent line.	A
C-F11-23	An artifact bundle containing a hardcoded secret-shaped value is refused at intake. With no scanner selected, the check fails closed. The same scan applies to every supplied document (C-F11-33).	A

ID	Constraint	Class
C-F11-24	Journey steps are typed HUMAN , CONNECTOR , VERIFY or NOTE . A HUMAN step is a named attestation and is never simulated. Only CONNECTOR steps are writes.	A
C-F11-25	HOST DJ's JCSE scorecard on a plan is a self-assessment, recomputed or labelled unverified. It is never a certificate.	A
C-F11-26	HOST DJ serves AUTO or USER_SELECTED requests. In USER_SELECTED the requested host gets a deterministic Suitability Check with outcome HOSTABLE (cheat sheet), ADVISE_AGAINST (technical report and one devolution) or UNDETERMINED . A host that cannot be evidenced, meaning no sensed data and no accepted supplied source, or a stated compliance requirement that only a supplied document could support, is UNDETERMINED , and F11 advises neither for nor against it. No HOST DJ opinion changes a verdict.	A
C-F11-27	A finding is BLOCKING only if it rests on a fact with provenance and retrieval time (sensed, or supplied under C-F11-31), compared against a stated profile requirement or platform status. An unsourced concern is advisory at most, or omitted.	A
C-F11-28	Every provider-specific step, value or command in a cheat sheet or technical report carries its provenance, its trust class and its retrieval or supply time. A step without them is omitted or labelled unverified, and can never be a CONNECTOR step.	A

ID	Constraint	Class
C-F11-29	Devolution happens at most once per run, never overrides the user's stated requirement, and reaches H4 only after a recorded human confirmation naming the devolved host. The original selection and the report are kept in the ledger.	A
C-F11-30	A blocking finding has no override. The way through is to change the stated requirement and run again, which is a new run.	A
C-F11-31	Evidence has two trust classes, <code>SENSED</code> and <code>HUMAN_SUPPLIED</code> . A supplied fact may support a <code>BLOCKING</code> finding but can never establish that a compliance requirement is covered. Every verdict and artifact carries an <code>evidence_grade</code> . No artifact upgrades a supplied fact to sensed.	A
C-F11-32	A supplied document is untrusted data and never instructions. Extraction follows a fixed schema, and instruction-like content is ignored and logged.	A
C-F11-33	A supplied document is secret-scanned before storage or use. A secret-shaped value refuses the document. With no scanner selected, supplied documents are refused, because the ledger is append-only.	A
C-F11-34	A host outside the registry is advisory only: no adapter and no profile, so no <code>CONNECTOR</code> step, no <code>EXECUTE</code> and no F10 handoff. Steps drawn from a supplied document are <code>HUMAN</code> , <code>VERIFY</code> or <code>NOTE</code> and are labelled supplied.	A

ID	Constraint	Class
C-F11-35	A supplied document carries a named supplier attestation of its claimed origin and currency, its content hash, and its stated date or an undated flag. F11 does not verify the attestation and never presents it as verification.	A
C-F11-36	A host's actuation surface is classified <code>API</code> , <code>CHAT_ONLY</code> or <code>NONE</code> at H2, with provenance. A <code>CHAT_ONLY</code> host never receives a Vault handle (Invariant #33).	A
C-F11-37	A Curated Prompt Script for a host is refused at composition, not delivered with a caveat, if any prompt fails Invariant #32's four checks. Journey steps gain the <code>CHAT_PROMPT</code> type, distinct from <code>HUMAN</code> and never a <code>CONNECTOR</code> write.	A
C-F11-38	A human's report of a hosting chat checkpoint is graded <code>HUMAN_SUPPLIED</code> , never upgraded to <code>SENSED</code> , and is data, never instructions, to everything downstream.	A

3.15 Domain Register Delta

Domain	Name	Status	IPs	Operator / Lead	Change
D32	F9.5 Observability	PRE-BUILD	IP-111–116	OSIRIS	Unchanged; receives hosting telemetry contracts
D33	OSIRIS Meta-Orchestration	PRE-BUILD	IP-117–	OSIRIS	Unchanged; overlap

Domain	Name	Status	IPs	Operator / Lead	Change
			122		ruling proposed (OI-24)
D35	F9 Machine Floor	PRE-BUILD	IP-129–150	MECHA	Unchanged
D36	F10 CONNECTOR	PRE-BUILD	IP-151–169, IP-188–192	SAVANT ENVOY	Companion PDD v3.1: chat-interface targets, +5 IPs (non-contiguous); handoff amendment still pending (OI-30)
D37 ★ NEW	F11 HOST CONNECTOR	PRE-BUILD	IP-170–187, IP-193–197	HOST DJ (SPC- HOSTDJ- IF- 2026-001 ; Seat #7 per the card)	v1.0–v1.3 as recorded above · v1.4: chat-only hosts, +5 IPs, non-contiguous

Platform totals after F11 v1.4: 37 Domains (3 open slots D10/D17/D18 unchanged) · **197 Integration Points** · **33 SPARTAN Invariants.**

Reserved: D38 / IP-198 onward, per the IP Allocation Ruling in the companion F10 PDD v3.1 (Document Control), issued together with this document. F10 v3.1 takes IP-188–192; this document takes IP-193–197. D37 now spans IP-170–187 and IP-193–197, non-contiguously (shared OI-37).

3.16 Open Items

Numbering continues the shared register (OI-01 to OI-20).

ID	Item	Class	Status
OI-21	HOST DJ is a selection card, not an operator profile. The card is in hand (v1.0, 47/50 on its own rubric, HIVE 14D pending). It does not specify accountable operation of a domain that writes. An operator profile is needed and unbuilt. <i>Narrowed:</i> the card was located, which closed the v1.0 gap.	A	OPEN – NARROWED
OI-22	Execution Lift. The Command Centre MVP-PDD defers "execute the deploy" and keeps HOST DJ advisory and credential-free. F11 runs <code>PLAN_ONLY</code> until the Owner lifts the deferral.	A	OPEN – BLOCKING
OI-23	UCG-HOST has no threshold. Blocks production promotion under Invariant #22.	A	OPEN – BLOCKING
OI-24	OSIRIS deployment-layer overlap unadjudicated , and it is unverified which invariant number carries OSIRIS's production standard (the	A	OPEN

ID	Item	Class	Status
	15th in v10.1; Omnibus Alpha lists a similarly named #19 about monitoring output). Also unadjudicated: whether the standard applies to a hosted colonization runtime, and how the card's rollback triggers (5% errors in 15 minutes) relate to OSIRIS's error-rate target.		
OI-25	No provider connector built or assessed. Provider terms, pricing and APIs drift; nothing here is validated.	B	OPEN
OI-26	HSE weights and the platform registry are unvalidated. The weights match the card and the product. The card's 24-platform registry is unsourced and dated May 2026. The F8 registry covers five targets plus Replit Deployments; runtime hosting classes for F10 handoffs have no registry profile.	B	OPEN
OI-27	Compliance regimes named, not assessed. HIPAA, GDPR, SOC 2 and data residency appear in the profile. No provider is judged against them. Needs competent legal review.	A	OPEN
OI-28	Seat and score collisions around HOST DJ and VIBE DJ. The card says HOST DJ is Seat #7 (which the Camelot inventory places in	C	OPEN

ID	Item	Class	Status
	the Bards and Artists group, I profiles, while the card is CD). The Command Centre PDD says Seat 10 (the King's Council group, consistent with CD), where the inventory's roster has HOLMES ULTRA SI. The Command Centre PDD has VIBE DJ at Seat 7 with 48/50; the master registry has it at #24 with 46/50; another source places GRIOT at #7.		
OI-29	Shared Vault and Consent Gate unbuilt. F11 depends on F10's IP-157 and IP-158.	A	OPEN
OI-30	F10 amendment pending. F10 PDD v3.0 must emit the handoffs, require a <code>HostReceipt</code> , and carry the consent cost field.	B	OPEN
OI-31	The card conflicts with F11's invariants. Its CI/CD file auto-deploys to production with a standing token, its health check is a stub, its rollback lists a destructive database step, and its Agent Factory row claims direct agent deployment. Ruled in §3.2.4; the card itself is unchanged and needs a revision or an operator profile.	A	OPEN
OI-32	Only journey Tier A is templated. Tiers B (18 steps) and C (26 steps) are named without steps.	B	OPEN

ID	Item	Class	Status
OI-33	No secret scanner selected or qualified. It gates the intake check for bundles and, since v1.3, every supplied document. Until one is selected, bundle intake fails closed for <code>EXECUTE</code> runs and supplied documents are refused , so the outside-registry route is unavailable.	B	OPEN
OI-34	No score-gap trigger. The Suitability Check advises against a host only for a blocking finding. Whether a viable but clearly weaker host should ever be advised against on score is an Owner decision, and any threshold would be a new number.	C	OPEN
OI-35	Outside-registry hosts: decided, unbuilt, and unverifiable. The Owner decided that a user may name a host outside the registry, with supplied documents as a lower-trust source (§3.5B). Supplied documents cannot be authenticated or checked for currency, so they support advice only, never execution. Depends on OI-33.	B	OPEN – DECIDED
OI-36	Injection and poisoning through supplied documents. The rules (data not instructions, fixed-schema extraction, no upgrade of	B	OPEN

ID	Item	Class	Status
	trust) are untested against adversarial documents.		
OI-37	D37's IP block is non-contiguous (IP-170–187 and IP-193–197), from splitting the D38 frontier with the companion F10 PDD v3.1 rather than leaving it idle. Shared with F10; disclosed, not repaired.	C	OPEN
OI-38a	No secret-shape scanner is wired for Curated Prompt Script intake either, on top of the existing gap for supplied documents (OI-33).	B	OPEN
OI-39	Chat-transcript authenticity is unverifiable , shared with F10 PDD v3.1: F11 cannot confirm a human-pasted exchange with a host's assistant is genuine.	B	OPEN
OI-40	Composed-versus-sourced line undrawn , shared with F10 PDD v3.1: a curated prompt's facts are sourced, its wording is synthesized, and whether Invariant #32 draws that line correctly is unadjudicated.	B	OPEN
OI-10	UCG-COL undefined. Blocks the F10 production route through F11 as well.	A	OPEN – BLOCKING
OI-04	Camelot seat-map collisions.	B	OPEN – ESCALATED

PART 4 — ATOMIC PROMPT

WORKSHEET

Builders · Single Operation · Verifiable I/O · No Compound Logic

CORDON sequence: W1 foundation → W2 intake, profile, registry & sources → W3 plan & advice → W4 consent, devolution & handoff intake → W5 stage & verify → W6 certify, promote, hand off → W7 self-test. No circular dependency. **Critical path:** F11-P01 → F11-P02 → F11-P06 → F11-P07 → F11-P10 → F11-P12 → F11-P13 → F11-P14 → F11-P15 → F11-P16 → F11-P18 → F11-P19 → F11-P21 → F11-P22 → F11-P23 (15 prompts; the self-test F11-P33 follows). *Recomputed for v1.4; the chat-script branch (F11-P34–P38) sits off the critical path because it only runs for `CHAT_ONLY` hosts.*

Code-Late checkpoint: W1 to W2 produce schemas, contracts and types. First implementation code is generated at W3.

WAVE 1 — FOUNDATION

F11-P01 ·  P0 · IP-170 – IP-187 · CLASS A · Deps: none

Operation: Register D37 with IP range 170–187. Record the written amendment that F11 consumes IP-170–187 and that D38 / IP-188+ is reserved. Do not alter D32, D33, D35 or D36.

Output: `{ d37: DomainRecord, reserved_from: 188, amendment_recorded: true }`

Gate: 37 populated domains, 3 open slots, 187 IPs, 31 invariants. Amendment text present. Neighbouring domain records byte-identical.

F11-P02 ·  P0 · IP-184 · CLASS A · Deps: F11-P01

Operation: Define the Run Ledger and Cited Refusal contract. The ledger is append-only with `REVOKE UPDATE, DELETE` at the database

role. Every run gets an `f11_run_id`. Every refusal carries `phase_halted`, `constraint_cited`, `invariant_cited`, `cause`, `required_to_proceed`. Every entry records the mode (`ADVISORY` or `EXECUTE`), each adapter's wiring mode, and the operator identity.

Output: `{ ledger_schema, ddl, refusal_schema }`

Gate: An UPDATE as the application role fails at the database. A refusal with both citation fields null fails serialisation. **No secret value is ever writable to the ledger.**

F11-P03 ·  P0 · IP-186 · CLASS A · Deps: F11-P02

Operation: Implement the Mode Switch and the Execution Lift record. `ADVISORY` is the default. `EXECUTE` is constructible only from a recorded Execution Lift naming the Owner, the date and the scope.

Output: `{ mode_switch, execution_lift_schema }`

Gate: With no Execution Lift, no `ConsentedHostingWrite` can be constructed, verified at the type level. A lift without an Owner identity is rejected.

F11-P04 ·  P0 · IP-172 · CLASS A · Deps: F11-P02

Operation: Define the HOST DJ Adapter interface and its validation boundary per §3.2. The adapter returns the card's Sections A to F as structured data: HSE inputs, primary and fallback cards, journey steps typed `HUMAN`, `CONNECTOR`, `VERIFY` or `NOTE`, deployment-file design, and a JCSE scorecard labelled self-assessment. Every return is schema-validated before it enters the core. Enum returns admit no third value. The adapter has no ledger handle, no mode setter and no Vault handle. Add a static check that the core module tree contains zero LLM client imports.

Output: `{ host_dj_interface, validation_contract, llm_import_scan: { core_modules: number, llm_imports: 0 } }`

Gate: `llm_imports` in the core is exactly 0, verified statically in CI (C-F11-03). A compile-time test asserts the interface exposes no

ledger, mode-setter or Vault member. A schema-invalid return puts the run in CONTAINMENT with no retry.

F11-P05 ·  P0 · IP-185 · CLASS A · Deps: F11-P02

Operation: Implement the Run Completeness Attestation. The ledger constructs a `CompleteHostRun` only when the entries are contiguous from H0 through H5 with no HALT, every adapter's wiring is recorded, and every operator return was validated. Implement the UCG-HOST adapter preflight per §3.10.

Output: { `complete_host_run_type`, `ucg_host_preflight`: 5 }

Gate: A hosting run assembled by hand, with no `f11_run_id`, is rejected before transport, so the rejection holds with UCG in `STUB_REFUSE`. A run containing any HALT can never yield a `CompleteHostRun`. Identities that are not three distinct ones, or an operator that is any of them, are rejected at the same point.

WAVE 2 – INTAKE, PROFILE, REGISTRY & SOURCES

F11-P06 ·  P0 · IP-170 · CLASS A · Deps: F11-P02

Operation: Implement the Intake Eligibility Gate. Require the artifact hash, the certificate record, the source (`F8_BUNDLE` or `F10_HANDOFF`) and a handled artifact class. Refuse Machine Artifacts. For an F8 bundle or a PCE codebase, run a secret-shape scan and refuse a bundle containing a hardcoded secret-shaped value. Accept a `BRIEF` source for `PLAN_ONLY` runs only.

Output: { `intake_result`: "ELIGIBLE" | "REFUSED",
`constraint_cited` }

Gate: An artifact with no certificate record is refused citing Invariant #22. A Machine Artifact is refused citing C-F11-18. A Tier 0 self-assigned certificate is valid; an absent one is not. A `BRIEF` run can never proceed past H3. With no scanner selected (OI-33), the secret-shape check fails closed for any run bound for `EXECUTE`.

F11-P07 · 🚫 P0 · IP-171 · CLASS A · Deps: F11-P06

Operation: Implement the HRP normaliser per §3.4, accepting the card's input forms (an SDD, a PDD, a repository description, a stack list, or a plain-language brief). Enforce mandatory `region`, `compliance[]` and `budgetUsd`. Accept environment keys only, and sanitise keys and descriptions.

Output: `{ hrp, hrp_hash, sanitisation_report }`

Gate: A profile missing any mandatory field is refused, never defaulted (C-F11-06). A value in an environment field is rejected (C-F11-08).

F11-P08 · 🚫 P0 · IP-174 · CLASS A · Deps: F11-P02

Operation: Define the Hosting Connector Adapter interface per §3.6. `provision()`, `deploy()` and `rollback()` accept only a `ConsentedHostingWrite`. `mode` defaults to `STUB_REFUSE`.

Output: `{ connector_interface, default_mode: "STUB_REFUSE" }`

Gate: No overload of a write method accepts any other type. The interface has no plan, ranking or score setter. A newly constructed adapter returns `REFUSED`.

F11-P09 · 🚫 P0 · IP-174 · CLASS A · Deps: F11-P08

Operation: Implement the Hosting Connector Registry and its five onboarding checks. Any failed check blocks addition. Attach a deployment profile per runtime class.

Output: `{ registry, onboarding_checks: 5, deployment_profile_schema }`

Gate: An adapter declaring a wildcard scope is rejected at check 3. An adapter with no declared rollback and teardown, and no irreversibility flag, is rejected at check 4. Demand is not an input.

F11-P10 ·  P0 · IP-175 · CLASS A · Deps: F11-P07, F11-P09

Operation: Implement H2 provider sensing and plan validation through a connector adapter. In `USER_SELECTED` mode, sense the requested host (when it is registered) and the candidate set. Each captured provider constraint carries provenance and retrieval time. Compute `sense_hash`.

Output: { `provider_sense_record`, `sense_hash`, `ttl_status`, `validation_result` }

Gate: A constraint with no provenance is dropped, never marked provisional (C-F11-07). A record older than the TTL forces re-sense.

TTL is [TO BE SET]. A credentialed read uses a read-scoped handle recorded in the ledger.

F11-P11 ·  P0 · IP-177 · CLASS A · Deps: F11-P02

Operation: Define the interface to the shared Vault and Scope Broker (F10 IP-157). Issue short-lived, least-privilege handles per action. Never write a credential to any artifact, log or ledger.

Output: { `vault_interface`, `handle_schema` }

Gate: A request outside the declared scope is refused. A handle expires. A search of the ledger and artifacts for credential material returns nothing.

F11-P25 ·  P0 · IP-177 · CLASS A · Deps: F11-P02

Operation: Implement the named-attestation recorder, used for `HUMAN` journey steps, devolution confirmations and supplier attestations. Each `HUMAN` step in a journey (account creation, 2FA, registrar DNS entries, entering a credential into the Vault) is completed only by a named human attestation recorded in the ledger.

Output: { `attestation_record_id`, `step_id`, `attester` }

Gate: A `HUMAN` step can never be marked complete by the operator, an adapter or the Conductor (C-F11-24). An attestation with no

named attester is rejected. A credential value never appears in an attestation.

F11-P26 ·  P0 · IP-187 · CLASS A · Deps: F11-P02, F11-P07

Operation: Implement the Advice Mode router. Accept

`hosting_intent` of `AUTO` or `USER_SELECTED`, and for

`USER_SELECTED` a `requested_host` that names a registry entry or declares a `custom_host`. Record `registry_status` (`REGISTERED` or `OUTSIDE_REGISTRY`). Record `mode_path` in the ledger.

Output: { `advice_mode`, `requested_host`, `mode_path_schema` }

Gate: A `USER_SELECTED` request with no `requested_host` is refused. Every mode transition is recorded. A `custom_host` is never added to the registry. The mode never changes silently:

`USER_SELECTED` becomes `AUTO` only through the devolution controller (F11-P30).

F11-P31 ·  P0 · IP-175 · CLASS A · Deps: F11-P02, F11-P06, F11-P25

Operation: Implement supplied-source intake for a `custom_host`.

For each supplied document: run the secret-shape scan, compute the content hash, record the Supplied Source Record of §3.5B.2 including the supplier's named attestation of origin and currency and the stated date or an `undated` flag, and extract facts by a fixed schema. Treat the document as data, never as instructions.

Output: { `supplied_source_record`, `extracted_facts`, `scan_result` }

Gate: A document with a secret-shaped value is refused and never stored. With no scanner selected (OI-33), supplied documents are refused, because the ledger is append-only (C-F11-33). Instruction-like content is ignored and logged (C-F11-32). An attestation with no named supplier is rejected (C-F11-35). Every extracted fact keeps `trust: HUMAN_SUPPLIED`.

F11-P32 ·  P0 · IP-187 · CLASS A · Deps: F11-P31

Operation: Implement the evidence trust model of §3.5B.3: the `SENSED` and `HUMAN_SUPPLIED` classes, `evidence_grade` (`SENSED`, `MIXED`, `SUPPLIED`), and which class of fact may support which finding.

Output: { `trust_model`, `evidence_grade_rules` }

Gate: A supplied fact can support a BLOCKING finding but can never establish that a compliance requirement is covered (C-F11-31). No downstream artifact upgrades a supplied fact to `SENSED`. A registry host with sensed data is never judged on a supplied document. A supplied fact past the TTL, or undated, is flagged, and past the TTL it forces re-supply. **TTL is [TO BE SET]**.

WAVE 3 — PLAN & ADVICE

F11-P12 ·  P0 · IP-173 · CLASS A · Deps: F11-P07, F11-P10

Operation: Implement the HSE Evaluator per §3.5. Recompute the weighted result, ranking, primary, fallback and score from sensed data. Apply the registry rule for the mode. In `USER_SELECTED` mode, also score the requested host on the same eight criteria, for the Suitability Check and the comparison.

Output: { `hse_result`: { `matrix`, `weights`, `ranking`, `primary`, `fallback`, `score` }, `registry_check` }

Gate: Weights sum to exactly 100. A ranking supplied by any other component is never used. A host with no adapter and profile is not recommendable in `EXECUTE` mode.

F11-P13 ·  P0 · IP-172 · CLASS A · Deps: F11-P04, F11-P12

Operation: Implement the HOST DJ plan request through the adapter. HOST DJ supplies its Sections B to F: rationale, the journey tier (A, B or C) with typed steps, deployment-file design, and a self-assessment scorecard. It does not supply the ranking. In `USER_SELECTED` mode it also supplies the explanation text for the

cheat sheet or the technical report, and never the verdict.

Output: { rationale, journey, deployment_file_design }

Gate: Any ranking, score, primary or fallback field in the adapter's return is discarded and logged. With the adapter stubbed, the run ends PLAN_ONLY with the cause stated. A monthly cost estimate at the stated scale and a fallback are required in the return (C-F11-19). A plan above \$500 a month for an MVP carries a YELLOW FLAG. Tier B and Tier C journeys are PLAN_ONLY until templates exist (OI-32).

F11-P14 ·  P0 · IP-176 · CLASS A · Deps: F11-P13

Operation: Implement journey and deployment-file emission: an environment template with keys only plus an allowlisted non-secret config_defaults block; a CI file with no production credential and no ungated production deploy; a health check that pings its dependencies; and a rollback procedure with destructive steps typed. Type every journey step HUMAN, CONNECTOR, VERIFY or NOTE.

Output: { env_template, ci_file, health_check, rollback_procedure }

Gate: The environment template passes the keys-only check (C-F11-08). A rollback procedure is present for every write the journey contains. A secret-shaped hint in the template is stripped. A CI file that deploys to production on push is rejected (C-F11-20). A health check that does not ping its dependencies is rejected (C-F11-21).

F11-P27 ·  P0 · IP-187 · CLASS A · Deps: F11-P12, F11-P26, F11-P32

Operation: Implement the Suitability Check for USER_SELECTED. Compare the requested host's facts, each with provenance, trust class and retrieval or supply time (sensed, or supplied under the trust rules), against the stated profile requirements and platform status. Classify each finding BLOCKING or ADVISORY per §3.5A.1.

Emit `HOSTABLE` , `ADVISE_AGAINST` or `UNDETERMINED` .

Output: { `suitability_verdict`, `findings`,
`hse_scores_requested_host`, `hse_comparison` }

Gate: A finding is `BLOCKING` only if it rests on a sensed fact with provenance (C-F11-27). Any `BLOCKING` finding yields `ADVISE_AGAINST` . A host that cannot be evidenced yields `UNDETERMINED` , never a verdict for or against. Every verdict carries an `evidence_grade` . A score gap alone is never blocking. No model output changes the verdict.

F11-P28 ·  P0 · IP-187 · CLASS A · Deps: F11-P14, F11-P27

Operation: Implement the Cheat Sheet generator for a `HOSTABLE` verdict, to the schema in §3.5A.2: verdict line, fit summary, prerequisites, typed steps, environment keys, transformed CI/CD guidance, verification checklist with the negative health test, rollback, cost, caveats, sources and limits, opening with the evidence-grade banner (§3.5B.4).

Output: { `hosting_cheat_sheet` }

Gate: Every provider-specific step, value and command carries provenance, trust class and retrieval or supply time, or is omitted or labelled unverified and can never be a `CONNECTOR` step (C-F11-28). The sheet contains no environment value and asserts no certification or compliance (C-F11-12).

F11-P29 ·  P0 · IP-187 · CLASS A · Deps: F11-P27

Operation: Implement the Technical Report generator for `ADVISE_AGAINST` , to the schema in §3.5A.3: verdict, requirement summary, blocking findings each with requirement, sensed fact, provenance and retrieval time, advisory findings, the HSE comparison against the devolved host, what would have to change, and sources, opening with the evidence-grade banner (§3.5B.4).

Output: { `hosting_technical_report` }

Gate: Each blocking finding shows its sensed evidence, and a

finding with none is rejected as blocking (C-F11-27). "What would have to change" states specifics from sensed data, or states that the host cannot be made viable. The report contains no persuasion beyond the evidence.

F11-P15 ·  P0 · IP-173 · CLASS A · Deps: F11-P12, F11-P13, F11-P14, F11-P26, F11-P27

Operation: Implement the Plan Gate. Construct a `HostingPlan` only when the HRP is complete, the HSE result was recomputed within the TTL, the registry rule holds, the deployment files pass, and the binding `hash(artifact_hash, hrp_hash, sense_hash, f11_run_id)` is recorded. In `USER_SELECTED` mode with a `HOSTABLE` verdict, the requested host is the primary and the best other candidate is the fallback.

Output: `{ hosting_plan, binding }`

Gate: Only this gate can construct a `HostingPlan` (Invariant #28). A plan from another run, artifact or profile is rejected. In `ADVISORY` mode the plan is the run's final product.

F11-P34 ★ ·  P0 · IP-193 · CLASS A · Deps: F11-P10

Operation: Extend H2 SENSE to classify a host's actuation surface (`API`, `CHAT_ONLY`, `NONE`) with provenance, independent of `registry_status`.

Output: `{ host_actuation }`

Gate: A classification with no provenance is refused. `CHAT_ONLY` requires a positive, sourced statement that the host's own assistant is the documented setup surface for the task at hand, never an inference from a missing connector.

F11-P35 ★ ·  P0 · IP-194 · CLASS A · Deps: F11-P34, F11-P13, F11-P28

Operation: Implement the Chat Script Composer for hosting: on

`CHAT_ONLY` , build a draft `CuratedPromptScript` from the HRP and sensed host-capability facts only.

Output: `{ cps_host_draft }`

Gate: The composer has no method that accepts a credential. Every prompt's provenance list is non-empty before the draft leaves this prompt.

F11-P37 ★ · 🚫 P0 · IP-195 · CLASS A · Deps: F11-P35

Operation: Validate the draft CPS-HOST against Invariant #32's four rules (grounding, no guardrail-bypass, no secret content, atomicity-and-checkpoint), reusing F10 PDD v3.1's validator design unchanged. Feed the validated script into the cheat sheet's Steps section as typed `CHAT_PROMPT` entries.

Output: `{ cps_host_validated, cheat_sheet_steps_chat_prompt }`

Gate: A script with any failing prompt is refused whole, not filtered to the passing ones. `CHAT_PROMPT` steps never carry a `CONNECTOR` capability.

WAVE 4 – CONSENT, DEVOLUTION & HANDOFF INTAKE

F11-P16 · 🚫 P0 · IP-177 · CLASS A · Deps: F11-P15, F11-P11, F11-P03

Operation: Implement the hosting extension of the Consent Gate. Present the exact content, account, project, region and cost ceiling at approval. Check that the credential's account equals the consent's account. Give destructive, public-exposure and DNS actions their own consent lines. Produce a `ConsentedHostingWrite` from a `HostingPlan` , a consent record, a scoped handle and a rollback declaration. Consent #1 is for staging and consent #2 for production. Record a YELLOW FLAG acknowledgement where the plan carries one.

Output: `{ consented_hosting_write, consent_record_id,`

stage: "STAGE" | "PRODUCTION" }

Gate: Only this gate can construct a `ConsentedHostingWrite`, and only in `EXECUTE` mode. A consent with no cost ceiling is refused (C-F11-09). Consent #1 cannot be used for production. A destructive action with no explicit line is refused, and a destructive rollback step has its own line (C-F11-22). A plan carrying a YELLOW FLAG with no acknowledgement is refused.

F11-P17 ·  P0 · IP-182 · CLASS A · Deps: F11-P06, F11-P07

Operation: Implement the F10 Handoff Port intake. Validate an `F10Handoff` per §3.9: built by F10's conductor, SAVANT verdict bound, `phaseReached` consistent with `kind`, and a `UCG-COL` reference for `PRODUCTION_HOST`. Normalise its runtime requirements into an HRP.

Output: { `handoff_validation`, `hrp_from_handoff` }

Gate: A hand-made handoff is rejected and logged as a KILLZONE event. `STAGING_HOST` with no verdict binding is refused. `PRODUCTION_HOST` with no `UCG-COL` reference is refused (Invariant #30).

F11-P30 ·  P0 · IP-187 · CLASS A · Deps: F11-P15, F11-P27, F11-P29, F11-P25

Operation: Implement the Devolution controller. On `ADVISE_AGAINST`, run the `AUTO` HSE ranking once over the already-sensed candidate set with the requested host excluded, construct the devolved `HostingPlan` through the Plan Gate, and require a `DevolutionConfirmation`: a named human attestation naming the devolved host, before H4.

Output: { `devolved_hosting_plan`, `devolution_record`, `devolution_confirmation_required: true` }

Gate: Devolution happens at most once per run (C-F11-29). The devolved plan inherits neither the user's selection nor any consent. H4 refuses without the confirmation. If no candidate is viable, the

run ends `REFUSED` with the report attached. No path overrides a blocking finding (C-F11-30).

WAVE 5 – STAGE & VERIFY

F11-P18 ·  P0 · IP-178 · CLASS A · Deps: F11-P16, F11-P03

Operation: Implement staged provision and deploy into an isolated **staging host** through the connector adapter, using a

`ConsentedHostingWrite` for `STAGE`. Snapshot state first so rollback is possible. Monitor spend against the consented ceiling.

Output: { `stage_result`, `rollback_handle`, `staging_host_ref`, `spend_to_date` }

Gate: The staging host is isolated from users and production data. A write with no rollback handle is refused. Spend beyond the ceiling halts the run in `CONTAINMENT`. The write methods accept no other type.

F11-P19 ·  P0 · IP-179 · CLASS A · Deps: F11-P18

Operation: Implement in-stage verification: run the health check and the smoke suite against the staging host, then **rehearse the rollback**. Include a negative health test in which a dependency is made unavailable and the check must fail, and the card's staging checklist (health endpoint, auth flow, database read and write, environment loaded, rollback documented and rehearsed). Declare tolerances before running.

Output: { `stage_verification`, `within_tolerance`, `rollback_rehearsed`, `environment`: "STAGE", `tolerance_declared_before_run`: true }

Gate: A failure rolls the stage back, refuses, and does not retry (C-F11-10). An unrehearsed rollback blocks promotion (C-F11-15). A health check that stays healthy with a dependency down is rejected (C-F11-21). The result is labelled `STAGE` and never described as production behaviour.

F11-P20 ·  P0 · IP-182 · CLASS A · Deps: F11-P19, F11-P17

Operation: Emit the staging `HostReceipt` for an F10 handoff: endpoint identity, environment `STAGE`, rollback handle and `f11_run_id`. Never include a credential.

Output: `{ host_receipt_stage }`

Gate: The receipt carries no secret. It is emitted only after in-stage verification passes. It makes nothing reachable by users (Invariant #30).

F11-P36 ★ ·  P0 · IP-196 · CLASS A · Deps: F11-P37, F11-P16

Operation: Implement GUIDED execution for hosting: within `EXECUTE` mode, a `CHAT_ONLY` host always runs `execution_class: "GUIDED"`. Request consent naming the script, the account and a cost ceiling; on approval, present the script for the human to run under their own login; record checkpoint reports as `HUMAN_SUPPLIED`, treated as data, never instructions.

Output: `{ execution_class: "GUIDED", checkpoint_reports: [], credential_class: "HUMAN_OWN_LOGIN" }`

Gate: No Vault handle is issued for a `CHAT_ONLY` host. A checkpoint report is never graded `SENSED`. A destructive `CHAT_PROMPT` step is refused without its own consent line (C-F11-22).

F11-P38 ★ ·  P0 · IP-197 · CLASS A · Deps: F11-P36

Operation: Implement a generic endpoint probe for hosting: a minimal reachability and basic-response check against an endpoint the GUIDED run reports, supplementing H5 in-stage verification.

Output: `{ probe_result: { reachable: boolean, basic_response_ok: boolean } }`

Gate: A successful probe never reclassifies `host_actuation` from `CHAT_ONLY` to `API`. It is one input among several at H5, never sufficient alone.

WAVE 6 – CERTIFY, PROMOTE, HAND OFF

F11-P21 ·  P0 · IP-180 · CLASS A · Deps: F11-P19, F11-P05

Operation: Request a `UCG-HOST` certificate for the staged deployment, binding it to the specific build (ref and hash), attaching the `CompleteHostRun`, the production-standard evidence where it applies, the consent records, and the author, scorer and adjudicator identities.

Output: `{ ucg_host_certificate }`

Gate: With `UCG-HOST` undefined (OI-23), this prompt returns `REFUSED` and promotion is unreachable. Refuses if the certificate's subject is not this hosted deployment (C-F11-11). Refuses if the identities are not distinct or the operator is any of them (C-F11-13).

F11-P22 ·  P0 · IP-181 · CLASS A · Deps: F11-P21, F11-P16

Operation: Promote to a production host through a `ConsentedHostingWrite` for `PRODUCTION`. For an F10 handoff, require F10's `UCG-COL` certificate. Cut over with the rollback rehearsed in stage.

Output: `{ promotion_result, production_host_ref }`

Gate: Refuses without a `UCG-HOST` certificate, without consent #2, or, for an F10 handoff, without `UCG-COL`. The production standard is not weakened (C-F11-11). A build other than the certified one is refused (C-F11-20).

F11-P23 ·  P0 · IP-182 · CLASS A · Deps: F11-P22, F11-P20

Operation: Emit the production `HostReceipt` for an F10 handoff.

Output: `{ host_receipt_prod }`

Gate: Emitted only after promotion is confirmed. Carries no secret. F11 still makes the runtime reachable only under F10's promotion consent (Invariant #30).

F11-P24 ·  P0 · IP-183 · CLASS A · Deps: F11-P22

Operation: Register the promoted hosting record's telemetry contract with F9.5 (D32) and write the hosting record. Carry the `f10_run_id` where present.

Output: { telemetry_contract_id, hosting_record_id }

Gate: No hosting record without a registered monitoring contract (C-F11-14). F11 registers hosting telemetry only and never F10's colonization telemetry.

WAVE 7 – SELF-TEST

F11-P33 ·  P0 · CLASS A · Deps: F11-P01 ...
F11-P38

Operation: Run the worksheet against itself.
Confirm each of the following is refused at its named phase, cited and ledgered: (a) a write with no `HostingPlan`; (b) a ranking supplied by the HOST DJ Adapter that differs from the recompute; (c) a host with no adapter or profile in `EXECUTE` mode; (d) `EXECUTE` attempted with no Execution Lift; (e) a write with no consent record; (f) a consent with no cost ceiling; (g) an environment template containing a value; (h) a credential request outside scope; (i) a hand-made `F10Handoff`; (j) `STAGING_HOST` with no verdict binding; (k) `PRODUCTION_HOST` with no `UCG-COL`; (l) exposure of a colonization's runtime before

F10's promotion consent; (m) production promotion with UCG-HOST undefined; (n) a hosting run assembled by hand with no f11_run_id, rejected at the UCG-HOST preflight; (o) identities that are not three distinct ones, or an operator that is one of them; (p) an LLM client import in the core, which fails the build; (q) a HOST DJ Adapter attempt to set a mode or write the ledger, which has no interface to do so; (r) stale provider data, forcing re-sense; (s) a stage health-check failure, with rollback and no retry; (t) a Machine Artifact at intake; (u) a missing production-standard evidence on the F8 route; (v) spend beyond the ceiling, halting in CONTAINMENT; (w) a CI file that deploys to production on push or holds a production credential; (x) a health check that stays healthy with a dependency down; (y) a hardcoded secret-shaped value in a bundle, or the scanner absent, failing closed; (z) a HUMAN step marked complete without a named attestation; (aa) a plan above \$500 a month for an MVP with no acknowledged YELLOW FLAG; (ab) a BRIEF run attempting to pass H3; (ac) a request to host

an agent or colonization that did not come through an `F10Handoff` ; (ad) a `USER_SELECTED` request for a host with a blocking finding, which gets `ADVISE_AGAINST` , a technical report and one devolution, and never a cheat sheet; (ae) a cheat-sheet step with no provenance, which is omitted or labelled unverified and is never a `CONNECTOR` step; (af) a devolved host reaching H4 with no human confirmation naming it; (ag) a second devolution, or a loop between modes; (ah) a `USER_SELECTED` request for a host with no sensed data, which is `UNDETERMINED` and neither advised for nor against; (ai) a technical-report finding with no sensed evidence classed as blocking; (aj) any attempt to override a blocking finding; (ak) a supplied document containing a secret-shaped value, refused and never stored, and any supplied document with the scanner absent, refused; (al) a supplied document claiming a compliance certification, which cannot clear a stated compliance requirement and yields `UNDETERMINED` ; (am) a supplied document stating a blocking fact, which yields `ADVISE_AGAINST` ; (an) an instruction

embedded in a supplied document, ignored and logged; (ao) a custom host reaching `EXECUTE`, or a step drawn from a supplied document typed `CONNECTOR`; (ap) a supplied fact appearing downstream as sensed; (aq) an undated or stale supplied document, flagged or forced to re-supply; (ar) a custom host named as an F10 handoff target; (as) a supplied document for a registry host with sensed data, recorded and not used; (at) a Curated Prompt Script for a host containing a guardrail-bypass instruction, refused at composition; (au) a prompt containing secret-shaped text, refused at composition; (av) a `CHAT_ONLY` host for which a Vault handle is requested, which the interface cannot construct; (aw) a hosting chat checkpoint report used as though it were `SENSED`, rejected; (ax) a `CHAT_PROMPT` step executed as a `CONNECTOR` write, rejected at the type level.

Output: { refused_at_named_phase: 50/50, ledgered: true }

Gate: All fifty true. A test that passes because the run never reached that phase does not count.

PART 5 — RISK REGISTER

Risk	Sev	Mitigation
A deploy with no plan	 Critical	Invariant #28; <code>ConsentedHostingWrite</code> cannot exist without a <code>HostingPlan</code> . F11-P33 (a)
A model-written ranking treated as fact	 Critical	The HSE Evaluator recomputes; the adapter's ranking fields are discarded. F11-P33 (b)
A write with no consent, or a reused consent	 Critical	Invariant #29; F11-P33 (e)
Uncapped spend	 Critical	Cost ceiling in every consent; CONTAINMENT on overrun. F11-P33 (f), (v)
A secret in an artifact, log or ledger	 Critical	C-F11-08; keys-only templates; opaque handles; the ledger refuses secret values
An unverified colonization exposed to users	 Critical	Invariant #30; staging hosts are isolated; production needs <code>UCG-COL</code>
A forged F10 handoff	 Critical	<code>F10Handoff</code> constructible only by F10's conductor; KILLZONE on a forgery. F11-P33 (i)
Production promotion without a certificate	 Critical	Invariant #22 applies; <code>UCG-HOST</code> ; unreachable until OI-23 closes

Risk	Sev	Mitigation
A path around the OSIRIS production standard	 Critical	Production needs the standard (F8 route) and UCG-HOST ; F11 restates no weaker number. OI-24
Hand-assembled hosting bypasses the operator	 Critical	Invariant #31; only the ledger constructs a CompleteHostRun
The advisory boundary erodes silently	 High	EXECUTE needs a recorded Execution Lift (C-F11-16); HOST DJ has no credential or mode access
Operator is a selection card, not an operator profile	 High	Disclosed in Document Control, §1.8, §3.2 and SOLVA ground 1. OI-21
An auto-deploy pipeline becomes a standing production write path	 Critical	C-F11-20; emitted pipelines carry no production credential and no ungated production deploy. F11-P33 (w)
A stub health check passes a broken deploy	 High	C-F11-21; the negative health test. F11-P33 (x)
A destructive rollback step is run as routine	 Critical	C-F11-22; typed, never automated, own consent line
A HUMAN step is marked done by the system	 High	C-F11-24; named attestation only. F11-P33 (z)

Risk	Sev	Mitigation
The card's agent-deployment claim bypasses F10	 Critical	Not adopted; hosting a colonization only through F10Handoff . F11-P33 (ac). OI-31
A hardcoded secret ships in a bundle	 High	C-F11-23; fails closed while no scanner is selected. OI-33
A cheat sheet carries remembered, outdated commands	 Critical	C-F11-28; provenance and retrieval time on every provider-specific step, or omitted or labelled unverified. F11-P33 (ae)
"Advise against" rests on opinion, not evidence	 High	C-F11-27; a blocking finding needs a sensed fact. F11-P33 (ai)
The user's host is quietly swapped for another	 Critical	C-F11-29: one devolution at most and a named human confirmation. F11-P33 (af), (ag)
A blocking finding is overridden, becoming a path around the check	 High	C-F11-30: no override; change the requirement and re-run. F11-P33 (aj)
A host is advised for or against without evidence	 High	UNDETERMINED , a cited refusal. F11-P33 (ah). OI-35

Risk	Sev	Mitigation
A supplied document is forged or outdated and treated as authority	 High	Lower-trust class, a grade on every artifact, no upgrade, a TTL, and no execution from it (C-F11-31, C-F11-34). F11-P33 (ap), (aq). OI-35
A supplied document carries instructions or a secret	 High	Data, not instructions (C-F11-32); secret scan before storage (C-F11-33). F11-P33 (ak), (an). OI-36
A supplied compliance claim clears a compliance requirement	 Critical	Rule T3: a supplied fact can never establish coverage. F11-P33 (al)
A custom host slips into execution or an F10 handoff	 Critical	C-F11-34: no adapter, no profile, no receipt. F11-P33 (ao), (ar)
A curated prompt talks a host's own AI assistant into skipping its guardrails	 Critical	Invariant #32 rule 2; refused at composition. F11-P33 (at).
A secret is typed into a host's chat box	 Critical	Invariant #32 rule 3; refused at composition. F11-P33 (au).

Risk	Sev	Mitigation
A <code>CHAT_ONLY</code> host write gets a Vault credential anyway	 Critical	Invariant #33; no such method exists. F11-P33 (av).
A <code>CHAT_PROMPT</code> step silently becomes an automated write	 High	Typed distinctly from <code>CONNECTOR</code> ; rejected at the type level. F11-P33 (ax).
Provider data drifts	 High	Provenance, retrieval time and TTL; forced re-sense. TTL unset
Compliance or region mismatch	 High	Mandatory <code>region</code> and <code>compliance[]</code> ; comparison against sensed terms; C-F11-12 bans compliance claims. OI-27
Stage passes, production behaves differently	 High	<code>STAGE</code> labelling; rollback rehearsed; production standard evidence
Overlapping deployment layers (F11 vs OSIRIS)	 High	Proposed ruling in §3.1; OI-24
HSE weights bias the plan	 Medium	Weights shown in every plan; changes are version changes. OI-26
Lock-in undisclosed	 Medium	Lock-in is a scored criterion and shown
Shared Vault unbuilt	 High	OI-29; F11 stays <code>STUB_REFUSE</code> until wired

PART 6 – GLOSSARY

Term	Definition
F11 HOST CONNECTOR	D37. Hosting integration: plan, connect, stage, verify, certify, promote, hand off.
HOST DJ	The operating SPC of D37. Documented as the hosting decision and deployment journey capability (JCSE 47/50, Seat 10, per the Command Centre PDD).
YELLOW FLAG	HOST DJ's advisory flag: a plan above \$500 a month for an MVP, or a clearly non-viable request. It must be acknowledged in the consent.
Advice mode	AUTO (HOST DJ advises the best host) or USER_SELECTED (the user names a host).
Suitability Check	The deterministic comparison of a requested host's sensed facts against the stated requirements. Outcomes HOSTABLE , ADVISE_AGAINST , UNDETERMINED .
Cheat sheet	The concise, provenance-bound guide to hosting on a HOSTABLE requested host (§3.5A.2).

Term	Definition
Technical report	The evidence-bound case against a requested host, with what would have to change (§3.5A.3).
Devolution	The single fall-back from <code>USER_SELECTED</code> to <code>AUTO</code> after <code>ADVISE_AGAINST</code> , confirmed by the human by name (§3.5A.4).
Custom host	A host the user names that is not in the registry. Advice only (§3.5B).
Supplied Source Record	The ledger record of a user-supplied document: origin claim, supplier, dates, hash, scan result, attestation, trust class <code>HUMAN_SUPPLIED</code> .
Evidence grade	<code>SENSED</code> , <code>MIXED</code> or <code>SUPPLIED</code> : what kind of evidence a verdict or artifact rests on.
<code>CHAT_ONLY</code> host	A host whose only documented setup surface is its own chat assistant.
Curated Prompt Script (CPS-HOST)	The sequenced, provenance-bound, safety-checked prompt list for a <code>CHAT_ONLY</code> host, adopted from F10's design.
<code>CHAT_PROMPT</code> step	A journey-step type for a human-mediated action driven by one specific curated prompt; never a <code>CONNECTOR</code> write.
GUIDED execution	The human performs the write under their own login; F11 holds no

Term	Definition
	credential for that host.
Journey step classes	HUMAN (a named attestation), CONNECTOR (a write under consent), VERIFY (a check), NOTE (information).
HSE / DJG / SDF	HOST DJ's three features: the Hosting Selector Engine, the Deployment Journey Generator and the Seamless Deployment Facilitator.
F8-HDJ	The HOST DJ engine live in the ATANDA Command Centre product. Advisory only.
F11 Host Conductor	The deterministic runtime that enforces the F11 protocol. Not an SPC.
HRP	Hosting Requirements Profile: stack, database fit, compliance, region, traffic ceiling, budget, plus F11's extensions.
HSE	The eight-criterion host scoring matrix used by F8-HDJ. Its expansion is not given in the sources checked.
HostingPlan	A recomputed, bound hosting plan. Only the Plan Gate can construct one.
ConsentedHostingWrite	A plan with a consent record, a cost ceiling, a scoped credential and a

Term	Definition
	rollback. Only the Consent Gate can construct one.
F10Handoff	The request from F10 for a staging or production host. Only F10's conductor can construct one.
HostReceipt	F11's reply to F10: endpoint identity, environment, rollback handle. No credential.
CompleteHostRun	A value only the ledger can construct, proving contiguous H0–H5 entries with no HALT (Invariant #31).
Execution Lift	The Owner's recorded decision to permit EXECUTE mode.
UCG-HOST	Proposed certificate class for a hosted deployment. Threshold unset.
Staging host	An isolated host used as a test article. Never reachable by users.
Terminal state	One of HOSTED_PRODUCTION , STAGED_HOSTED , PLAN_ONLY , REFUSED .

FORGE CERTIFICATION BLOCK

```

PDD v1.4
|| ASSEMBLED VIA ATLAS ULTRA SI · TIER 0 · SELF-
ASSIGNED
=====
||
|| PRODUCTION ID      : JNGL-ARKH-F11HC-2026-005
||
|| SUPERSEDES         : -004 (v1.3); through it -003,
-002, -001
||
|| DOMAIN             : D37 – F11 HOST CONNECTOR
||
|| IP RANGE           : IP-170-187, IP-193-197 (23;
non-contiguous)
||
|| OPERATING SPC      : HOST DJ SPC-HOSTDJ-IF-2026-001
v1.0
||
||                   : JCSE 47/50 (own rubric) · HIVE
14D pending
||
|| ADVICE MODES       : AUTO · USER_SELECTED (cheat
sheet /
||
||                   : technical report + devolution)
· outside-registry
||
||                   : NEW: CHAT_ONLY host – Curated
Prompt Script
||
|| ENGINE PRECEDENT   : F8-HDJ – advisory only, live in
a product
||
|| CONDUCTOR          : F11 Host Conductor –
deterministic, no LLM
||
|| RUN                : H0 INTAKE · H1 PROFILE · H2
SENSE · H3 PLAN ·
||
||                   : H4 CONSENT & STAGE · H5 VERIFY
IN STAGE ·
||
||                   : H6 CERTIFY · H7 CONSENT &
PROMOTE ·
||
||                   : H8 HAND OFF
||
||
|| TERMINAL STATES    : HOSTED_PRODUCTION ·
STAGED_HOSTED ·
||
||                   : PLAN_ONLY · REFUSED
||
|| HANDOFF            : F10 CONNECTOR – STAGING_HOST ·
PRODUCTION_HOST
||

```

	INVARIANTS	:	#28 Plan-Gated Hosting
			#29 Consent-Gated Hosting
Writes			
			#30 F10 Handoff Integrity
			#31 The Single Operator (D37)
			#32/#33 adopted from F10 PDD
v3.1			
	PLATFORM TOTALS	:	37 Domains · 197 IPs · 33
Invariants	· 3 open slots		
	RESERVED	:	D38 / IP-198 onward
	ATOMIC PROMPTS	:	39 (F11-P01 – F11-P33) · 7
waves	· 15-prompt path		
	SOLVA VERDICT	:	CONDITIONALLY VIABLE –
published	as issued (\$2.5)		
	JCSE	:	Self-assigned Tier 0 – not
scored	– NOT HIVE-certified		
	GRO STATE	:	SAFE_LIFE
	HONESTY GATE G3	:	OI-21 HOST DJ is a selection
card,	not an operator		
			OI-22 Execution Lift – RUNS
PLAN_ONLY	until lifted		
			OI-23 UCG-HOST undefined –
PROMOTION	BLOCKED		
			OI-33 no secret scanner for
supplied	documents		
			OI-37 D37 IP block non-
contiguous	(disclosed)		
			OI-38a no secret scanner for
chat-prompt	intake		
			OI-39 chat-transcript
authenticity	unverifiable		
			OI-40 composed prompt wording
vs sourced	facts		
			Advisory today – no provider is
ever written	to		
			Zero live testing on any

```
provider
|| OWNER : Oluseye Shay Amusa / Koncentric
Labs Inc.
||
|| © 2026 Koncentric Labs Inc. · ATANDA Publications
Forum
||
||
||
```

VERSION HISTORY

Version	Date	Change	Author
1.0	Sept 2026	Initial issue. D37 registered, IP-170–186. Invariants #28 (Plan-Gated Hosting), #29 (Consent-Gated Hosting Writes), #30 (F10 Handoff Integrity), #31 (The Single Operator). HOST DJ adopted as the operating SPC at its documented capability, with the gap in its documentation disclosed. Nine-phase run with an advisory default and a staged, two-consent promotion. F10 handoff protocol (staging and production). UCG-HOST proposed with no threshold. Twenty-five atomic prompts. OI-21 to OI-30 opened.	ATLAS ULTRA SI
1.1	Sept 2026	HOST DJ card integrated. The Owner supplied HOST_DJ_SPC_v1_0 , which v1.0 had reported as not located. Operating-SPC identity, class, DNA, seat, mode, features and constraints now come from the card. Eighteen card-versus-F11	ATLAS ULTRA SI

Version	Date	Change	Author
		rulings added (§3.2.4), including that the card's CI/CD file, health check, rollback and agent-deployment claim are not adopted as written. Constraints C-F11-19 to 25 added. Input source BRIEF (PLAN_ONLY only). Journey step classes and the human-step attestation recorder (F11-P25). Self-test moves to F11-P26 and grows to 29 checks. OI-21 narrowed and rewritten; OI-24, OI-26, OI-28 extended; OI-31 to OI-33 opened. Not re-scored.	
1.2	Sept 2026	Advice modes. HOST DJ serves AUTO requests (advise the best host) or USER_SELECTED requests (the user names a host). A deterministic Suitability Check gives HOSTABLE (a cheat sheet), ADVISE_AGAINST (a technical report and one devolution to AUTO, confirmed by the human by name) or UNDETERMINED (a cited refusal; added because a host that cannot be sensed cannot honestly be advised on). Seven blocking classes, no override, no score-gap trigger. IP-187 added. Constraints C-F11-26 to 30 and prompts F11-P26 to P30 added. Self-test moves to F11-P31 and grows to 36 checks. OI-34 and OI-35 opened. Not re-scored.	ATLAS ULTRA SI

Version	Date	Change	Author
1.3	Sept 2026	Outside-registry hosts and supplied sources (Owner decision, closing the design question in OI-35). A user may name a host outside the registry and supply documents about it. Documents are a lower-trust source: two trust classes, an <code>evidence_grade</code> on every verdict and artifact, supplied facts that may block but never clear a compliance requirement, no upgrade to sensed, secret scanning before storage, data-not-instructions handling, and a supplier attestation F11 does not verify. A custom host is advice only, never <code>EXECUTE</code> and never an F10 handoff target. Constraints C-F11-31 to 35, prompts F11-P31 and P32 added; F11-P25 no longer depends on the journey and moves to W2; self-test is F11-P33 with 45 checks. OI-35 rewritten, OI-33 extended, OI-36 opened. Not re-scored.	ATLAS ULTRA SI
1.4	Sept 2026	Chat-only hosts. Adopts F10 PDD v3.1's Invariants #32 (Curated Chat-Script Integrity) and #33 (Guided Execution Accountability) unchanged. New <code>host_actuation</code> classification independent of registry status. For <code>CHAT_ONLY</code> , the cheat sheet's steps become a Curated Prompt Script (CPS-HOST), and journey steps gain a fifth type, <code>CHAT_PROMPT</code> , never a <code>CONNECTOR</code> write. GUIDED	ATLAS ULTRA SI

Version	Date	Change	Author
		execution: the human runs the script under their own login, no Vault credential, checkpoint reports graded HUMAN_SUPPLIED . A generic endpoint probe supplements verification. Worked from Hostinger's agentic/vibe-coding mode as an [EXT] example. Five IPs (193–197) taken from the shared D38 frontier alongside F10 v3.1, disclosed as non-contiguous (OI-37). Three constraints and five prompts (F11-P34–P38) added; self-test is F11-P33 with 50 checks. OI-38a and shared OI-39, OI-40 opened. Not re-scored.	

AUTHORSHIP & PROVENANCE

Assembled by: ATLAS ULTRA SI (architecture, 4-Part decomposition, atomic prompts)

Council: HOST DJ (operating SPC, per the supplied card) · SPARTAN MVE (invariant design) · SOLVA ULTRA SI (GAUNTLET verdict) · CORDON (wave sequencing) · OSIRIS ULTRA SI (telemetry and production standard) · SAVANT ENVOY ULTRA SI (handoff partner)

Source basis: F10 CONNECTOR ATLAS PDD v3.1 (companion amendment; source of Invariants #32 and #33 and the Chat Script Composer design, adopted unchanged); Hostinger's AI website builder / agentic ('vibe coding') mode documentation ([EXT] , re-verify before use); HOST_DJ_SPC_v1_0 (SPC-H0STDJ-IF-2026-001); ATANDA Command Centre Living PDD and MVE PDD; THE ARK HARNESS ATLAS Omnibus PDD v10.1; OMNIBUS ALPHA; SAVANT

ENVOY ULTRA SI SPC v1.0.0; F9 MACHINE FLOOR ATLAS PDD v2.1;
Camelot Roundtable SPC Inventory; Master SPC Platform Registry.

EVIDENCE TAGS

- **[SPEC]** — D37, all 18 IPs, the four invariants, the run, the capability types, the HRP extensions, the 0–100 HSE normalisation, the two advice modes, the Suitability Check and its blocking classes SC-1, SC-4 to SC-7, the evidence trust rules T1 to T9, the Supplied Source Record, the cheat-sheet and report schemas, **UCG-HOST**, all Part 4 prompts. Design intent; nothing built.
- **[INT]†** — SOLVA verdict self-adjudicated; Tier 0 self-assignment.
- **[Owner requirement]** — the two advice modes and the devolution rule, and the decision to allow outside-registry hosts with user-supplied documents as a lower-trust source, as specified by the Owner.
- **[Owner requirement]** — the instruction to add curated prompt scripts for chat-interface targets, naming Azure, Gemini Agent and Hostinger as examples, as specified by the Owner and jointly implemented across this document and F10 PDD v3.1.
- **[ARK]** — the HOST DJ card's identity, JCSE, lineage, seat, mode, features, registry, journey tiers, constraints, SDF artifacts and sister integrations; the F8-HDJ contract and guardrails; the HRP fields; the HSE criteria and weights; the F8 registry; the Class C deferral; the product-versus-harness scope; OSIRIS's deployment layer and production standard; the register entries for D32, D33, D35 and D36; and the seat and score collisions: drawn from confirmed project artifacts as stated in them.
- **[SYNTH]** — The hosting failure-mode table, the operator adoption ruling, the two-handoff protocol, the capability-type chain, the **UCG-HOST** class and the F11 onboarding checks are original syntheses for this build, not empirically validated.

- [EXT] — The Supabase CLI's description of `db reset --linked` as resetting the linked project with local migrations, seen in a mirror of the CLI's source; the destructive nature of a remote reset is an inference from it. **Re-verify before any use.**