


Barcode Verification Report


142030297			
Date:	9/28/2026	Serial number:	C281
Time:	12:38:07 PM	Aperture:	0.010"
Software Version:	3.1.0.0 (UI)	Wavelength:	2.6E-005" (660 nm.)
	3.1.0.0 (core)	Last Calibrated:	9/25/2026
GS1-128 Content: Pass: (420)30297			
Number of scans: 10			
Code Type: GS1-128 49 bars + spaces. X dim=0.0148" (37%)			
Average Grade (Pass=1.5):		F (0.4) - Fail (0.4/10/660)	
Average Bar Gain (tolerance):		10% (± 33.0%)	
Check Character:		OK (72)	

	Pass Scans	Fail Scans
Structure	1, 4, 6-7, 10	2-3, 5, 8-9
Left quiet zone	1..10	
Right quiet zone	1, 4, 6-7, 10	2-3, 5, 8-9

	Percentage Values	Average Grades
Minimum Reflectance	4%	A (4.0)
Maximum Reflectance	81%	
Threshold	40%	
Symbol Contrast	77%	A (4.0)
Min. Edge Contrast	56%	A (4.0)
Modulation	72%	A (3.8)
Defects	30%	D (0.8)
Decodability	69%	C (2.0)
Decode		C (2.0)

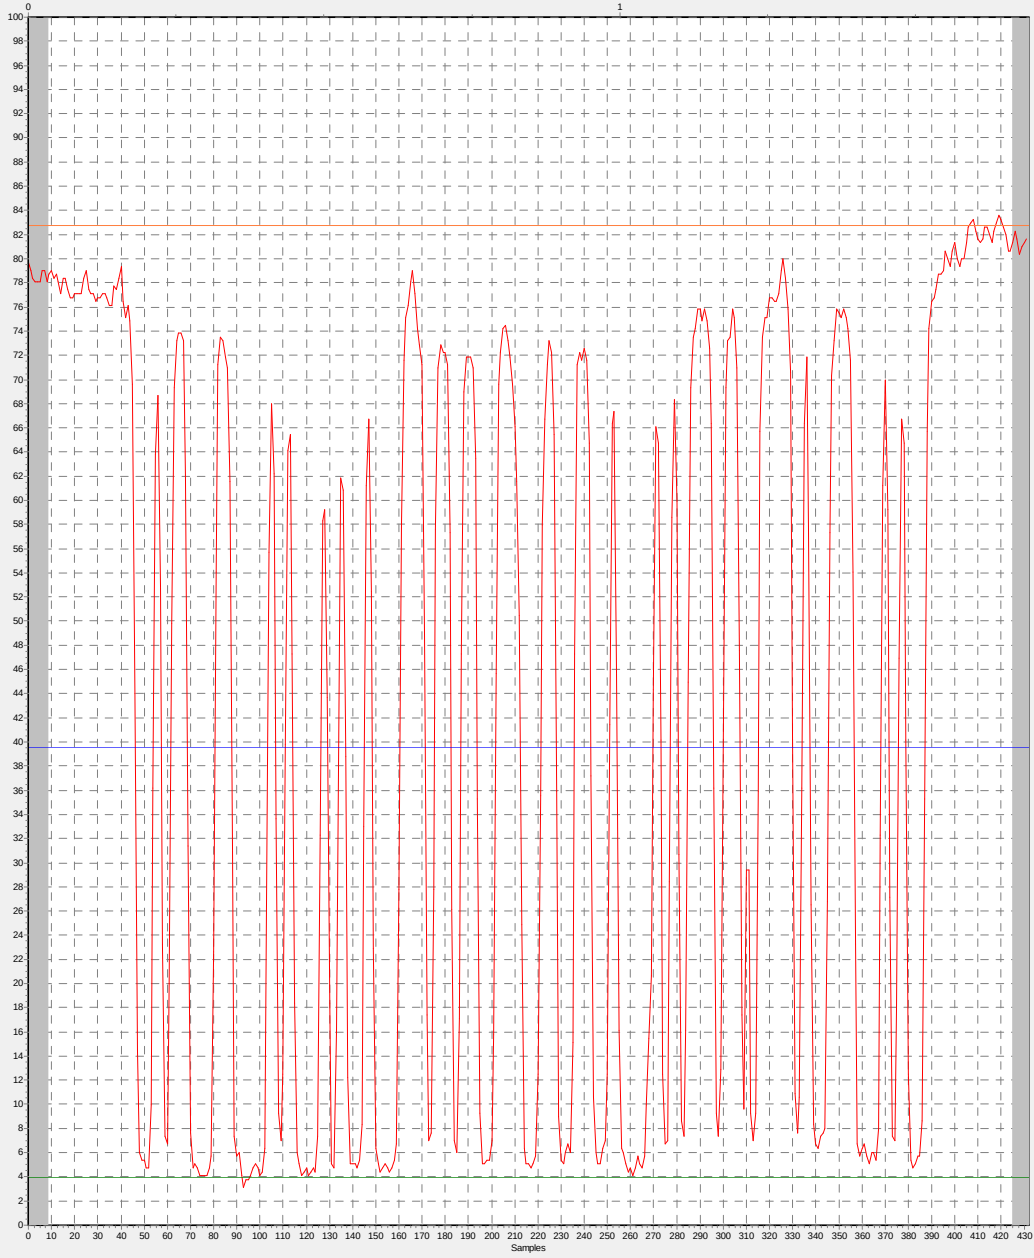

Dimensional Analysis

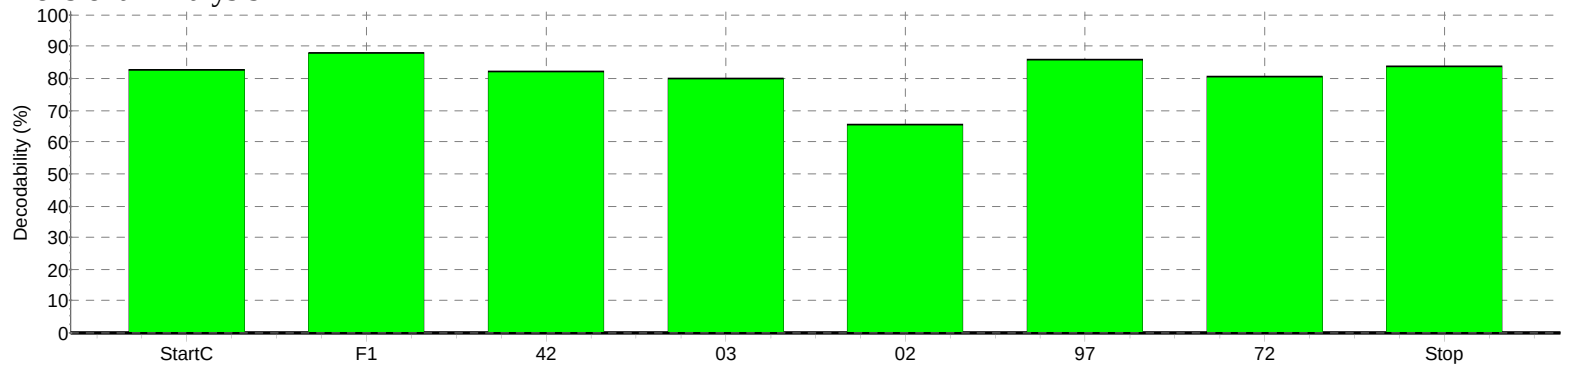

	Decodability	Char. Width	Sum of bars	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge
LM	1802 (1483)								
StartC	82.8%	1631	934 (889)	448 (444)	300 (296)	439 (444)	737 (741)		
F1	88.2%	1631	1217 (1186)	747 (741)	295 (296)	296 (296)	591 (593)		
42	82.3%	1632	936 (889)	302 (296)	449 (444)	444 (444)	601 (593)		
03	80.2%	1613	637 (586)	445 (440)	443 (440)	442 (440)	590 (587)		
02	65.6%	1640	957 (894)	605 (596)	570 (596)	588 (596)	590 (596)		
97	85.8%	1623	922 (885)	735 (737)	300 (294)	298 (294)	296 (294)		
72	80.6%	1634	644 (594)	445 (445)	596 (594)	887 (891)	738 (743)		
Stop	85.7%	1922	1242 (1182)	737 (739)	888 (887)	594 (591)	292 (295)	294 (295)	455 (443)
RM	1710 (1481)								