

Barcode Verification Report


¹00006146110000000047			
Date:	9/28/2026	Serial number:	C281
Time:	12:36:16 PM	Aperture:	0.010"
Software Version:	3.1.0.0 (UI)	Wavelength:	2.6E-005" (660 nm.)
	3.1.0.0 (core)	Last Calibrated:	9/25/2026
GS1-128 Content: Pass: (00)006146110000000047			
Number of scans:		10	
Code Type:	GS1-128 85 bars + spaces. X dim=0.0197" (49%)		
Average Grade (Pass=1.5):		A (3.9) - Pass (3.9/10/660)	
Average Bar Gain (tolerance):		5% (± 33.0%)	
Check Character:		OK (28)	

	Pass Scans	Fail Scans
Structure	1..10	
Left quiet zone	1..10	
Right quiet zone	1..10	

	Percentage Values	Average Grades
Minimum Reflectance	3%	A (4.0)
Maximum Reflectance	79%	
Threshold	39%	
Symbol Contrast	76%	A (4.0)
Min. Edge Contrast	58%	A (4.0)
Modulation	76%	A (3.9)
Defects	7%	A (4.0)
Decodability	82%	A (4.0)
Decode		A (4.0)



Dimensional Analysis

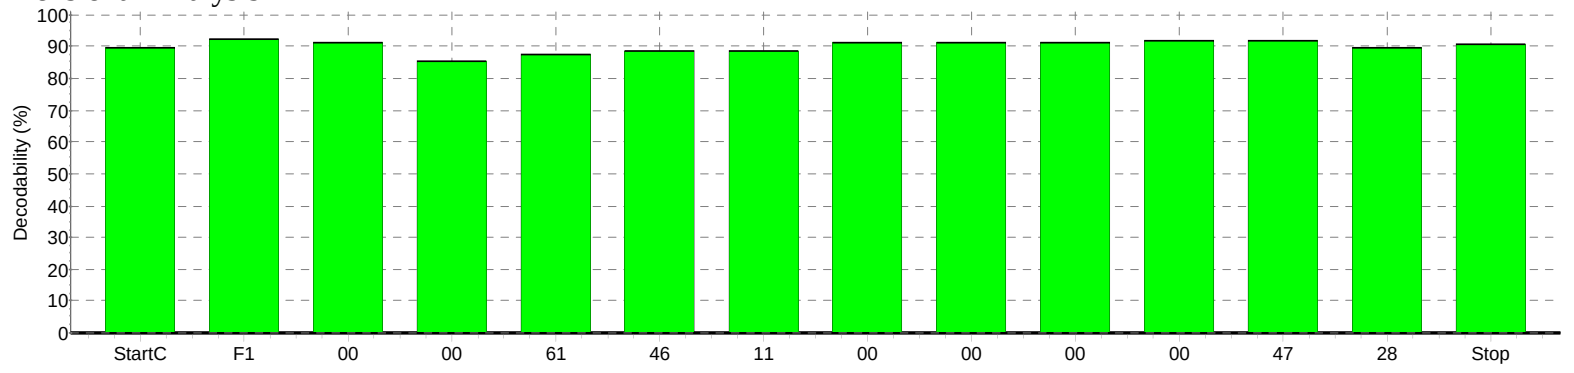

	Decodability	Char. Width	Sum of bars	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge
LM	2376 (1975)								
StartC	89.8%	2190	1228 (1194)	604 (597)	404 (398)	592 (597)	985 (995)		
F1	92.4%	2174	1607 (1580)	985 (987)	396 (394)	399 (394)	788 (790)		
00	91.1%	2165	1211 (1181)	591 (591)	592 (591)	785 (787)	793 (787)		
00	85.3%	2182	1224 (1189)	593 (594)	599 (594)	786 (793)	778 (793)		
61	87.5%	2156	826 (783)	777 (783)	599 (587)	983 (980)	973 (980)		
46	88.9%	2166	1220 (1181)	399 (394)	785 (787)	1176 (1181)	980 (984)		
11	88.9%	2163	824 (786)	980 (983)	787 (786)	589 (589)	587 (589)		
00	91.1%	2172	1215 (1183)	592 (592)	594 (592)	788 (789)	784 (789)		
00	91.3%	2173	1215 (1185)	596 (592)	595 (592)	787 (790)	789 (790)		
00	91.4%	2171	1214 (1183)	592 (592)	593 (592)	789 (789)	791 (789)		
00	92.0%	2175	1214 (1186)	598 (593)	599 (593)	786 (791)	792 (791)		
47	91.9%	2176	1215 (1186)	791 (791)	1182 (1187)	787 (791)	594 (593)		
28	89.9%	2171	1219 (1184)	981 (987)	790 (789)	596 (592)	396 (394)		
Stop	91.2%	2576	1631 (1585)	985 (991)	1183 (1189)	797 (793)	398 (396)	396 (396)	602 (594)
RM	2321 (1978)								