


NET622. FA3. WEEK 6

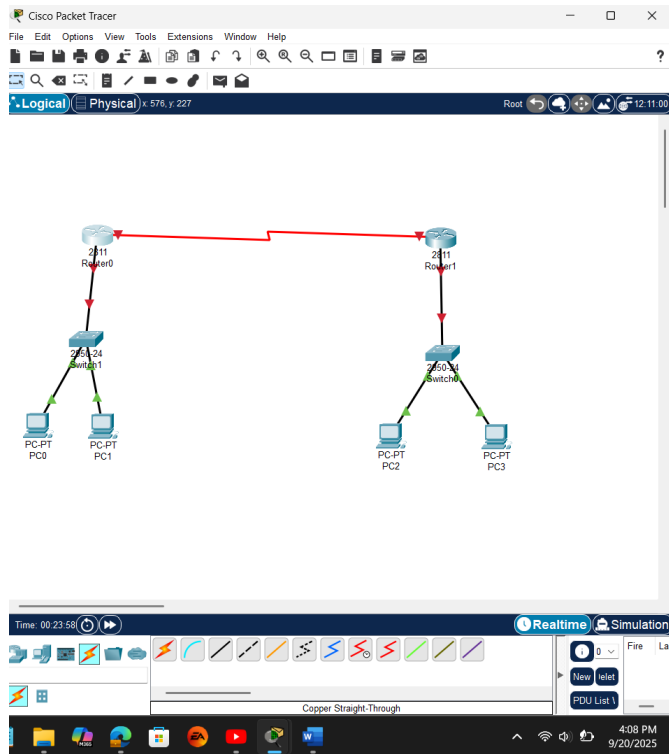

```
Router0
Physical Config CLI Attributes
IOS Command Line Interface



--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]:
Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface s0/2/0
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#clock rate 72000
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial0/2/0, changed state to down
Router(config-if)#interface fastEthernet0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#router ospf 1
Router(config-router)#network 192.168.10.0 0.0.0.255 area 0
Router(config-router)#network 192.168.20.0 0.0.0.255 area 0
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Router#
```

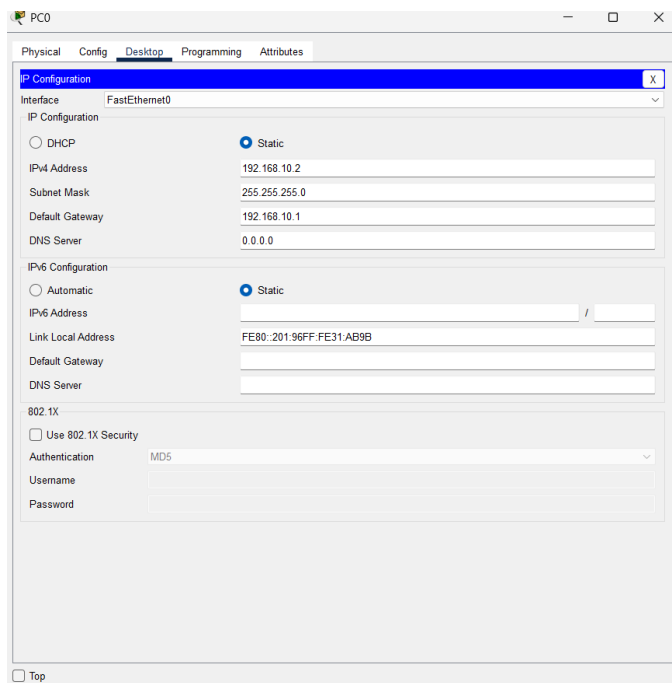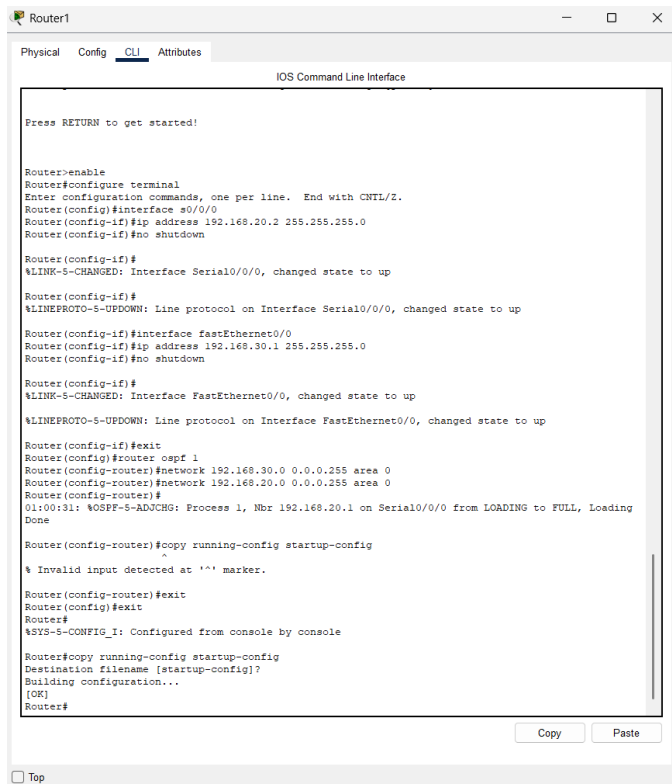

PC1

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IP4 Address 192.168.10.3

Subnet Mask 255.255.255.0

Default Gateway 192.168.10.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::2E0:F7FF:FECC:293

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

PC2

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IP4 Address 192.168.30.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.10.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::20C:CFFF:FE9C:7391

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

PC3

Physical Config Desktop Programming Attributes

P Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.30.3

Subnet Mask 255.255.255.0

Default Gateway 192.168.10.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80::20D:B0FF:FE43:6038

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.30.1

Pinging 192.168.30.1 with 32 bytes of data:

Reply from 192.168.30.1: bytes=32 time=1ms TTL=254
Reply from 192.168.30.1: bytes=32 time=1ms TTL=254
Reply from 192.168.30.1: bytes=32 time=1ms TTL=254
Reply from 192.168.30.1: bytes=32 time=1ms TTL=254

Ping statistics for 192.168.30.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>
```

Top

