


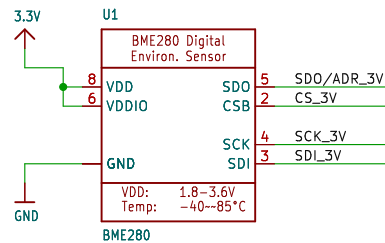



LEVEL SHIFTING (5V <--> 3V)



For SPI set CSB low at startup
SDO=MISO, SDI=MOSI, SCK=SCK, CSB=CS/SSEL
For I2C leave CSB pulled high (default value)
SDI=SDA, SCK=SCL

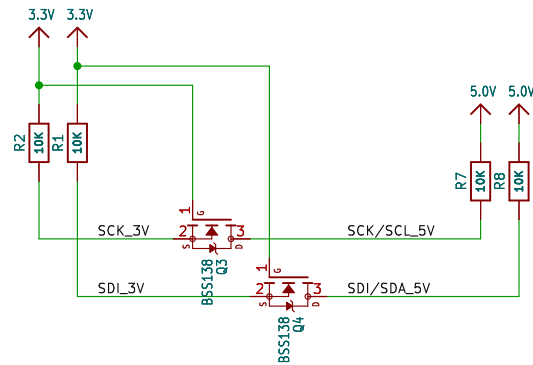

{PROJECTNAME}

{CURRENT_DATE}

Sheet: {#}/{##}

Sheet: User
File: working.kicad_sch

Drawing: {AUTHOR}

Adafruit Industries

Title:

Size: User

Date:

KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Rev:

Id: 1/1