


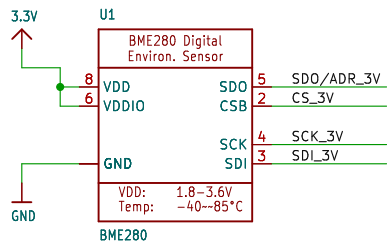



LEVEL SHIFTING (5V <--> 3V)



For SPI set CSB low at startup
 SDO=MISO, SDI=MOSI, SCK=SCK, CSB=CS/SSEL
 For I2C leave CSB pulled high (default value)
 SDI=SDA, SCK=SCL

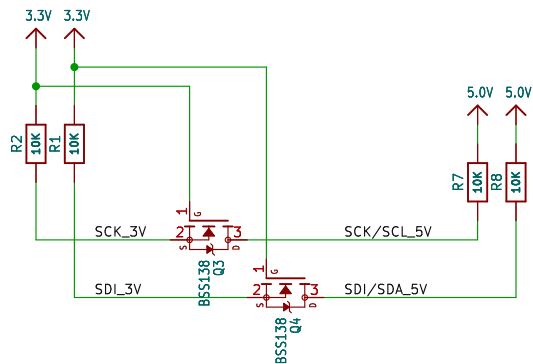

\${PROJECTNAME}

\${CURRENT_DATE}

Sheet: \${#}/\${##}

Drawing: \${AUTHOR}

Adafruit Industries

Sheet: /
 File: working.kicad_sch

Title:

Size: User

Date:

KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Rev:

Id: 1/1