The Journal of Open Source Software

pyOMA2: A Python module for conducting operational modal analysis

Dag P. Pasca [1¶] **and Diego Federico Margoni** [2]

1 Norsk Treteknisk Institutt, Oslo, Norway **2** Politecnico di Torino, Italy ¶ Corresponding author

DOI: 10.xxxxxx/draft

Software

- Review
- Repository
- Archive

Editor:

Submitted: 12 September 2024
Published: unpublished

License
Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License (CC BY 4.0).

DRAFT

Summary

Operational Modal Analysis (OMA) has garnered considerable attention from the engineering community in recent years and has established itself as the preferred method for estimating the modal properties of structures in Structural Health Monitoring (SHM), particularly in civil engineering. The key advantage of OMA over Experimental Modal Analysis (EMA) is its ability to derive modal parameters solely from output measurements taken during the structure's normal operation. This makes OMA a more practical and efficient approach, as opposed to the traditional EMA, which requires both input and output data.

Statement of need

`pyOMA2` is the latest and improved version of the pyOMA module, a Python library specifically designed for conducting operational modal analysis. It fully utilises Python's object-oriented capabilities to offer a comprehensive suite of tools for performing OMA.

The module supports both single and multi-setup data measurements, enabling users to handle multiple acquisitions that combine reference and roving sensors. It is user-friendly and provides a range of tools for pre-processing and visualising data. A key enhancement is the introduction of interactive plots, allowing users to select the desired modes directly from algorithm-generated graphs. Additionally, a new feature enables users to define the geometry of tested structures, facilitating the visualisation of mode shapes.

The following algorithm are included in the module: - Frequency domain decomposition (FDD); - Enhanced frequency domain decomposition (EFDD); - Frequency spatial domain decomposition (FSDD); - Reference based covariance driven stochastic subspace identification (SSIcov); - Reference based data driven stochastic subspace identification (SSIdat); - Poly-reference Least Square Frequency Domain (pLSCF);

For the readers seeking a more comprehensive understanding of the algorithms and the underlying theory, a wealth of literature is available for consultation. Key references include works by Brincker (Brincker, Ventura, et al., 2001; Brincker, Zhang, et al., 2001; Brincker & Ventura, 2015), Zhang (Zhang et al., 2010), Peeters (Peeters et al., 2004; Peeters & De Roeck, 1999), Van Overschee and De Moor (Van Overschee & De Moor, 2012), Reynders (Reynders, 2012), Rainieri and Fabbrocino (Rainieri & Fabbrocino, 2014), Amador (Amador & Brincker, 2021), Döhler (Döhler, 2011, pp. dohler2013efficient, dohler2013uncertainty), and others.

The module's reliability and applicability for research purposes have been demonstrated by the authors through various studies, such as (Alaggio et al., 2021; Aloisio et al., 2020; Simoncelli et al., 2023). Additionally, the module has gained traction within the research community, as evidenced by its use in studies by (Abuodeh et al., 2023; Croce et al., 2023; Saharan et al., 2023; Talebi et al., 2023), and others.

Module's structure.

The module is structured into three primary levels: 1. At the first level are the `setup` classes. Users instantiate these classes by providing a data array and the sampling frequency for a single setup scenario, or a list of data arrays and their respective sampling frequencies, and reference indices, for a multi-setup scenario. 2. The second level comprises the `algorithms` classes. Users can instantiate the algorithms they wish to run and then add them to the setup class. 3. The third level contains the `support` classes, which serve as auxiliary components to the first two levels. This level includes various specialized classes: * `result` classes, where outcomes are stored. * `geometry` classes, for storing geometric data. * `run_param` classes, where parameters used for running the algorithms are kept. * Dedicated classes for animating mode shapes and interacting with plots generated by the algorithm classes.

In addition to the levels depicted in the figure, there is a further level not shown, comprised of the set of functions internally called by the class methods. Many of these functions represent an updated version of those available in our previous release, `pyOMA`.

DRAFT

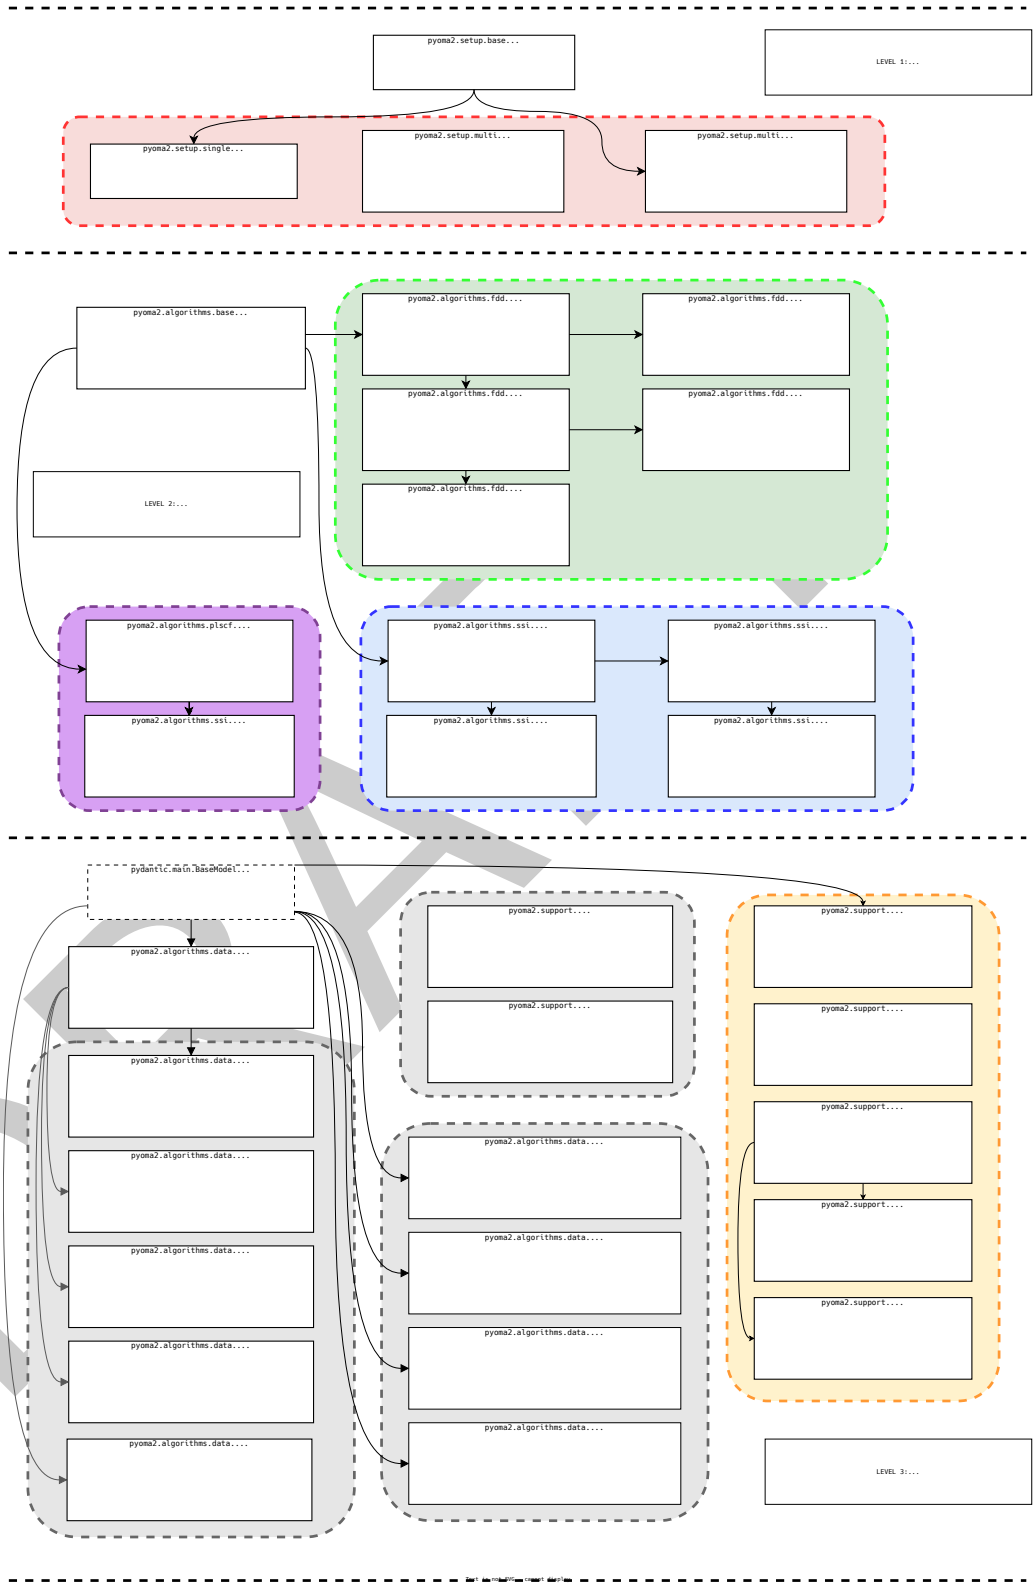

Figure 1: Schematic organisation of the module showing inheritance between classes

Documentation

A comprehensive documentation for `pyOMA2`, including examples, is available at https://pyoma.readthedocs.io/en/main/.

Acknowledgements

We acknowledge contributions from Angelo Aloisio and Marco Martino Rosso.

References

Abuodeh, O., Locke, W., Redmond, L., Sreenivasulu, R. V., & Schmid, M. (2023). Examining methods for modeling road surface roughness effects in vehicle–bridge interaction models via physical testing. *Society for Experimental Mechanics Annual Conference and Exposition*, 33–47.

Alaggio, R., Aloisio, A., Antonacci, E., & Cirella, R. (2021). Two-years static and dynamic monitoring of the santa maria di collemaggio basilica. *Construction and Building Materials*, *268*, 121069.

Aloisio, A., Pasca, D., Tomasi, R., & Fragiacomo, M. (2020). Dynamic identification and model updating of an eight-storey CLT building. *Engineering Structures*, *213*, 110593.

Amador, S. D., & Brincker, R. (2021). Robust multi-dataset identification with frequency domain decomposition. *Journal of Sound and Vibration*, *508*, 116207.

Brincker, R., & Ventura, C. (2015). *Introduction to operational modal analysis*. John Wiley & Sons.

Brincker, R., Ventura, C. E., & Andersen, P. (2001). Damping estimation by frequency domain decomposition. *Proceedings of IMAC 19: A Conference on Structural Dynamics: Februar 5-8, 2001, Hyatt Orlando, Kissimmee, Florida, 2001*, 698–703.

Brincker, R., Zhang, L., & Andersen, P. (2001). Modal identification of output-only systems using frequency domain decomposition. *Smart Materials and Structures*, *10*(3), 441.

Croce, T., Girardi, M., Gurioli, G., Padovani, C., & Pellegrini, D. (2023). Towards a cloud-based platform for structural health monitoring: Implementation and numerical issues. *International Conference on Experimental Vibration Analysis for Civil Engineering Structures*, 610–619.

Döhler, M. (2011). *Subspace-based system identification and fault detection: Algorithms for large systems and application to structural vibration analysis* [PhD thesis]. Université Rennes 1.

Peeters, B., & De Roeck, G. (1999). Reference-based stochastic subspace identification for output-only modal analysis. *Mechanical Systems and Signal Processing*, *13*(6), 855–878.

Peeters, B., Van der Auweraer, H., Guillaume, P., & Leuridan, J. (2004). The PolyMAX frequency-domain method: A new standard for modal parameter estimation? *Shock and Vibration*, *11*(3-4), 395–409.

Rainieri, C., & Fabbrocino, G. (2014). Operational modal analysis of civil engineering structures. *Springer, New York*, *142*, 143.

Reynders, E. (2012). System identification methods for (operational) modal analysis: Review and comparison. *Archives of Computational Methods in Engineering*, *19*, 51–124.

Saharan, N., Kumar, P., & Pal, J. (2023). Convolutional neural network–based structural health monitoring framework for wind turbine blade. *Journal of Vibration and Control*,

DRAFT

10775463231213423.

Simoncelli, M., Aloisio, A., Zucca, M., Venturi, G., & Alaggio, R. (2023). Intensity and location of corrosion on the reliability of a steel bridge. *Journal of Constructional Steel Research*, *206*, 107937.

Talebi, A., Potenza, F., & Gattulli, V. (2023). Interoperability between BIM and FEM for vibration-based model updating of a pedestrian bridge. *Structures*, *53*, 1092–1107.

Van Overschee, P., & De Moor, B. (2012). *Subspace identification for linear systems: Theory—implementation—applications*. Springer Science & Business Media.

Zhang, L., Wang, T., & Tamura, Y. (2010). A frequency–spatial domain decomposition (FSDD) method for operational modal analysis. *Mechanical Systems and Signal Processing*, *24*(5), 1227–1239.

DRAFT