ORATORY1990

EQ setting for Test 2

SPL Frequency Response without EQ

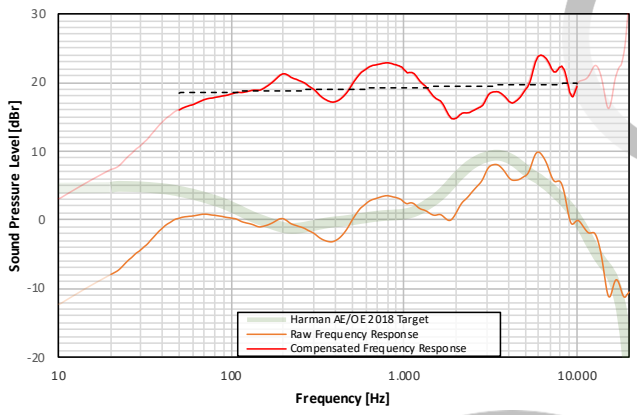

SPL Frequency Response with EQ

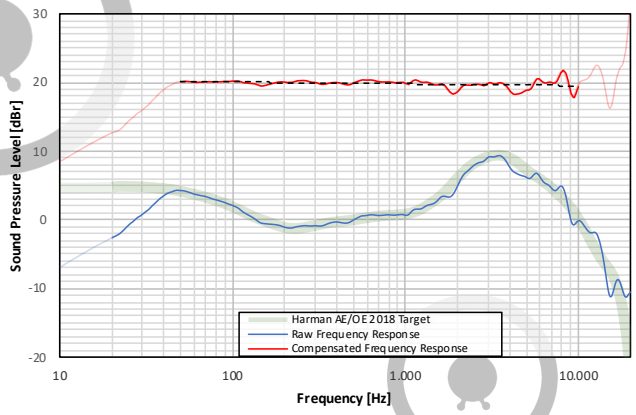

EQ Curve Individual Filters

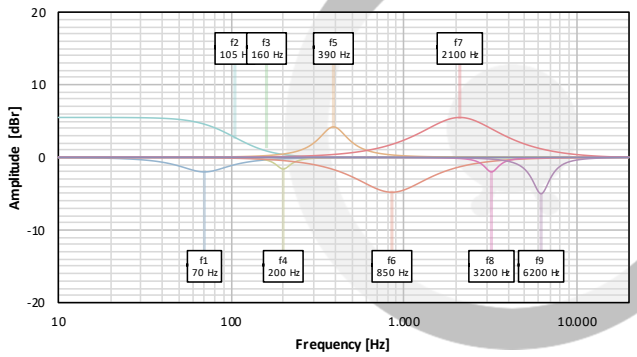

EQ Curve total

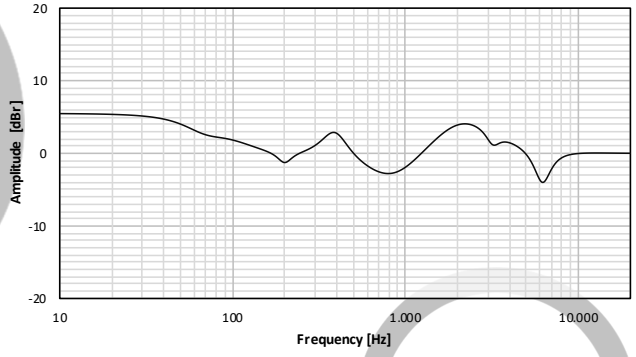

Error Curve Histogram without EQ

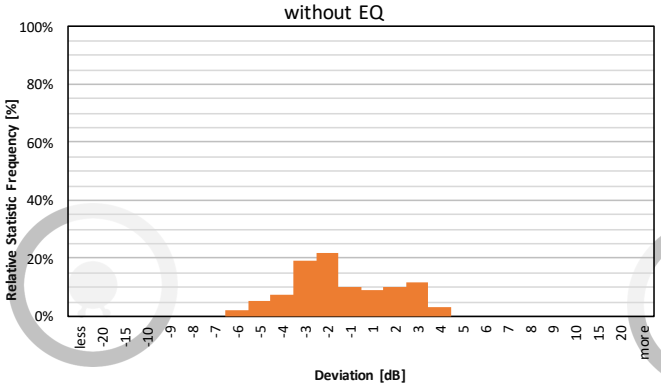

Error Curve Histogram with EQ

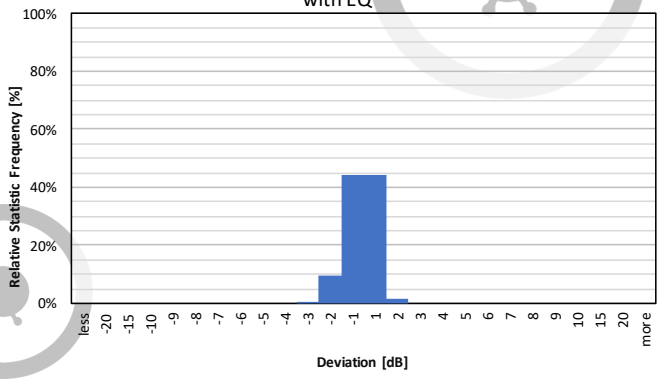

Filter Settings	Filter Type	Frequency	Gain	Q-Factor	BW
Band 1	PEAK	70 Hz	-2,0 dB	1,2	1,17
Band 2	LOW_SHELF	105 Hz	5,5 dB	0,71	1,89
Band 3					
Band 4	PEAK	200 Hz	-1,6 dB	4,0	0,36
Band 5	PEAK	390 Hz	4,2 dB	2,0	0,71
Band 6	PEAK	850 Hz	-4,8 dB	0,8	1,7
Band 7	PEAK	2100 Hz	5,5 dB	0,7	1,92
Band 8	PEAK	3200 Hz	-2,0 dB	4,0	0,36
Band 9	PEAK	6200 Hz	-5,0 dB	3,0	0,48
Band 10					

Preamp gain:
-5,5 dB

Deviation from Target	
Before EQ	After EQ
2,17 dB	0,35 dB

Preference Rating*	
Before EQ	After EQ
82/100	100/100

*preference rating prediction based on:

[1] S. Olive et al: "A Statistical Model That Predicts Listeners' Preference Ratings of In-Ear Headphones: Part 1" (2017)
[2] S. Olive et al: "A Statistical Model That Predicts Listeners' Preference Ratings of In-Ear Headphones: Part 2" (2017)
[3] S. Olive et al: "A Statistical Model That Predicts Listeners' Preference Ratings of Around-Ear and On-Ear Headphones" (2018)

The normalized preference ratings are used, where zero deviation from target equals a preference rating of 100

measured on GRAS45BC-10 KEMAR
GRAS KB5000/5001 anthropometric pinnae
APx515 or APx526 Signal Generator/Analyzer
APx1701 amplifier

v2.9
by oratory1990
08.04.24