



f' = 50.00 mm

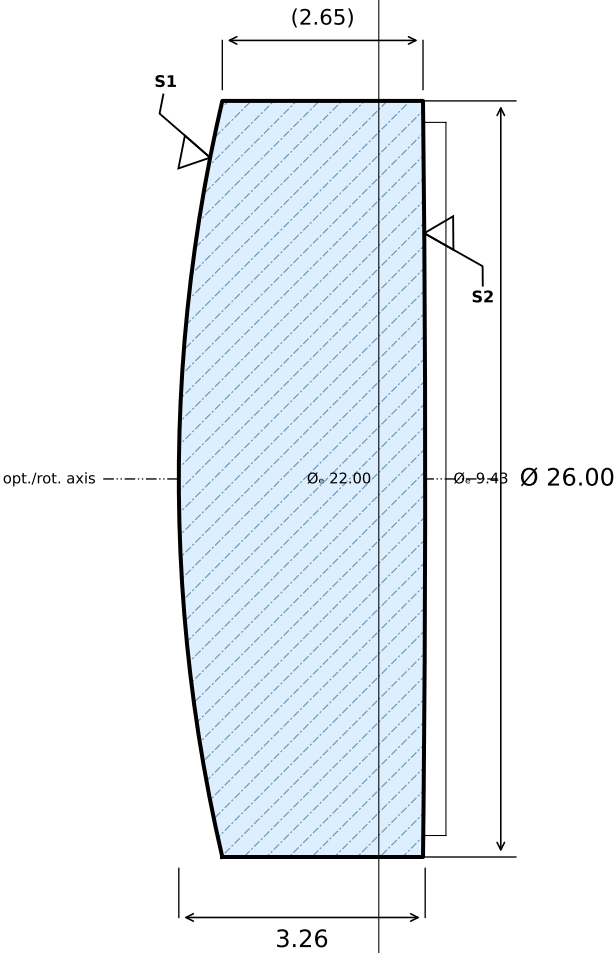


Ang. nach ISO 10110; λ = 546.07 nm

SURFACE 1 (FRONT)		MATERIAL		SURFACE 2 (REAR)		
R +22.014 CX Øe 22.00 3/ (0.5); λ=546.1 nm 4/ 0.5' 5/ 2×0.04 6/ — ⊙ 7/ AR 400-700 nm 13/ —		SK16 $n_d = 1.6204$ (587.6 nm) $\nu_d = 60.28$ (587.6 nm) 0/ 10 nm/cm 1/ 1×0.16 2/ NH040; 2		R -435.760 CX Øe 9.43 3/ (1); λ=546.1 nm 4/ 1' 5/ 2×0.063 6/ — ⊙ 7/ — 13/ —		
Optiland / CookeTriplet CT-001 ORGANISATION / PROJECT / PART NO.		B. Lutzer DRAWN BY	K. Harrison APPROVED	2026-04-01 DATE	10:1 SCALE	1 / 3 SHEET
A REV		NOTES		DIM. IN mm GENERAL TOL. PER ISO 10110-11 Ø±0.10 CT±0.15 3/ 5 4/ 3' 5/ 2×0.063		




f' = 50.00 mm

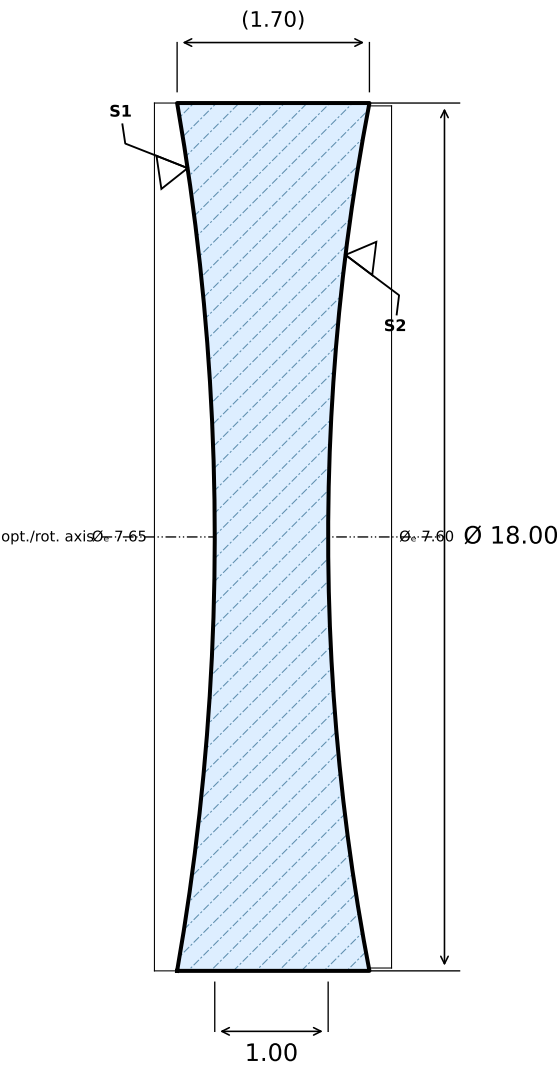

Ang. nach ISO 10110; $\lambda = 546.07\text{ nm}$

SURFACE 1 (FRONT)		MATERIAL		SURFACE 2 (REAR)			
R -22.213 CC		F2 (schott)		R +20.292 CC			
Ø _e 7.65		n _d = 1.6200 (587.6 nm)		Ø _e 7.60			
3/ (0.5); λ=546.1 nm		ν _d = 36.37 (587.6 nm)		3/ (0.5); λ=546.1 nm			
4/ 0.5'		0/ 10 nm/cm		4/ 0.5'			
5/ 2×0.04		1/ 1×0.16		5/ 2×0.04			
6/ —		2/ NH040; 2		6/ —			
Ⓐ 7/ AR 400-700 nm				Ⓐ 7/ AR 400-700 nm			
13/ —				13/ —			
Optiland / CookeTriplet CT-002		B. Lutzer	K. Harrison	2026-04-01	15:1	2 / 3	A
ORGANISATION / PROJECT / PART NO.		DRAWN BY	APPROVED	DATE	SCALE	SHEET	REV
NOTES				DIM. IN mm GENERAL TOL. PER ISO 10110-11 Ø±0.10 CT±0.15 3/ 5 4/ 3' 5/ 2×0.063			
							

f' = 50.00 mm

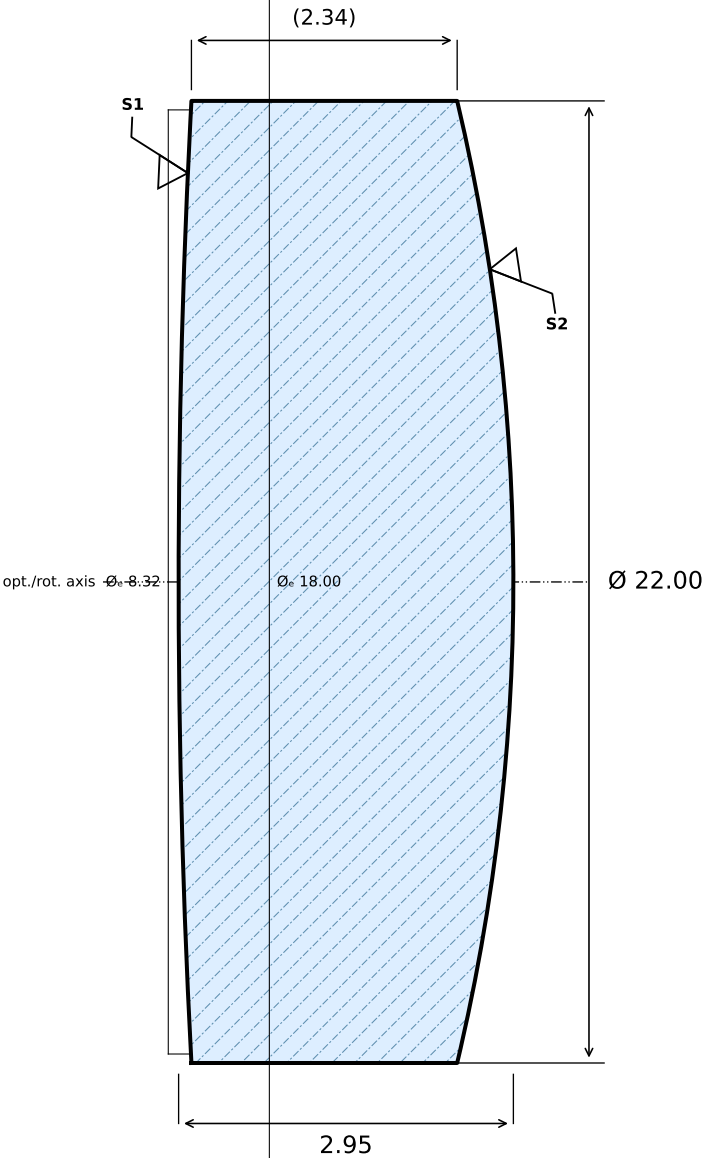

Ang. nach ISO 10110; $\lambda = 546.07 \text{ nm}$

SURFACE 1 (FRONT)		MATERIAL		SURFACE 2 (REAR)		
R +79.684 CX Ø 8.32 3/ (1); $\lambda=546.1 \text{ nm}$ 4/ 1' 5/ 2×0.063 6/ — ⌀ 7/ — 13/ —		SK16 $n_d = 1.6204 \text{ (587.6 nm)}$ $v_d = 60.28 \text{ (587.6 nm)}$ 0/ 10 nm/cm 1/ 1×0.16 2/ NH040; 2		R -18.395 CX Ø 18.00 3/ (0.5); $\lambda=546.1 \text{ nm}$ 4/ 0.5' 5/ 2×0.04 6/ — ⌀ 7/ AR 400-700 nm 13/ —		
Optiland / CookeTriplet CT-003 ORGANISATION / PROJECT / PART NO.		B. Lutzer DRAWN BY	K. Harrison APPROVED	2026-04-01 DATE	15:1 SCALE	3 / 3 SHEET
NOTES				DIM. IN mm GENERAL TOL. PER ISO 10110-11 Ø±0.10 CT±0.15 3/ 5 4/ 3' 5/ 2×0.063		

