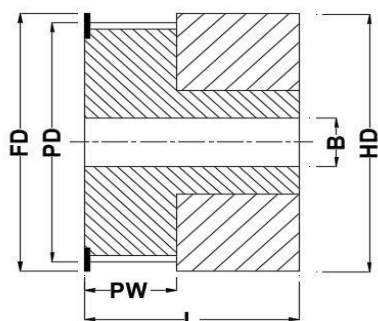




MICRO TECH (INDIA) ENGINEERING

WEBSITE:-

E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626

**3M-06****TYPE - 0F****TYPE - 2F****TYPE - 2****3M Pitch (HTD) Timing pulley**

Suitable for Belt Width 06mm

Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pitch Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
10-3M-06	10	0F	ALU	9.55	13.0	7.2	13.0	14.5	4
12-3M-06	12	0F	ALU	11.46	15.0	7.2	15.0	14.5	4
14-3M-06	14	0F	ALU	13.37	16.0	7.2	16.0	14.5	4
15-3M-06	15	0F	ALU	14.32	17.5	7.2	17.5	14.5	5
16-3M-06	16	2F	ALU	15.28	18.0	9.8	10.0	17.5	5
18-3M-06	18	2F	ALU	17.19	19.5	9.8	11.0	17.5	6
20-3M-06	20	2F	ALU	19.10	23.0	9.8	13.0	17.5	6
21-3M-06	21	2F	ALU	20.05	25.0	9.8	14.0	17.5	6
22-3M-06	22	2F	ALU	21.01	25.0	9.8	14.0	17.5	6
24-3M-06	24	2F	ALU	22.92	25.0	9.8	14.0	17.5	6
26-3M-06	26	2F	ALU	24.83	28.0	9.8	16.0	17.5	6
28-3M-06	28	2F	ALU	26.74	32.0	9.8	18.0	17.5	6
30-3M-06	30	2F	ALU	28.65	32.0	9.8	20.0	17.5	6
32-3M-06	32	2F	ALU	30.56	36.0	9.8	22.0	17.5	6
36-3M-06	36	2F	ALU	34.38	38.0	10.3	26.0	18.0	6
40-3M-06	40	2F	ALU	38.20	42.0	10.3	28.0	18.0	6
44-3M-06	44	2F	ALU	42.02	48.0	10.3	33.0	18.0	8
48-3M-06	48	2	ALU	45.84		10.3	33.0	18.6	8
60-3M-06	60	2	ALU	57.30		10.3	33.0	18.6	8
72-3M-06	72	2	ALU	68.75		10.3	33.0	18.6	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING


WEBSITE:-

E-MAIL:- microtech77@yahoo.com


MOBILE:- +91 9825869626




3M-09

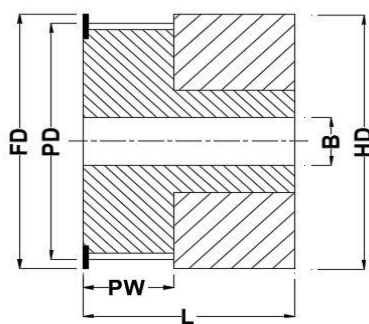

TYPE - 0F



TYPE - 2F



TYPE - 2

3M Pitch (HTD) Timing pulley

Suitable for Belt Width 09mm

Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
10-3M-09	10	0F	ALU	9.55	13.0	10.2	13.0	17.5	4
12-3M-09	12	0F	ALU	11.46	15.0	10.2	15.0	17.5	4
14-3M-09	14	0F	ALU	13.37	16.0	10.2	16.0	17.5	4
15-3M-09	15	0F	ALU	14.32	17.5	10.2	17.5	17.5	5
16-3M-09	16	2F	ALU	15.28	18.0	12.8	10.0	20.6	5
18-3M-09	18	2F	ALU	17.19	19.5	12.8	11.0	20.6	6
20-3M-09	20	2F	ALU	19.10	23.0	12.8	13.0	20.6	6
21-3M-09	21	2F	ALU	20.05	25.0	12.8	14.0	20.6	6
22-3M-09	22	2F	ALU	21.01	25.0	12.8	14.0	20.6	6
24-3M-09	24	2F	ALU	22.92	25.0	12.8	14.0	20.6	6
26-3M-09	26	2F	ALU	24.83	28.0	12.8	16.0	20.6	6
28-3M-09	28	2F	ALU	26.74	32.0	12.8	18.0	20.6	6
30-3M-09	30	2F	ALU	28.65	32.0	12.8	20.0	20.6	6
32-3M-09	32	2F	ALU	30.56	36.0	12.8	22.0	20.6	6
36-3M-09	36	2F	ALU	34.38	38.0	13.4	26.0	22.2	6
40-3M-09	40	2F	ALU	38.20	42.0	13.4	28.0	22.2	6
44-3M-09	44	2F	ALU	42.02	48.0	13.4	33.0	22.2	8
48-3M-09	48	2	ALU	45.84		13.4	33.0	22.2	8
60-3M-09	60	2	ALU	57.30		13.4	33.0	22.2	8
72-3M-09	72	2	ALU	68.75		13.4	33.0	22.2	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING


WEBSITE:-

E-MAIL:- microtech77@yahoo.com


MOBILE:- +91 9825869626




3M-15

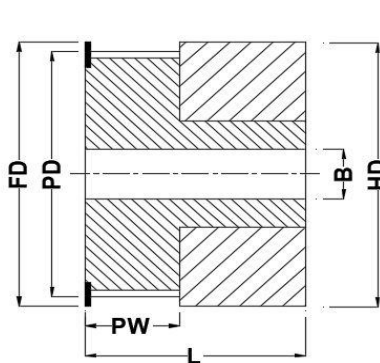

TYPE - 0F

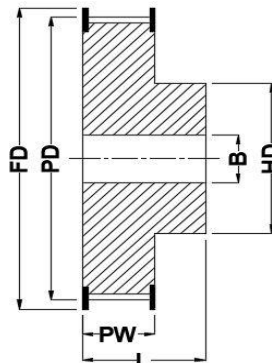

TYPE - 2F

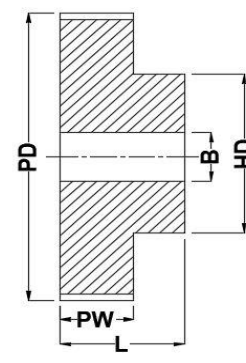

TYPE - 2

3M Pitch (HTD) Timing pulley

Suitable for Belt Width 15mm

Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
10-3M-15	10	0F	ALU	9.55	13.0	17.0	13.0	26.0	4
12-3M-15	12	0F	ALU	11.46	15.0	17.0	15.0	26.0	4
14-3M-15	14	0F	ALU	13.37	16.0	17.0	16.0	26.0	4
15-3M-15	15	0F	ALU	14.32	17.5	17.0	17.5	26.0	5
16-3M-15	16	2F	ALU	15.28	18.0	19.5	10.0	26.0	5
18-3M-15	18	2F	ALU	17.19	19.5	19.5	11.0	26.0	6
20-3M-15	20	2F	ALU	19.10	23.0	19.5	13.0	26.0	6
21-3M-15	21	2F	ALU	20.05	25.0	19.5	14.0	26.0	6
22-3M-15	22	2F	ALU	21.01	25.0	19.5	14.0	26.0	6
24-3M-15	24	2F	ALU	22.92	25.0	19.5	14.0	26.0	6
26-3M-15	26	2F	ALU	24.83	28.0	19.5	16.0	26.0	6
28-3M-15	28	2F	ALU	26.74	32.0	19.5	18.0	26.0	6
30-3M-15	30	2F	ALU	28.65	32.0	19.5	20.0	26.0	6
32-3M-15	32	2F	ALU	30.56	36.0	19.5	22.0	26.0	6
36-3M-15	36	2F	ALU	34.38	38.0	20.0	26.0	30.0	6
40-3M-15	40	2F	ALU	38.20	42.0	20.0	28.0	30.0	6
44-3M-15	44	2F	ALU	42.02	48.0	20.0	33.0	30.0	8
48-3M-15	48	2	ALU	45.84		20.0	33.0	30.0	8
60-3M-15	60	2	ALU	57.30		20.0	33.0	30.0	8
72-3M-15	72	2	ALU	68.75		20.0	33.0	30.0	8