
Chip Multilayer Ceramic Capacitor

Electrical Characteristics Data

Murata Global Part No.	Chip Size Code (mm/inch)	Temp. Chara.	Cap.Value	Cap.Tol	Rated Volt.	Durability (%Rated Volt.)
GRJ155R60J106ME11	1005M/0402	X5R	10μF	±20%	6.3Vdc	100%

*Volt. & temp. derating recommended product

1. Dimension

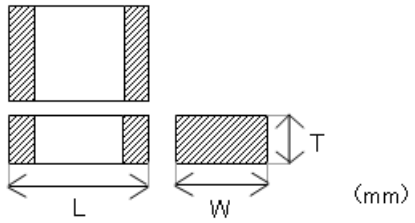


L	W	T
1±0.2	0.5±0.2	0.5±0.2

2. Capacitance, D.F. and I.R.

	Specifications	Measuring condition
Capacitance	8μF to 12μF	1kHz / 0.5Vrms
D.F.	0.1(max.)	1kHz / 0.5Vrms
I.R.	5 Mohm(min.)	6.3V, 60s


3. Impedance/ESR-Frequency

Equipment:Impedance/Network Analyzer

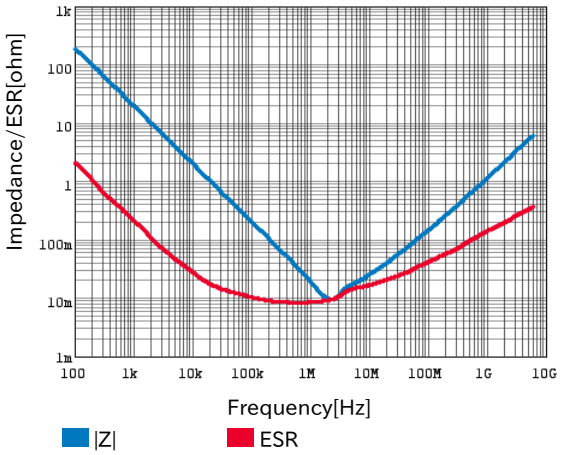


4. Capacitance-DC Bias Characteristics

1kHz / 0.5Vrms Equipment:LCR Meter

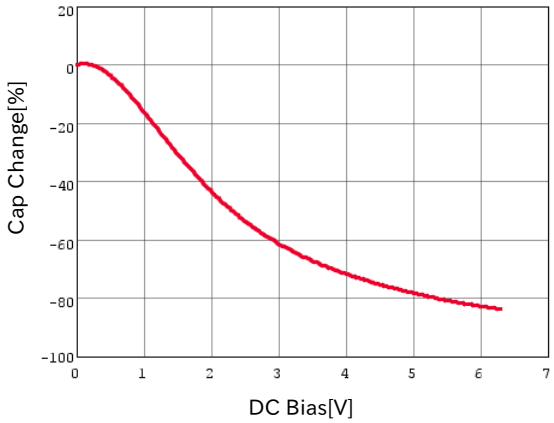


5. Capacitance-AC Voltage Characteristics

1kHz Equipment:LCR Meter

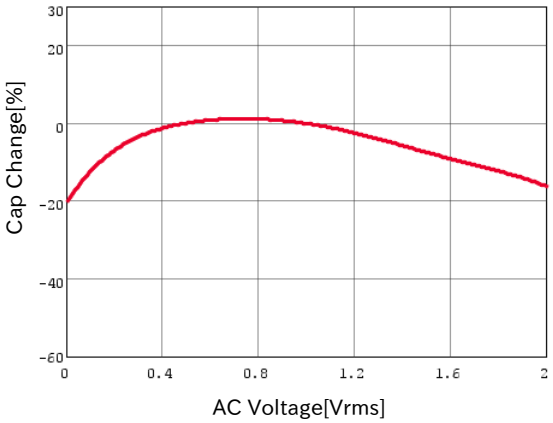


6. Capacitance-Temp. Characteristics

1kHz / 0.1Vrms Equipment:LCR Meter

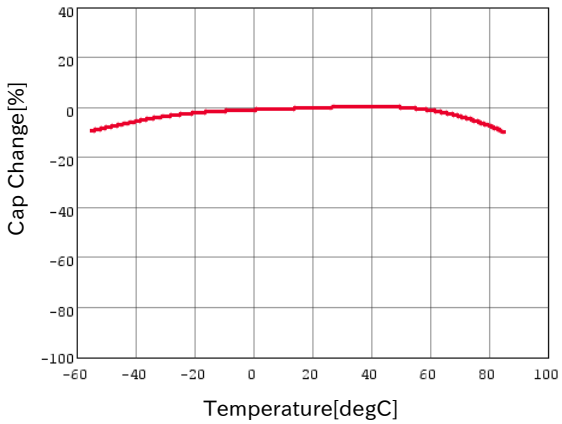

7. Temperature Rise-Ripple Current

Equipment:Temperature Rise - Ripple Current Measurement system

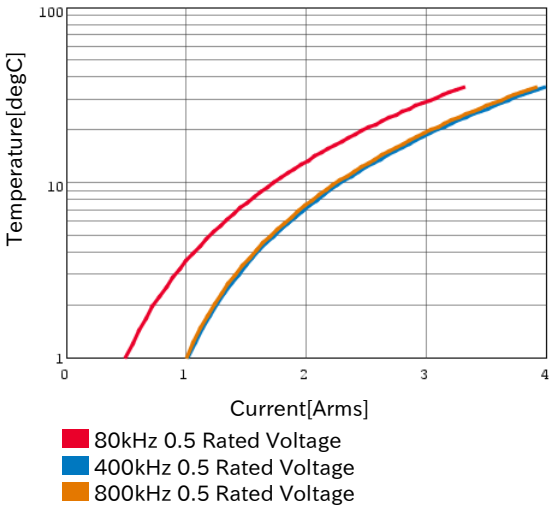

This PDF has only typical specifications.
Therefore, please approve our product specification
before ordering. Product specifications in this PDF are as of Nov. 2026.
They are subject to change or our products in it may be discontinued without advance notice.

Click here to visit Murata WEB site.