


ENTRANCE THRESHOLD MARKER

Honed marble tile 450 × 600 × 20 (portrait) · carved wordmark · gilded dot · inset QR



GENERAL NOTES

- Artwork: carve from the supplied logotype vector (the logo file) — never re-set in the font.
- Lettering: hand-carved V-incision preferred (CNC acceptable); letters left bare.
- Lighting: warm 2700–3000K grazing from one side; a tight glint on the dot. Never cool / blue.
- Fixing: full-bed adhesive + concealed 316 pins sized to the 20 thick tile; verify substrate.
- Setting-out: tile top ≈ 1630–1650 AFL → wordmark centre ≈ 1480–1500; QR centre ≈ 1140–1160.
- Sign-off: cut a stone sample (two letters + gilded dot) and scan-test the QR in sun and dusk.

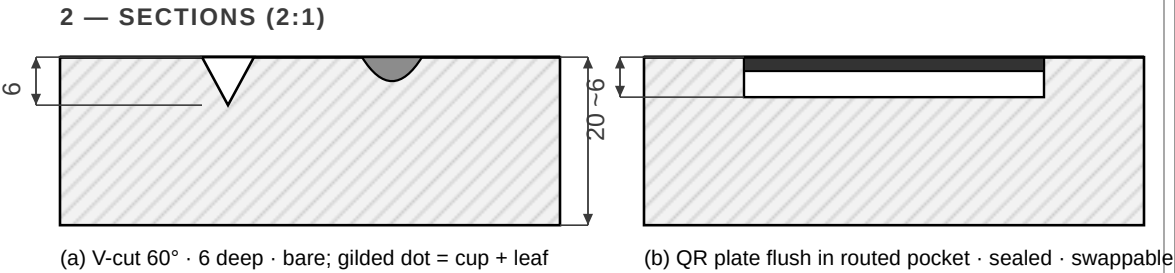

3 — QR SPECIFICATION

	Links to	aethon.house · verified scannable
	Error corr.	Level H (30%) — survives weather / grime
	Centre	AETHON 'A' · ≤ 20% of area
	Code / tile	≥ 90 code · 132 tile · quiet zone ≥ 4 modules
	Finish	matte, dark-on-pale, anti-glare — never gloss
	Execution	porcelain-enamel OR etched 316 stainless, flush

KEYNOTES

- 1 Carved wordmark
from the logotype FILE (brand vector) — never typeset · V-cut · bare · cap 52
- 2 Gild this dot only
23.5ct gold leaf — the single gold accent
- 3 Engraved URL
'aethon.house' — permanent (a link never ages)
- 4 Inset QR plate
see panel 3 · matte · replaceable
- 5 Honed marble tile
450 × 600 × 20 portrait · matte · sealed · shelter from spray
- 6 Clear space
≥ 2X around the lock-up (1X = gold-dot diameter)

AETHON · HOUSE OF LIGHT		PAPHOS, CYPRUS
AETHON · ENTRANCE PLATE		SCALE — DO NOT SCALE figured dims (mm) govern
Sheet 1 of 2 · ENTRANCE THRESHOLD MARKER		STATUS — design study for fabrication · verify on site
MATERIALS / FINISH		DATE 2026-07 REV C · entrance plate 450 × 600 portrait · monochrome · no
□ Honed marble — tile 450 × 600 × 20		
■ 23.5ct gold leaf — dot only		
■ Enamel / etched 316 stainless — QR tile		
■ V-cut incision — bare letters		