


CS-202 DRIVESHAFT
1045 CD 20 h7, QTY 1, 992 g (INVENTOR)
SCALE 1:2 ENVELOPE 411.0 x 20.0 x 20.0 MM
OVERALL 411; DIA 20 h7 (21 FROM THE COUPLING END = 15 h7); 1 MM SET-SCREW FLAT x 21; ENDS 0.5 X 45

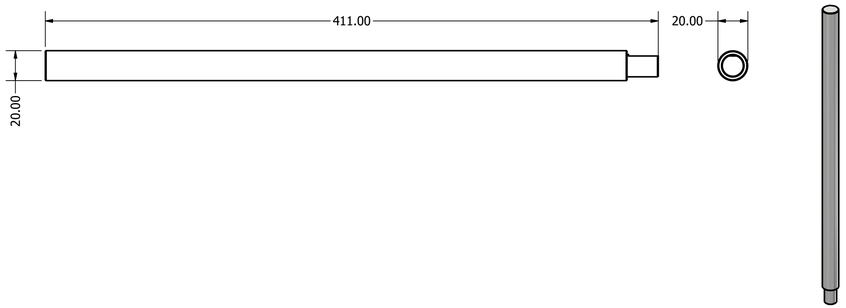

CS-203 TAILSHAFT
1045 CD 20 h7, QTY 1, 964 g (INVENTOR)
SCALE 1:2 ENVELOPE 390.0 x 20.0 x 20.0 MM
OVERALL 390; DIA 20 h7; ENDS 0.5 X 45

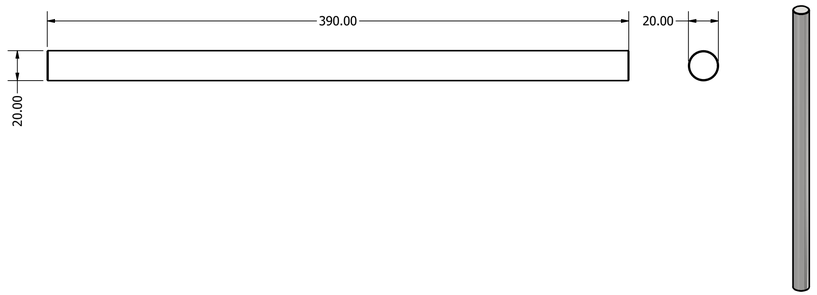

CS-201 PULLEY60X210
6061-T6, QTY 2, 587 g (INVENTOR)
SCALE 1:1.5 ENVELOPE 210.0 x 60.0 x 60.0 MM
OD 60 CROWN, 59.6 AT THE EDGES (0.2/SIDE), FLAT 70; FACE 210; BORE 20 H7 IN 12 MM HUBS; 2 X M6 SET SCREWS

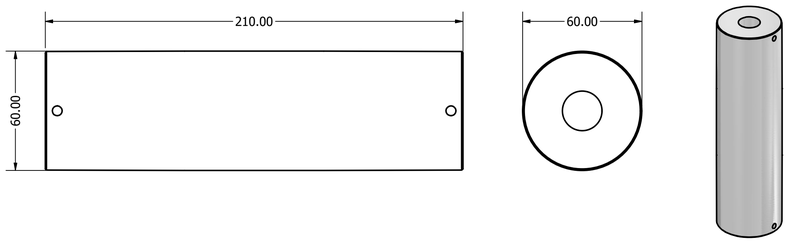

NOTES:
1. 6061-T6 / 1045: MACHINE, BREAK SHARP EDGES 0.5. SHAFTS 1045 CD GROUND 20 h7 (15 h7 COUPLING END). PULLEY BORE 20 H7.
2. 5052-H32 / 6061-T6 SHEET: LASER CUT, DEBURR; CHUTE BENT ON A PRESS BRAKE (INSIDE R = 1.5). PTFE TAPE ON THE PADDLE ITEM FACE.
3. 3D PRINTED: PETG 3 WALLS 25 % GYROID; PA6-CF (DIVERTER HUB + SERVO MOUNT) 4 WALLS 40 % GYROID, DRY 80 C / 8 H. M3/M4 HEAT-SET INSERTS.
4. UNTOLERANCED DIMS +/-0.2 MM (MACHINED), +/-0.3 MM (LASER CUT), +/-0.3 MM (PRINTED). THREADS COSMETIC.
5. ALL DIMENSIONS MM. MACHINE COORDINATES (X BELT TRAVEL, Y LEFT, Z UP). SOURCE: _build/design.py + build_parts.py.


DRAWN	Jay Patel	10/28/2026
CHECKED		
QA		
MFG		
APPROVED		

TITLE: ConveyorSorter - part manufacturing drawings


SIZE D | DWG NO CS-DWG-100 | REV

SCALE 1 / 2 | SHEET 1 OF 4


CS-131 HEADPLATE
6061-T6 6 MM, QTY 2, 339 g (INVENTOR)
SCALE 1:1.5 ENVELOPE 165.0 x 134.0 x 6.0 MM
UCFL204 SEAT: 26 BORE + 2 X 11 ON 90; 4 X 9 (M8 BHCS TO THE RAIL SLOTS); 4 X 6.6 MOTOR-MOUNT; R8 CORNERS

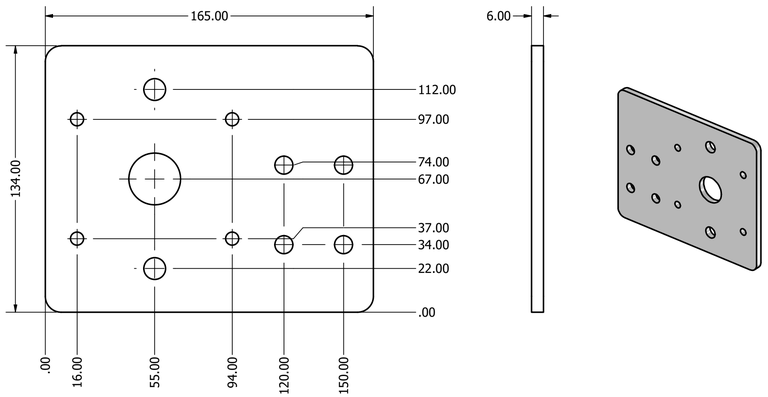


CS-132 TAILPLATE
6061-T6 6 MM, QTY 2, 361 g (INVENTOR)
SCALE 1:1.5 ENVELOPE 185.0 x 134.0 x 6.0 MM
3 TAKE-UP SLOTS +/-15 (26 / 2 X 11 ON 90); 4 X 9 TO THE RAIL; 2 X 6.0 (M6 TAP) TAKE-UP BLOCK

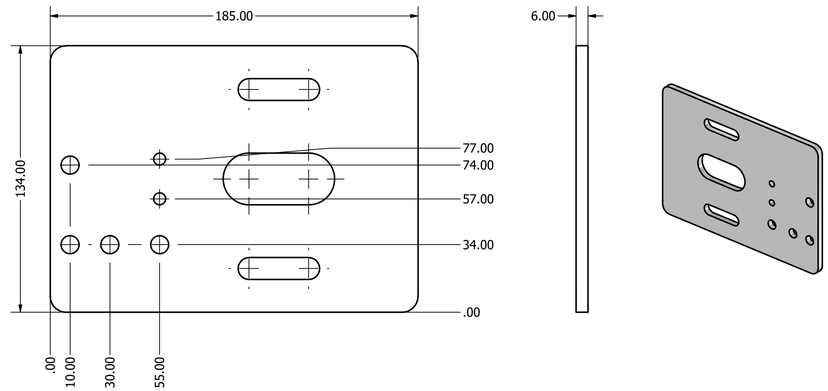

CS-205 MOTORMOUNT
6061-T6, QTY 1, 384 g (INVENTOR)
SCALE 1:1 ENVELOPE 99.0 x 90.0 x 84.0 MM
FRONT PLATE 6: 16 PILOT + 4 X 4.5 ON 25 PCD (ASSUMED 5203 PATTERN - CHECK); LEGS 6, 2 X M6 X 16 TAPPED EACH

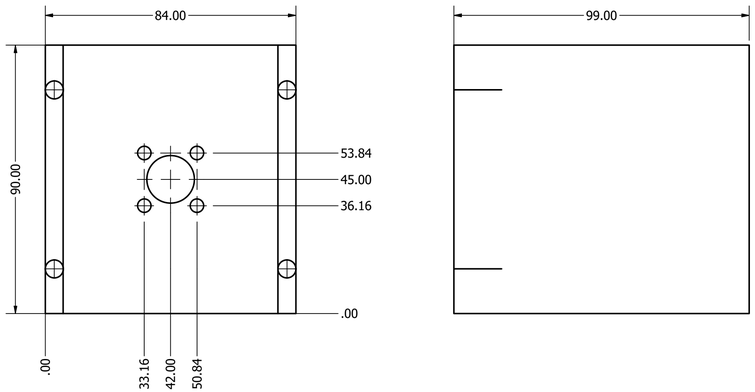


CS-206 TAKEUPBLOCK
6061-T6, QTY 2, 39 g (INVENTOR)
SCALE 1:1 ENVELOPE 30.0 x 30.0 x 20.0 MM
M10 JACK-SCREW THREAD; 2 X 6.6 TO THE TAIL PLATE

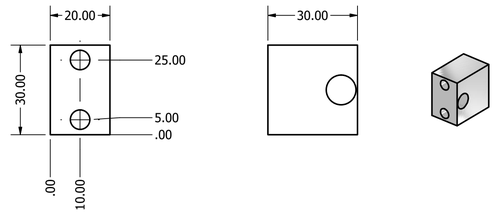


NOTES:
1. 6061-T6 / 1045: MACHINE, BREAK SHARP EDGES 0.5. SHAFTS 1045 CD GROUND 20 h7 (15 h7 COUPLING END). PULLEY BORE 20 H7.
2. 5052-H32 / 6061-T6 SHEET: LASER CUT, DEBURR; CHUTE BENT ON A PRESS BRAKE (INSIDE R = 1.5). PTFE TAPE ON THE PADDLE ITEM FACE.
3. 3D PRINTED: PETG 3 WALLS 25 % GYROID; PA6-CF (DIVERTER HUB + SERVO MOUNT) 4 WALLS 40 % GYROID, DRY 80 C / 8 H. M3/M4 HEAT-SET INSERTS.
4. UNTOLERANCED DIMS +/-0.2 MM (MACHINED), +/-0.3 MM (LASER CUT), +/-0.3 MM (PRINTED). THREADS COSMETIC.
5. ALL DIMENSIONS MM. MACHINE COORDINATES (X BELT TRAVEL, Y LEFT, Z UP). SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/28/2026	
CHECKED		TITLE: ConveyorSorter - part manufacturing drawings
QA		
MFG		
APPROVED		
		SIZE D · DWG NO CS-DWG-100 · REV
		SCALE 2 / 3 · SHEET 2 OF 4


CS-121 SLIDERBED
5052-H32 3 MM, QTY 1, 3509 g (INVENTOR)
SCALE 1:8 ENVELOPE 1410.0 x 310.0 x 3.0 MM
18 X 6.6 C'SUNK (M6 TO THE RAIL SLOTS) AT 150 PITCH ON +/-135

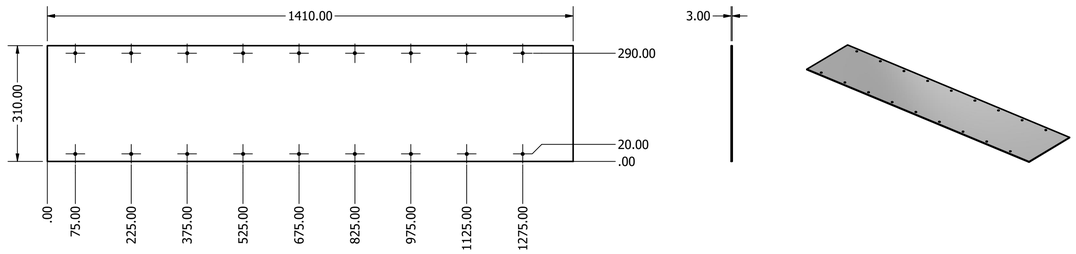


CS-151 EXITCHUTE
5052-H32 1.5 MM, QTY 2, 490 g (INVENTOR)
SCALE 1:2.5 ENVELOPE 302.7 x 240.0 x 233.3 MM
LIP 57 + 300 AT 35 DEG, 60 SIDE WALLS (WELD OR RIVET), 2 X 6.6 TO THE RAIL

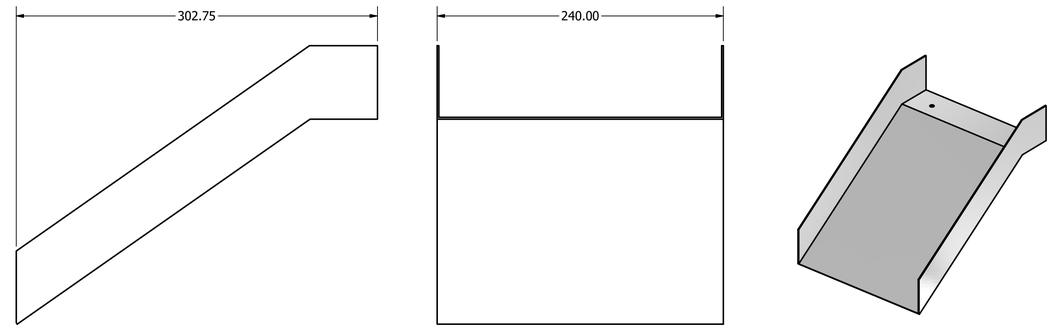

CS-323 DIVERTERPADDLE
6061-T6 3 MM, QTY 2, 145 g (INVENTOR)
SCALE 1:2 ENVELOPE 301.0 x 60.0 x 3.0 MM
R44 - R345 FROM THE SERVO AXIS; 2 X 4.5 CLAMP HOLES; 12 X 45 TIP CHAMFER

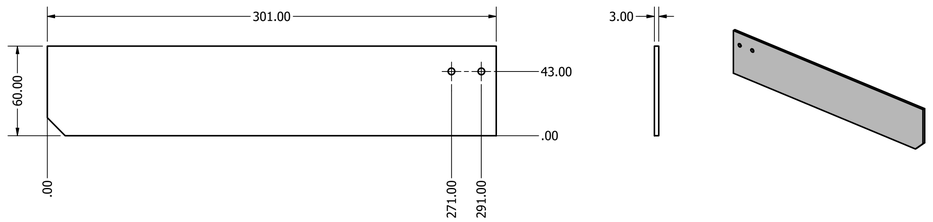

CS-144 GUIDER1
6061-T6 ANGLE 40X25X3, QTY 1, 322 g (INVENTOR)
SCALE 1:4 ENVELOPE 645.0 x 40.0 x 25.0 MM
M6 HOLES AT 150 PITCH; 10 THROUGH-BEAM WINDOW + M5 POST HOLE AT X 280 (GUIDES L1/L2/L3/R2 SIMILAR, SEE BOM)

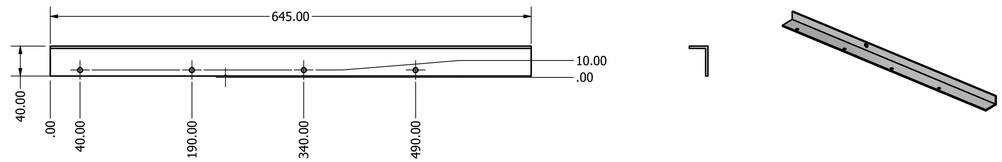

NOTES:
1. 6061-T6 / 1045: MACHINE, BREAK SHARP EDGES 0.5. SHAFTS 1045 CD GROUND 20 h7 (15 h7 COUPLING END). PULLEY BORE 20 H7.
2. 5052-H32 / 6061-T6 SHEET: LASER CUT, DEBURR; CHUTE BENT ON A PRESS BRAKE (INSIDE R = 1.5). PTFE TAPE ON THE PADDLE ITEM FACE.
3. 3D PRINTED: PETG 3 WALLS 25 % GYROID; PA6-CF (DIVERTER HUB + SERVO MOUNT) 4 WALLS 40 % GYROID, DRY 80 C / 8 H. M3/M4 HEAT-SET INSERTS.
4. UNTOLERANCED DIMS +/-0.2 MM (MACHINED), +/-0.3 MM (LASER CUT), +/-0.3 MM (PRINTED). THREADS COSMETIC.
5. ALL DIMENSIONS MM. MACHINE COORDINATES (X BELT TRAVEL, Y LEFT, Z UP). SOURCE: _build/design.py + build_parts.py.


DRAWN	Jay Patel	10/28/2026
CHECKED		
QA		
MFG		
APPROVED		

TITLE: ConveyorSorter - part manufacturing drawings


SIZE	DWG NO	REV
D	CS-DWG-100	

SCALE 1 / 8 SHEET 3 OF 4


CS-322 DIVERTERHUB
PA6-CF, QTY 2, 58 g (INVENTOR)
SCALE 1:1 ENVELOPE 102.0 x 36.0 x 34.0 MM
36 BOSS ON THE SERVO HORN (4 X M3), 84 ARM, 3.2 PADDLE SLOT CLAMPED BY 2 X M4

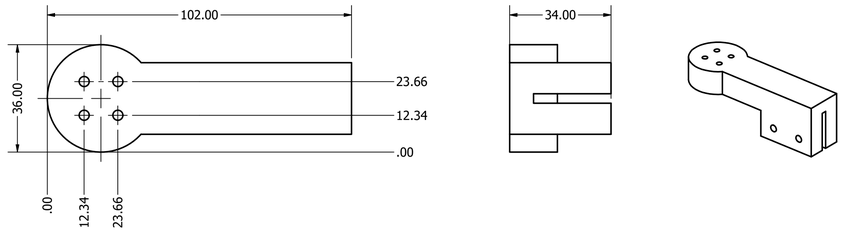


CS-321 SERVOMOUNT
PA6-CF, QTY 2, 25 g (INVENTOR)
SCALE 1:1 ENVELOPE 60.0 x 40.0 x 36.0 MM
BASE 60 X 40 X 6 + 2 TOWERS FOR THE SERVO EARS, 4 X M4 HEAT-SET

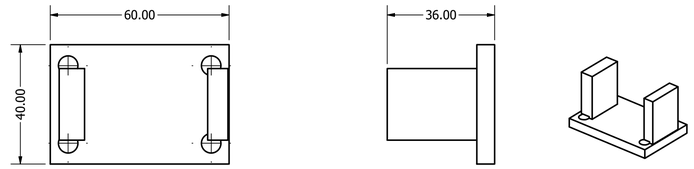


CS-341 CONTROLBOX
PETG, QTY 1, 91 g (INVENTOR)
SCALE 1:2 ENVELOPE 200.0 x 80.0 x 44.0 MM
200 X 47 X 80, WALL 2.5; 4 X 5.5 (M5 TO THE RAIL SLOT); 3 X 12.5 (M12 GLANDS)

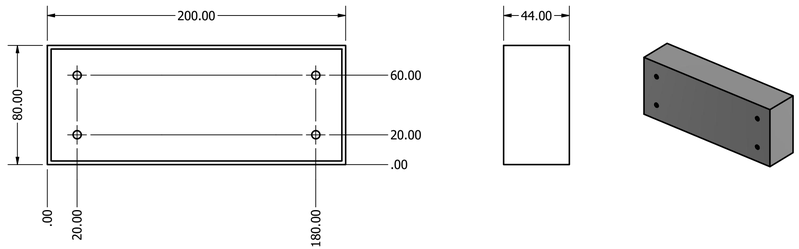


CS-342 CONTROLBOXLID
PETG, QTY 1, 45 g (INVENTOR)
SCALE 1:2 ENVELOPE 200.0 x 80.0 x 3.0 MM
16 START/STOP BUTTON HOLE

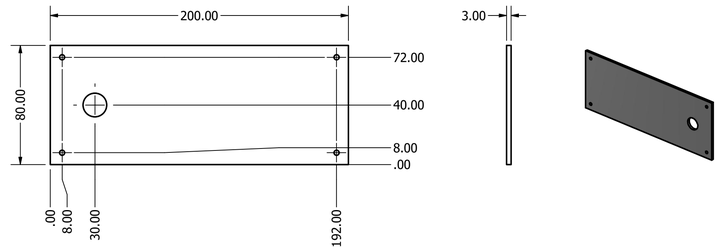

CS-331 TOFHEAD
PETG, QTY 1, 20 g (INVENTOR)
SCALE 1:1 ENVELOPE 36.0 x 30.0 x 20.0 MM
POCKET 19 X 14 X 3 FOR THE VL53L1X CARRIER; M5 INTO THE BEAM SLOT

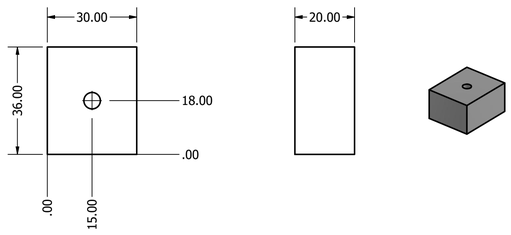

CS-334 BEAMSENSORBRACKET
PETG, QTY 2, 8 g (INVENTOR)
SCALE 1:1.5 ENVELOPE 48.0 x 27.0 x 24.0 MM
M5 INTO THE POST SLOT; 2 X 3.4 SENSOR SCREWS; 6 CABLE EXIT

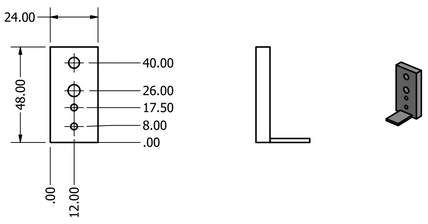

NOTES:
1. 6061-T6 / 1045: MACHINE, BREAK SHARP EDGES 0.5. SHAFTS 1045 CD GROUND 20 h7 (15 h7 COUPLING END). PULLEY BORE 20 H7.
2. 5052-H32 / 6061-T6 SHEET: LASER CUT, DEBURR; CHUTE BENT ON A PRESS BRAKE (INSIDE R = 1.5). PTFE TAPE ON THE PADDLE ITEM FACE.
3. 3D PRINTED: PETG 3 WALLS 25 % GYROID; PA6-CF (DIVERTER HUB + SERVO MOUNT) 4 WALLS 40 % GYROID, DRY 80 C / 8 H. M3/M4 HEAT-SET INSERTS.
4. UNTOLERANCED DIMS +/-0.2 MM (MACHINED), +/-0.3 MM (LASER CUT), +/-0.3 MM (PRINTED). THREADS COSMETIC.
5. ALL DIMENSIONS MM. MACHINE COORDINATES (X BELT TRAVEL, Y LEFT, Z UP). SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/28/2026	
CHECKED		TITLE: ConveyorSorter - part manufacturing drawings
QA		
MFG		
APPROVED		
		SIZE D · DWG NO CS-DWG-100 · REV
		SCALE 1 : 1 · SHEET 4 OF 4