



3.2.96.1 FOR GEARBOX

ISUZU MZZ 6G
 MZZ 6U

| | |
|-----------------------------|--------|
| MOUNT: | LHS |
| OUTPUT: | 3 Bolt |
| OUTPUT TORQUE (kgm): | 25 |
| WEIGHT (kg): | 9.5 |
| SHIFTER: | Vacuum |
| PUMP ROTATION: | ACW |

32961 X XX 1 X

Basic serial number _____

Version _____

1 = Pneumatic control
3 = Mechanical push-pull control
5 = Vacuum control

Companion flange for remote transmission
0 = No option
1 = Spicer 1120 Code 2.05.054.0000
2 = Spicer 1300 Code 2.05.055.0000
3 = DIN 00 Code 2.05.056.0000
6 = DIN 10 Code 2.05.077.0000

Output shaft option _____



| OUTPUT OPTIONS | | CODE |
|----------------|--------------|-----------------|
| Z: | PZB 3 Bolt | KIT 205P0020000 |
| I: | ISO 4 Bolt | KIT 205X0450000 |
| K: | K1300 Flange | KIT 205F5970000 |



**MEGA
PACIFIC**

Transport Hydraulics—The Power to Move

**Power Take Off
32961**

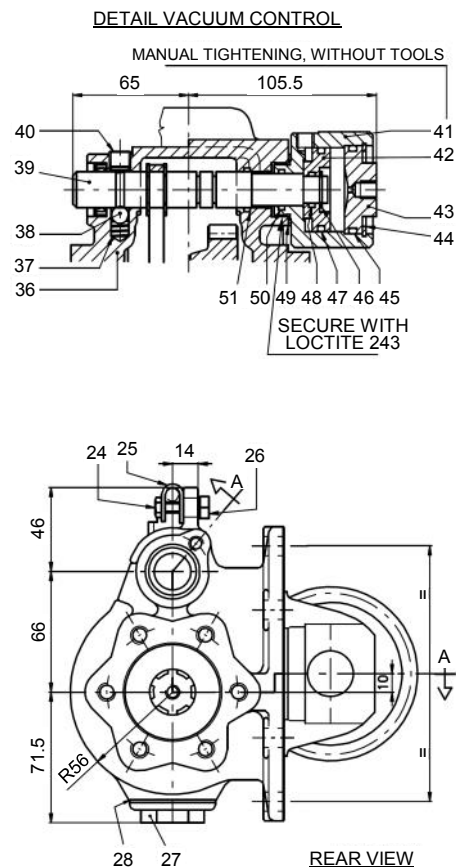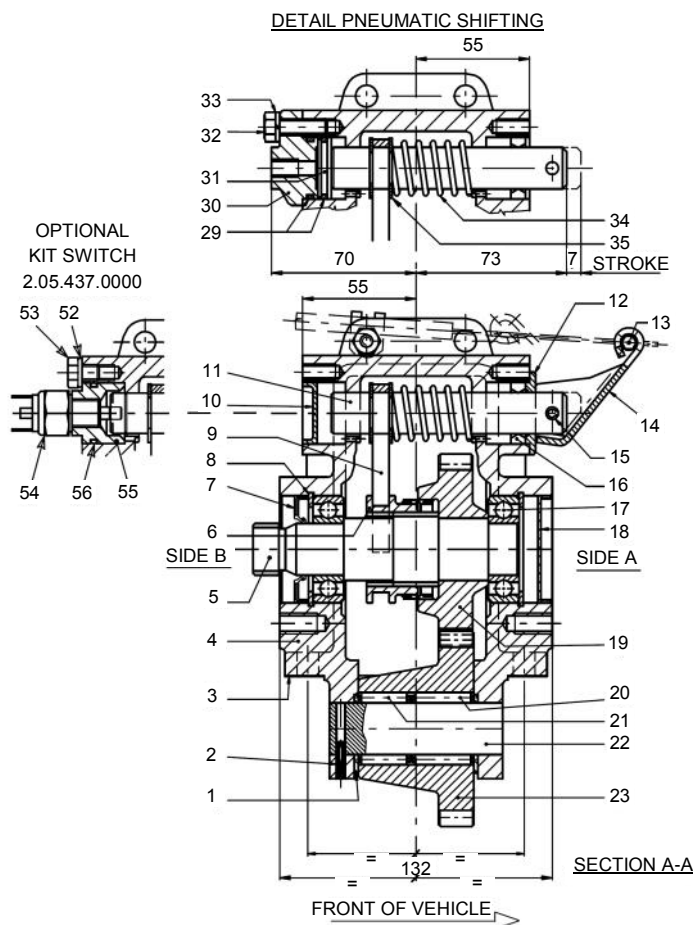

| REF | CODE | DESCRIPTION | QTY | REF | CODE | DESCRIPTION | QTY |
|-----|----------------|--|-----|---|----------------|---------------------------------------|-----|
| 1 | 1.27.01.033.00 | Washer 43x25,2x2 | 2 | 30 | 1.24.01.089.00 | Cover | 1 |
| 2 | 0.05.02.001.00 | Roll pin 4x18 UNI 6873 | 1 | 31 | 1.21.02.033.00 | Piston | 1 |
| 3 | 1.29.01.001.00 | Gasket PTO/gearbox SAE 6-bolt/metr.0,5 | 1 | 32 | 0.01.01.002.00 | Capscrew TE M8x25 UNI 5739 CL RES 8.8 | 1 |
| 4 | 1.01.02.090.00 | Housing (PTO 3.2.96.1.1 ~3.2.96.1.3) | 1 | 33 | 0.04.02.002.00 | Lockwasher 8,4 UNI 1751 | 1 |
| 5 | 1.13.01.129.00 | Shaft | 1 | 34 | 1.28.01.084.00 | Coil spring | 1 |
| 6 | 1.17.02.069.00 | Splined sleeve | 1 | 35 | 0.07.03.001.00 | Circlip RS15 UNI 7434 | 2 |
| 7 | 0.08.01.001.00 | Seal 25x52x8 | 1 | 36 | 1.01.02.141.00 | Housing (PTO 3.2.96.4.5) | 1 |
| 8 | 0.07.02.004.00 | Circlip 52i UNI 7437 | 2 | 37 | 1.28.01.010.00 | Coil spring CAC1/4 | |
| 9 | 1.22.01.050.00 | Fork | 1 | 38 | 0.11.01.002.00 | Ball 3/8" | 1 |
| 10 | 0.12.01.055.00 | Screw plug 30x7 | 1 | 39 | 1.14.03.085.00 | Shaft | 1 |
| 11 | 1.14.03.073.00 | Shaft | 1 | 40 | 0.12.01.015.00 | Plug | 1 |
| 12 | 1.27.02.090.00 | Washer | 1 | 41 | 1.08.02.025.00 | Cylinder | 1 |
| 13 | 0.99.00.132.00 | Clamp with head screw art.1713 | 1 | 42 | 1.21.02.049.00 | Piston | 1 |
| 14 | 1.23.00.041.00 | Lever | 1 | 43 | 1.24.01.004.00 | Cover mod4/2 G1/8 | 1 |
| 15 | 0.05.02.019.00 | Lever | 1 | 44 | 0.07.02.003.00 | Circlip 49i UNI 7437 | 1 |
| 16 | 0.08.01.005.00 | Seal 20x30x7 | 1 | 45 | 0.08.02.004.00 | O-ring OR 147 | 1 |
| 17 | 0.10.01.044.00 | Bearing 6205 ETN9 | 2 | 46 | 0.07.01.027.00 | Circlip AS15x1,5 DIN 471 | 1 |
| 18 | 0.12.01.044.00 | Screw plug 52x7 | 1 | 47 | 0.08.02.107.00 | O-ring OR 144 60" Shore | 1 |
| 19 | 1.11.10.169.00 | Gear 19 T | 1 | 48 | 0.08.02.003.00 | O-ring OR 119 | 1 |
| 20 | 0.10.06.007.00 | Needle cage K25x35x30 | 1 | 49 | 0.04.01.119.00 | Washer 1" | 1 |
| 21 | 0.10.06.008.00 | Needle cage K25x35x25 | 1 | 50 | 0.08.02.100.00 | O-ring OR 123 | 1 |
| 22 | 1.14.01.048.00 | Shaft | 1 | 51 | 0.08.02.014.00 | O-ring OR 3081 | 1 |
| 23 | 1.11.01.198.00 | Gear 26 T | 1 | OPTIONAL: KIT SWITCH 2.05.437.0000 | | | |
| 24 | 0.01.01.027.00 | Capscrew TE M6x20 UNI 5739 CL RES 8.8 | 1 | 52 | 0.04.01.065.00 | Washer 8,4 DIN 433 | 1 |
| 25 | 1.99.00.181.00 | Hose clamp | 1 | 53 | 0.01.01.029.00 | Capscrew TE M8x10 UNI 5739 CL RES 8.8 | 1 |
| 26 | 1.30.02.020.00 | Hex nut | 1 | 54 | 0.99.00.226.00 | Indicator switch | 1 |
| 27 | 0.12.01.074.00 | Retainer 1" Gas | 1 | 55 | 1.99.00.290.00 | Bracket for switch | 1 |
| 28 | 0.08.99.005.00 | Gasket 1" | 1 | 56 | 0.08.02.013.00 | O-ring OR 3100 | 1 |
| 29 | 0.08.02.013.00 | O-ring OR 3100 | 2 | | | | |

AUSTRALIA
1300 30 30 10

NEW ZEALAND
07 928 7722