

0.36"(9.20mm)Dual Digit 7 Segment Display

Features:

- *High segment intensity
- *Wide viewing angle
- *Range of colours
- *Gray face White segment
- *Rohs compliant

Available option:

- *Alternative face and segment colour
- *Alternative font
- *Cropped terminal pins
- *Available emitting colour
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C





Part Number Common Cathode	Part Number Common Anode	Emitting Colors	Peak Wavelength	Forward Voltage VF/Seg.		Luminous Intensity Iv/seg.	
				Typ.	Max.	Min.	Typ.
LD-D036R-CC	LD-D036R-C	GaP/GaP Red	700	2.25	2.50	0.40	0.80
LD-D036HR-CC	LD-D036HR-C	GaAlAs/GaAs SH Hi-Red	660	1.80	2.20	8.00	12.00
LD-D036SR-CC	LD-D036SR-C	GaAlAs/GaAs DH Super Red	660	1.80	2.20	22.00	28.00
LD-D036O-CC	LD-D036O-C	GaAsP/GaP Orange	632	2.10	2.50	8.00	12.00
LD-D036Y-CC	LD-D036Y-C	GaAsP/GaP Yellow	585	2.10	2.50	4.0	7.00
LD-D036G-CC	LD-D036G-C	GaP/GaP Green	570	2.20	2.50	7.00	11.00
Units			nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	H	S	D	E	Y	G	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	50	100	100	100	100	100	mA
DC Forward Current Per Seg.		I _F	15	25	25	30	30	30	mA
Reverse Current Per Seg.	V _r =5V	I _R	10	10	10	10	10	10	μ A
Power Dissipature		P _D	40*16	60*16	60*16	80*16	80*16	80*16	mW
Operating Temperature		T _{OPR}	-40 to +80						°C
Storage Temperature		T _{TSG}	-40 to +85						°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260						°C

0.36"(9.20mm)Dual Digit 7 Segment Display


PACKAGE DIMENSION

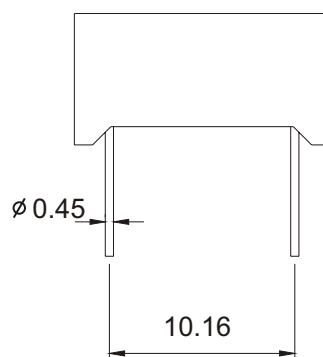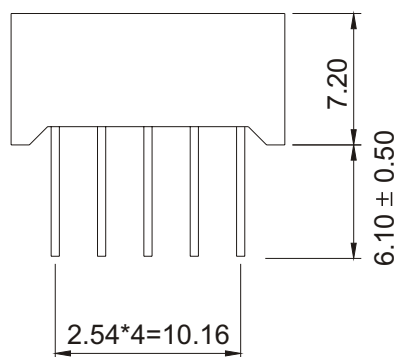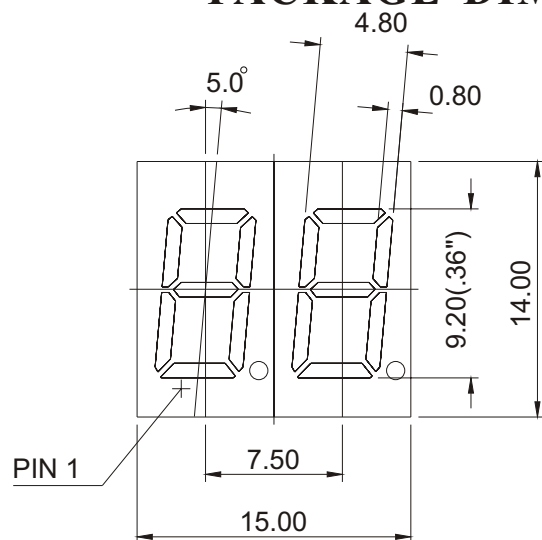

Tolerance $\pm 0.25\text{mm}$ unless stated

INTERNAL CIRCUIT DIAGRAM

Common Cathode
LD-D036X-CC

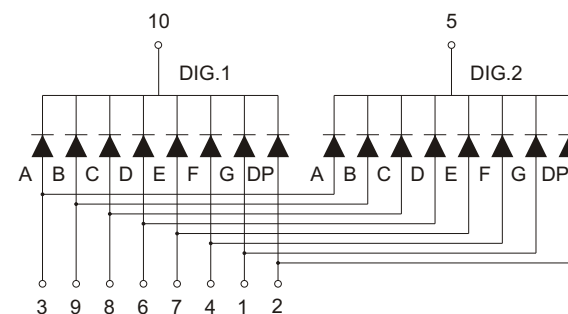

Common Anode
LD-D036X-C

