

WAAS
CH **93541**
W10A

APP CRS
100°

Rwy Idg
TDZE
Apt Elev
5000
18
22

RNAV (GPS) RWY 10

CAPE MAY COUNTY (WWD)

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54° C. Circling NA for Cats C and D northeast of Rwy 19 and 28. Rwy 10 helicopter visibility reduction below ¾ SM NA. Circling Rwy 1 NA at night.


MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct SIE VORTAC and hold.

AWOS-3PT
118.275

ATLANTIC CITY APP CON
124.6 327.125

CLNC DEL
121.7

UNICOM
122.7 (CTAF) **0**

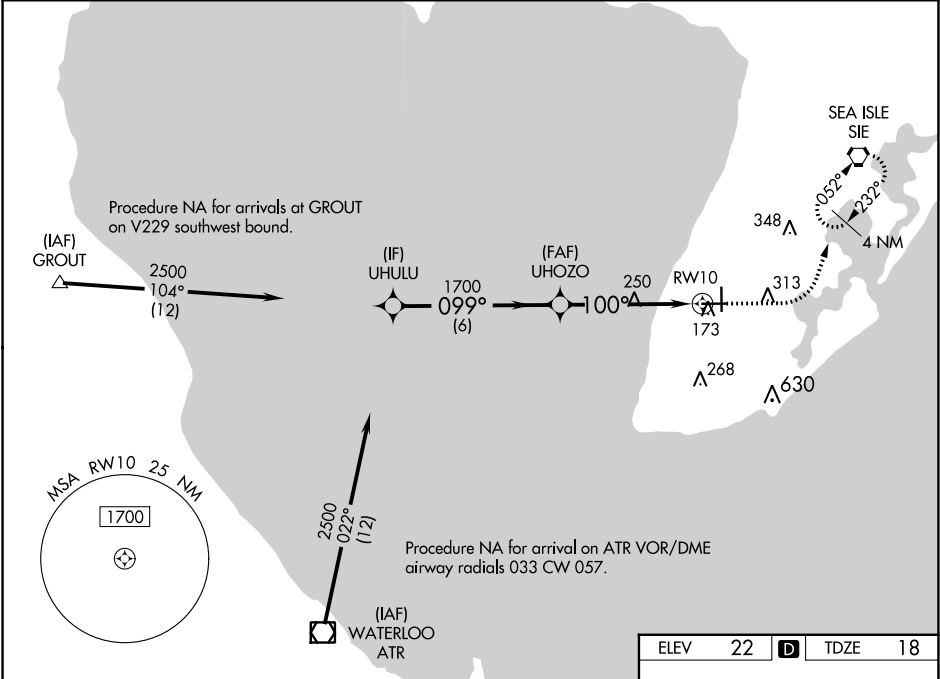

ELEV	22	D	TDZE	18
------	----	---	------	----

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).

500

2000

SIE

UHULU

2500

099°

1700

UHOZO

1700

100°

RW10

1.4 NM to RW10

6 NM

3.7 NM

1.4 NM

GP 3.00°

TCH 56

* LNAV only

CATEGORY	A	B	C	D
LPV DA	285-7⁄8 267 (300-7⁄8)			
LNAV/VNAV DA	336-1 318 (400-1)			
LNAV MDA	500-1	482 (500-1)	500-13⁄8	482 (500-13⁄8)
CIRCLING	500-1 478 (500-1)	620-1 598 (600-1)	620-11⁄2 598 (600-11⁄2)	980-3 958 (1000-3)

