

WAAS CH <b>82026</b> <b>W04A</b>	APP CRS <b>044°</b>	Rwy Idg <b>5000</b> TDZE <b>1664</b> Apt Elev <b>1664</b>
--	------------------------	---

# RNAV (GPS) RWY 4

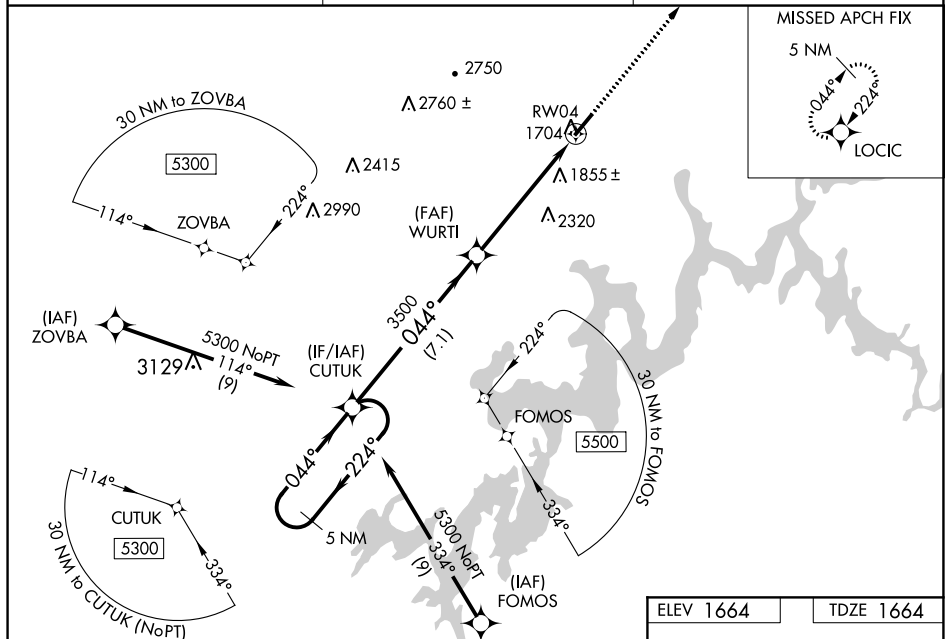

## ROCKWOOD MUNI (RKW)

**NA** Baro-VNAV NA when using Crossville altimeter setting. For uncompensated Baro-VNAV systems, **NA/VNAV NA** below -18°C (0°F) or above 33°C (91°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crossville altimeter setting: increase DA to 1989 feet and LPV and **NAV/VNAV** visibility all Cats ¼ SM, increase all MDA 80 feet and **NAV Cat C** and **D** visibility ⅓ SM and Circling **Cat C** visibility ½ SM.

**MISSED APPROACH:** Climb to 5600 direct LOCIC and hold, continue climb-in-hold to 5600.

AWOS-3  
118.775

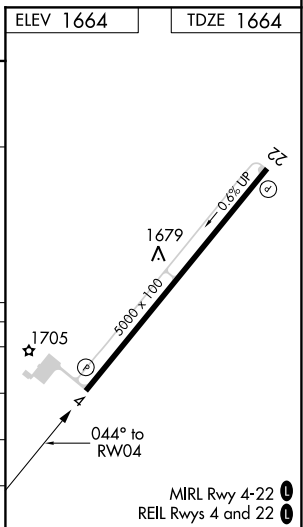
ATLANTA CENTER  
133.6 254.3

UNICOM  
122.8 (CTAF) 

5 NM Holding Pattern	VGSI and RNAV glidepath not coincident CUTUK (VGSI Angle 3.00/TCH 26).
-------------------------	---

5600	LOCIC
------	-------

CATEGORY	A	B	C	D
LPV DA	1914- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$ )			
LNAV/VNAV DA	1914- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$ )			
LNAV MDA	2100-1	436 (500-1)	2100-1 $\frac{3}{8}$	436 (500-1 $\frac{3}{8}$ )
CIRCLING	2100-1 436 (500-1)	2200-1 536 (600-1)	2260-1 $\frac{1}{2}$ 596 (600-1 $\frac{1}{2}$ )	2780-3 1116 (1200-3)



ROCKWOOD, TENNESSEE  
Orig-B 12AUG21

35°55'N-84°41'W

ROCKWOOD MUNI (RKW)  
RNAV (GPS) RWY 4

SE-1, 13 JUL 2023 to 10 AUG 2023