

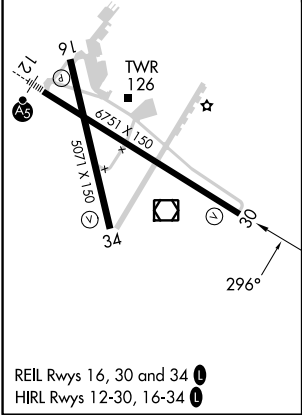
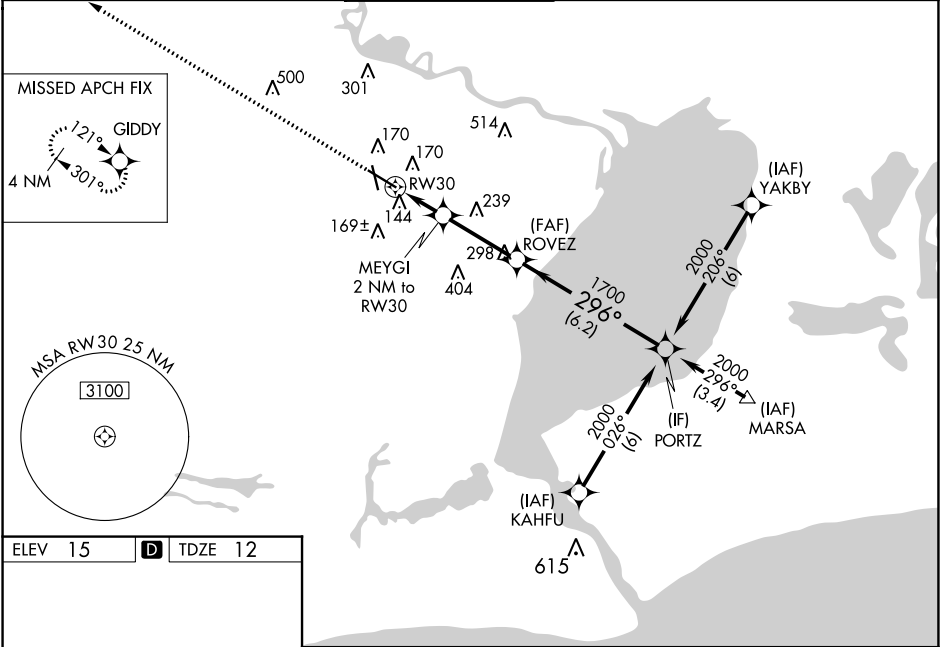
WAAS CH 69216 W30A	APP CRS 296°	Rwy Idg TDZE Apt Elev	6751 12 15
--	------------------------	-----------------------------	---------------------------------------



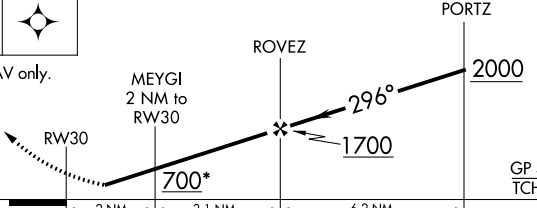
RNAV (GPS) RWY 30

JACK BROOKS RGNL (BPT')

RNP APCH.		MISSED APPROACH: Climb to 3000 direct GIDDY and hold.
RADAR required.		
<div><div><div>▼</div><div>▲</div></div><div>Baro-VNAV NA when using Orange County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). Rwy 30 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Orange County altimeter setting: increase LPV DA to 295 feet; increase LNAV/VNAV DA to 436 feet; increase all MDAs 40 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ SM and LNAV Cat E visibility ¼ SM.</div></div>		

ATIS 126.3	HOUSTON APP CON 121.3 377.1	BEAUMONT TOWER* 119.5 (CTAF) 0	GND CON 124.85	CLNC DEL 118.3	UNICOM 122.95
----------------------	---------------------------------------	--	--------------------------	--------------------------	-------------------------



3000	GIDDY					
						
*LNAV only.						
						
CATEGORY	A		B	C	D	E
LPV DA	263-¾ 251 (300-¾)					
LNAV/ VNAV	DA		404-1¼ 392 (400-1¼)			404-1½ 392 (400-1½)
LNAV MDA	540-1	528 (600-1)	540-1½ 528 (600-1½)	540-1¾	528 (600-1¾)	

SC-5, 13 JUL 2023 to 10 AUG 2023

SC-5, 13 JUL 2023 to 10 AUG 2023