

WAAS CH 78228 W07A	APP CRS 071°	Rwy Idg TDZE 5001 775 Apt Elev 781
--	------------------------	--

RNAV (GPS) RWY 7


ROCHELLE MUNI/KORITZ FLD (RPJ)

⚠

Baro-VNAV NA when using Chicago/Rockford Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting: increase all DA to 1073 feet and all MDA 60 feet; increase LNAV visibility Cats C/D ¼ mile; increase Circling Cat C visibility ¼ mile. VDP NA when using Chicago/Rockford Intl altimeter setting.

MISSED APPROACH:
Climb to 2600 direct BELDE and hold.

AWOS-3 125.2	ROCKFORD APP CON 126.0 327.0	UNICOM 122.975 (CTAF)
------------------------	--	---------------------------------

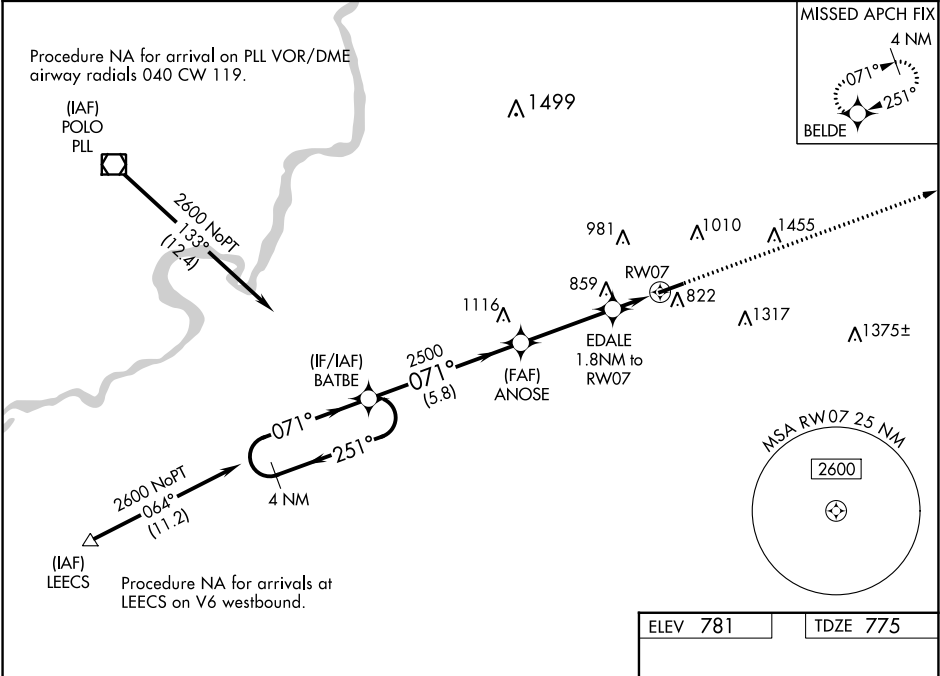

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 22).

ELEV 781

TDZE 775

CATEGORY

A

B

C

D

LPV DA

1025-1

250 (300-1)

LNAV/VNAV DA

1025-1

250 (300-1)

LNAV MDA

1120-1

345 (400-1)

CIRCLING

1260-1
479 (500-1)

1360-1
579 (600-1)

1680-2¾
899 (900-2¾)

1820-3
1039 (1100-3)

2600

BELDE

MIRL Rwy 7-25

REIL Rws 7 and 25

ROCHELLE, ILLINOIS

Amdr 2 10DEC15

41°54'N-89°05'W

ROCHELLE MUNI/KORITZ FLD (RPJ)

RNAV (GPS) RWY 7