WAAS CH 81813 W31A	APP CRS 309°	Rwy ldg 5997 TDZE 174 Apt Elev 178

RNAV (GPS) RWY 31
ALICE INTL (ALI)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Nueces County altimeter setting: Increase LPV DA to 493 feet, LNAV/VNAV DA to 523 feet and LNAV/VNAV all Cats visibility to ⅞ SM; increase all MDA 60 feet and LNAV Cat C and D and Circling Cat D visibility ¼ SM. For inop MALS, increase LPV all Cats visibility to ⅞ mile. For inop MALS with Nueces County altimeter setting, increase LNAV/VNAV all Cats and LNAV Cats C, D visibility to 1⅛ mile. VDP NA when using Nueces County altimeter setting.

MALS

MISSED APPROACH: Climb to 2100 direct UWAGO and hold.

ASOS	KINGSVILLE APP CON *	UNICOM
119.225	119.9 290.45	123.0 (CTAF) L

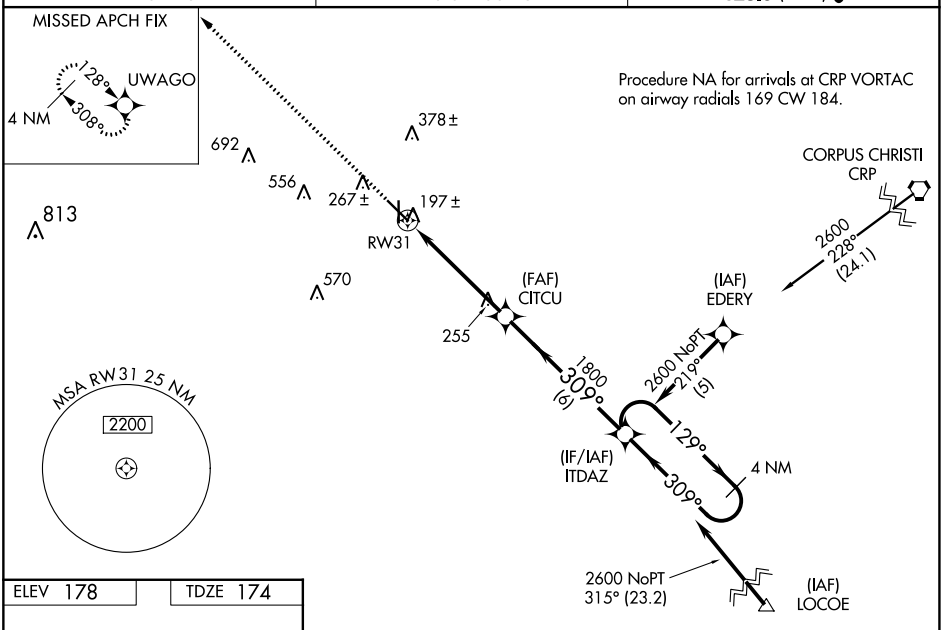

ELEV 178 TDZE 174



REIL Rwy 13 L
MIRL Rwys 13-31 and 17-35 L

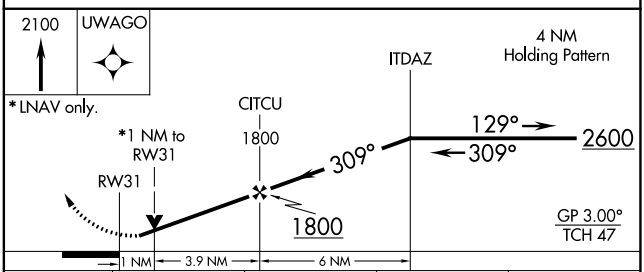

CATEGORY	A	B	C	D
LPV DA	437-¾ 263 (300-¾)			
LNAV/VNAV DA	467-¾ 293 (300-¾)			
LNAV MDA	520-¾ 346 (400-¾)			
CIRCLING	600-1 422 (500-1)	640-1 462 (500-1)	680-1½ 502 (600-1½)	900-2¼ 722 (800-2¼)

SC-3, 13 JUL 2023 to 10 AUG 2023
SC-3, 13 JUL 2023 to 10 AUG 2023