



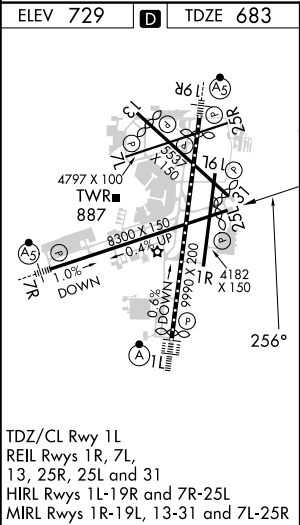

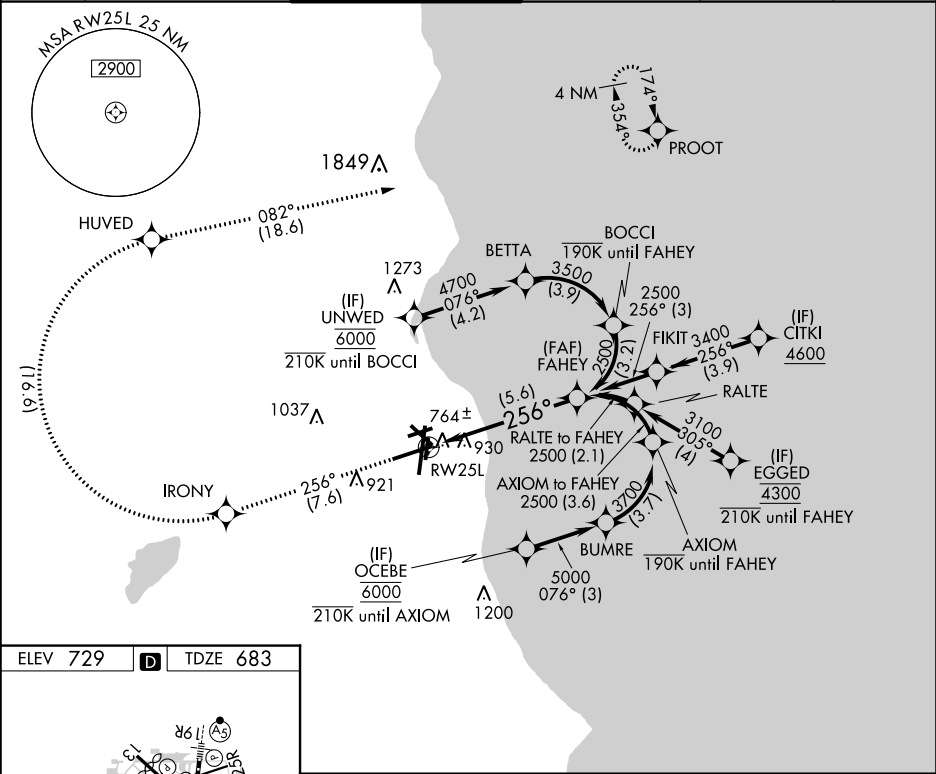


APP CRS	Rwy Idg	7867
256°	TDZE	683
	Apt Elev	729

RNAV (RNP) Y RWY 25L

GENERAL MITCHELL INTL (MKE)

RF required. RNP AR APCH.			MISSED APPROACH: Climb to 3700 on the RNAV missed approach route to PROOT and hold.		
▼ For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.					
D-ATIS	MILWAUKEE APP CON	MILWAUKEE TOWER	GND CON	CLNC DEL	CPDLC
126.4	126.5 307.0	124.575 269.05	121.8 263.125	120.8	

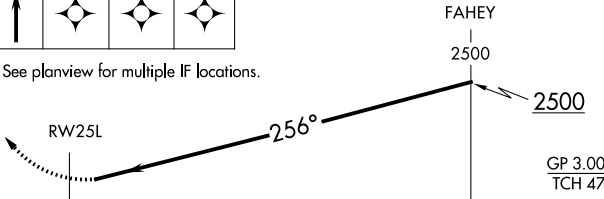

3700	IRONY	HUVED	PROOT	
				
See planview for multiple IF locations.				
				
GP 3.00° TCH 47				
CATEGORY	A	B	C	D
RNP 0.10 DA	1087-13⁄8		404 (400-13⁄8)	
RNP 0.30 DA	1256-2		573 (600-2)	
AUTHORIZATION REQUIRED				