

WAAS CH 42707 W01A	APP CRS 012°	Rwy Idg 6400 TDZE 127 Apt Elev 129
--	------------------------	---

RNAV (GPS) RWY 1L
BETHEL (BET)(PABE)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F).
Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA.
For inop ALS, increase LNAV Cat C/D visibility to RVR 6000.

MALSR




MISSED APPROACH: Climb to 2000
direct KUSKM and left turn on track
257° to ROLLR and hold.

ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7
----------------------	--	--	-------------------------

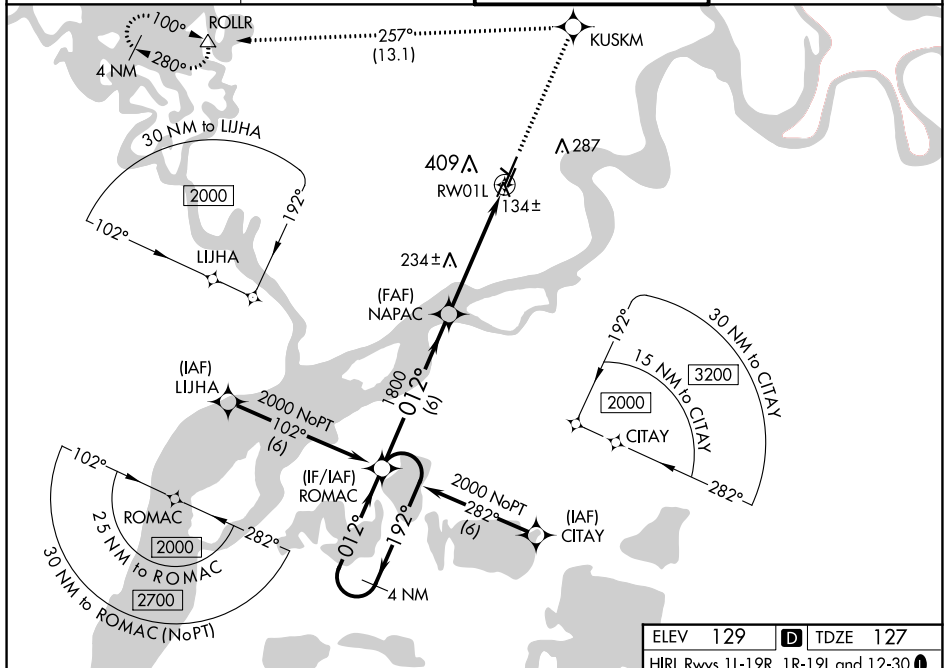

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 39).				2000 	KUSKM 	 tr 257°	ROLL
4 NM Holding Pattern		ROMAC					
2000 GP 3.00° TCH 47		1800		*LNAV only *1.1 NM to RW01L RW01L			
CATEGORY	A	B	C	D			
LPV DA	377/24		250 (300-½)		ROLL		
LNAV/VNAV DA	555/50		428 (500-1)				
LNAV MDA	500/24		373 (400-½)		500/50		373 (400-1)
CIRCLING	500-1 371 (400-1)	600-1 471 (500-1)	600-1½ 471 (500-1½)		680-2 551 (600-2)		

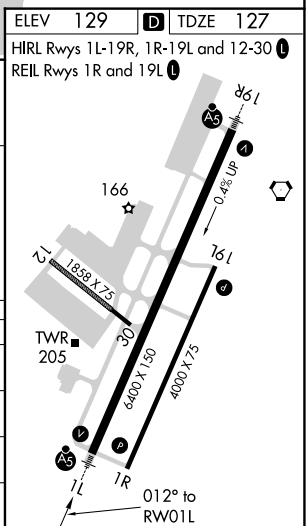

AK, 15 JUN 2023 to 10 AUG 2023