


APP CRS	Rwy ldg	10996
123°	TDZE	2599
	Apt Elev	2643

RNAV (RNP) Y RWY 11L

TUCSON INTL (TUS)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 6000 via 123° track to CURGA, 213° track to REBDE, 303° track to TOYOP and hold.
For uncompensated Baro-VNAV systems, procedure NA below -3°C or above 52°C. For inoperative MALSR, increase RNP 0.30 visibility to RVR 6000 all Cats. GPS required.		

ATIS	TUCSON APP CON	TUCSON TOWER	GND CON	CLNC DEL
123.8 279.65	119.4 318.1	118.3 257.8	120.025 348.6	126.65 326.2

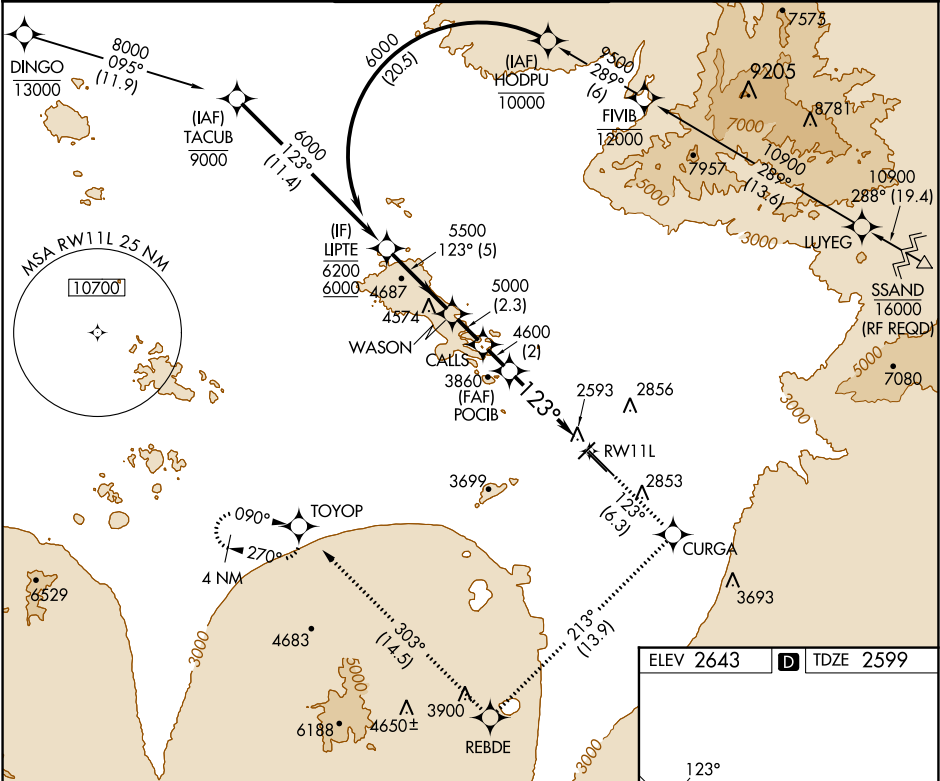

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).

LIPT	WASON	CALLS	POCIB	RWY 11L
6200	5500	5000	4600	
6000				
Procedure Turn NA				
GP 3.00°				
TCH 55				
5 NM	2.3 NM	2 NM	6.1 NM	

CATEGORY	A	B	C	D
RNP 0.30 DA	2947/40 348 (400-¾)			

**AUTHORIZATION REQUIRED**

ELEV 2643 **D** TDZE 2599

HIRL Rwy 11L-29R  
MIRL Rwy 3-21 and 11R-29L  
REIL Rwy 21, 29L and 29R