


WAAS CH <b>97416</b> <b>W25A</b>	APP CRS <b>252°</b>	Rwy Idg TDZE Apt Elev	<b>4000</b> <b>643</b> <b>643</b>
----------------------------------------	------------------------	-----------------------------	-----------------------------------------

# RNAV (GPS) RWY 25

## MASON COUNTY (3I2)


RNP APCH - GPS.

 Circling NA NW of Rwy 7-25. Baro-VNAV NA when using Athens/Albany, OH altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Rwy 25 helicopter visibility reduction below  $\frac{3}{4}$  SM NA. When local altimeter setting not received, use Athens/Albany, OH altimeter setting and increase all DA 61 feet and all MDA 80 feet; increase LPV all Cats visibility  $\frac{1}{4}$  mile and increase LNAV-VNAV all Cats visibility 1 mile. VDP NA when using Ohio University altimeter setting.


**MISSED APPROACH:**  
Climb to 3200 direct  
WAMAX and hold.

AWOS-3  
119.675

HUNTINGTON APP CON  
128.4 270.1

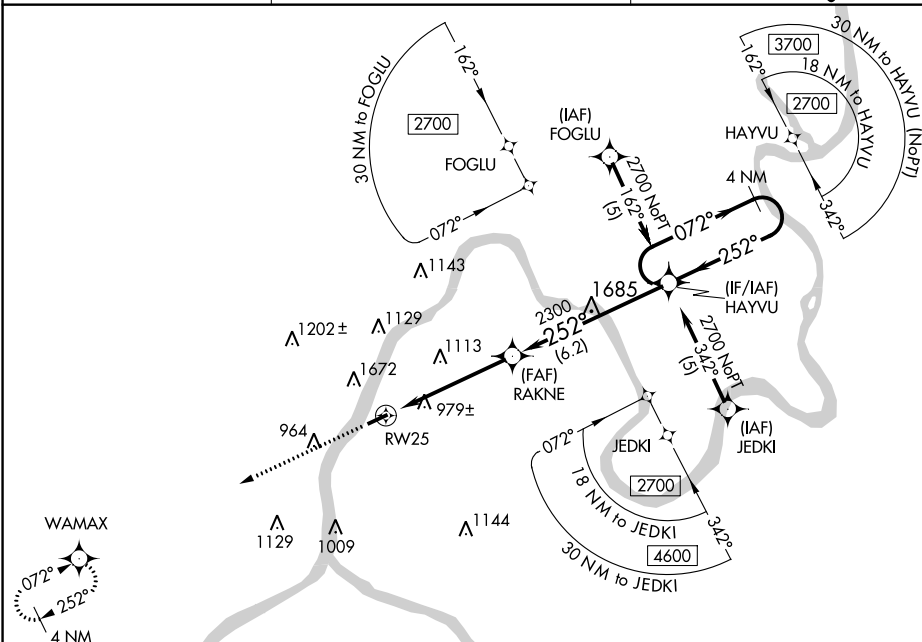UNICOM  
122.8 (CTAF) 

ELEV	643		TDZE	643
------	-----	--	------	-----

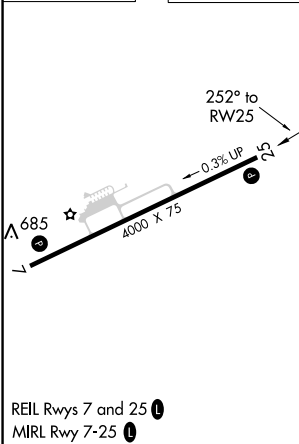

3200		WAMAX		VGSI and RNAV glidepath angles not coincident (VGSI Angle 3.00/TCH 43).				HAYVU		4 NM Holding Pattern	
		RW25		3.2 NM to RW25		RAKNE		252°		072° →	
								2300		← 252°	
										2700	
										GP 3.00° TCH 54	
		3.2 NM		1.8 NM		6.2 NM					
CATEGORY		A		B		C		D			
LPV DA				1430-2¾		787 (800-2¾)					
LNAV/ VNAV DA				1727-4		1084 (1100-4)					
LNAV MDA		1700-1¼ 1057 (1100-1¼)		1700-1½ 1057 (1100-1½)		1700-3		1057 (1100-3)			
CIRCLING		1700-1¼ 1057 (1100-1¼)		1700-1½ 1057 (1100-1½)		1700-3		1057 (1100-3)			

## RNAV (GPS) RWY 25

NE-4, 13 JUL 2023 to 10 AUG 2023