


APP CRS	Rwy Idg	9000
271°	TDZE	3852
	Apt Elev	3877

RNAV (RNP) Y RWY 27

HELENA RGNL (HLN)

RNP AR APCH - GPS.	MALSR	MISSED APPROACH: Climb to 13000 on the RNAV missed approach route to PIXXI and hold, continue climb-in-hold to 13000. *Missed approach requires minimum climb of 260 feet per NM to 7900; if unable to meet climb gradient, see RNAV (RNP) Z RWY 27.
For uncompensated Baro-VNAV systems, procedure NA below -26°C or above 54°C. Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 DA* visibility all Cnts to 1 1/2 SM.		

ATIS 120.4	HELENA APP CON * 119.5 229.4	HELENA TOWER * 118.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
---------------	---------------------------------	--	------------------	------------------

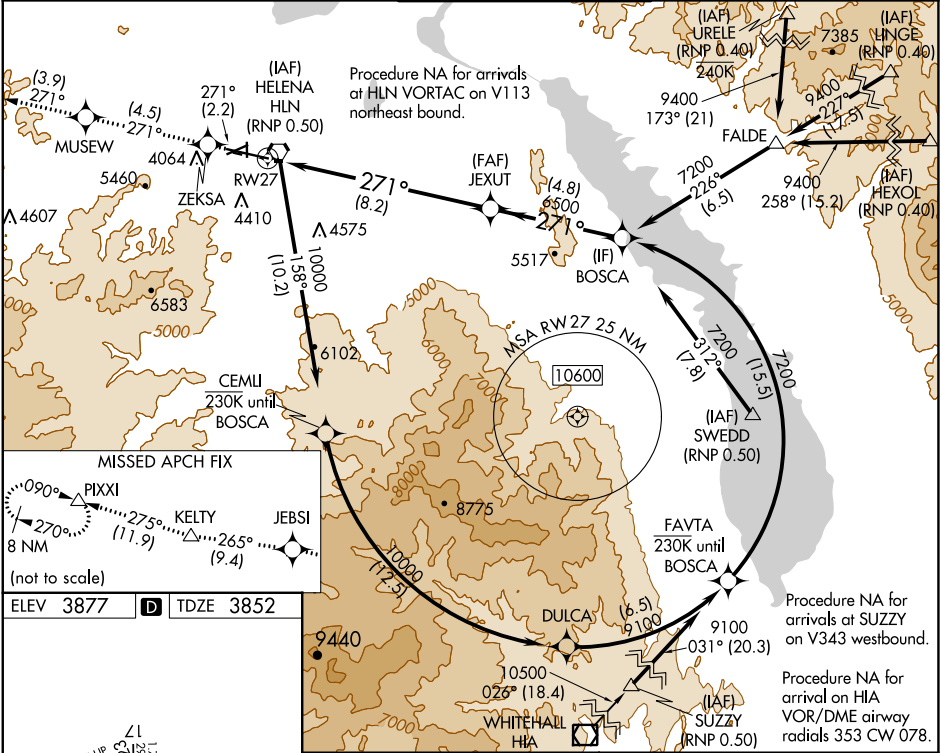

271°			7200		
	GP 3.00° TCH 55'				
	8.2 NM		4.8 NM		
	CATEGORY	A	B	C	D
	RNP 0.15 DA*	4284-¾		432 (500-¾)	
RNP 0.30 DA*	4321-1		469 (500-1)		
REIL Rwys 9, 17, and 35	AUTHORIZATION REQUIRED				
MIRL Rwys 5-23 and 17-35					
HIRL Rwy 9-27					