

WAAS CH 53411 W10A	APP CRS 103°	Rwy Idg 5849 TDZE 901 Apt Elev 911
--	------------------------	---

RNAV (GPS) RWY 10


WAUKESHA COUNTY (UES)

T Baro-VNAV NA when using Lawrence J Timmerman altimeter setting. For
A uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F)
 or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter
 setting not received, use Lawrence J Timmerman altimeter setting: increase LPV
 DA to 1147 feet, LNAV/VNAV DA to 1583 feet and all Cats visibility ¼ SM;
 increase all MDAs 60 feet and Circling Cat C and D visibility ¼ SM.



MISSED APPROACH: Climb to 3000 direct WOGPO and left turn on track 013° to WOGUR and track 312° to HAWKN and hold.

ATIS 118.875	MILWAUKEE APP CON 125.35 307.0	WAUKESHA TOWER ★ 123.7 (CTAF) 0	GND CON 121.6	CLNC DEL 121.6	CLNC DEL 128.7 (When twr closed)	UNICOM 122.95
------------------------	--	--	-------------------------	--------------------------	---	-------------------------

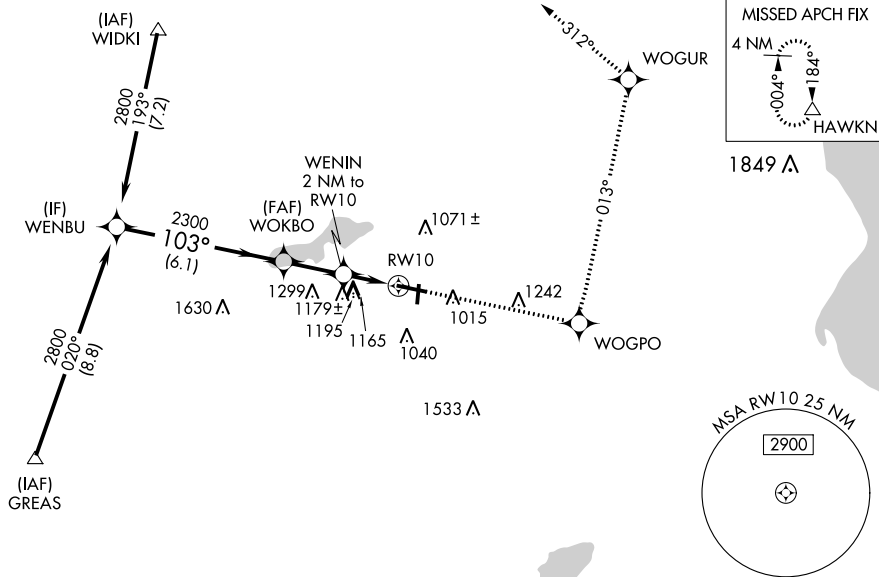

Procedure NA for arrivals at GREAS via V63 southwest bound.

Procedure Turn NA

WENBU

2800

GP 3.00° TCH 53

103°

2300

WOKBO

WENIN 2 NM to RW10

RW10

*1580

6.1 NM

2.2 NM

2 NM

CATEGORY

LPV DA

1101-1½ 200 (200-½)

LNAV/VNAV DA

1537-1¾ 636 (700-1¾)

LNAV MDA

1440-½ 539 (600-½)

1440-1 539 (600-1)

1440-1¼ 539 (600-1¼)

CIRCLING

1460-1 549 (600-1)

1500-1 589 (600-1)

1540-1¾ 629 (700-1¾)

1640-2¼ 729 (800-2¼)

3000

WOGPO

tr 013°

WOGUR

tr 312°

HAWKN

△

*LNAV only

103° to RW10

5849 X 100

3599 X 75

TWR 960

81

28

36