


WAAS CH <b>53643</b> <b>W18A</b>	APP CRS <b>175°</b>	Rwy Idg TDZE Apt Elev	<b>4001</b> <b>854</b> <b>870</b>
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 18  
JONES MEML (3F7)

RNP APCH.	MISSED APPROACH: Climb to 2600 direct DASTE and hold.
▼ ▲ NA	Rwy 18 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. Use Cushing altimeter setting.

CUH AWOS-3 <b>118.25</b>	KANSAS CITY CENTER <b>127.8 319.1</b>	CTAF <b>122.9 0</b>
-----------------------------	--	------------------------

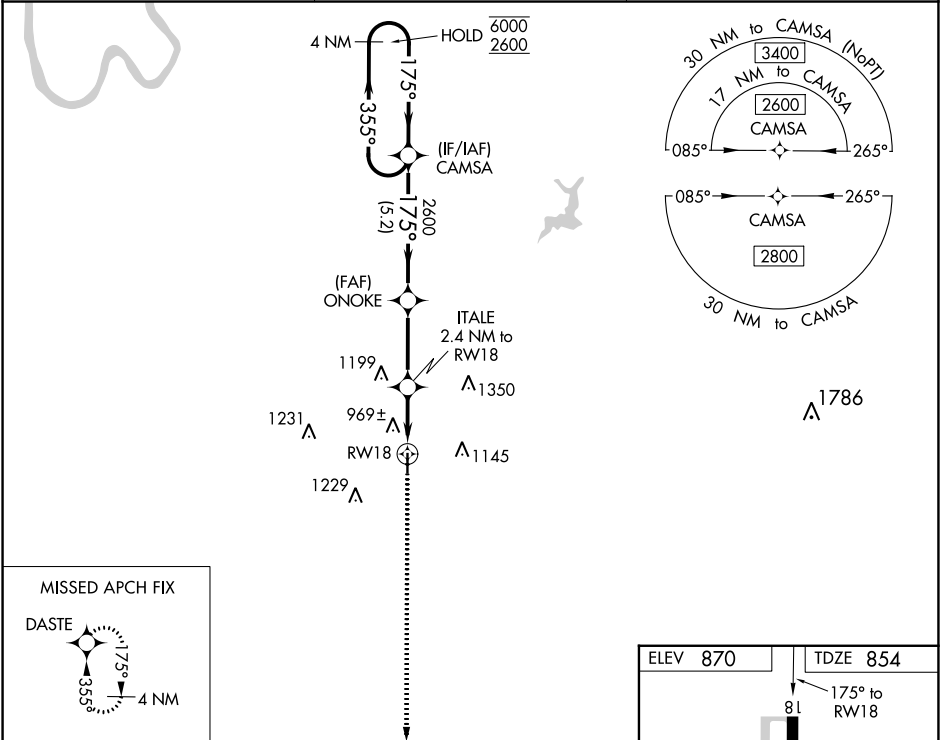

4 NM Holding Pattern		CAMSA	ONOKE	ITAIE	RWY 18
6000 ← 355°		2600	2600	2.4 NM to RWY 18	
GP 3.00°				*1600	
TCH 40		5.2 NM	3.1 NM	2.4 NM	
CATEGORY	A	B	C	D	
LPV DA	1156-1	302 (300-1)		NA	
LNAV/VNAV DA	1191-1	337 (400-1)		NA	
LNAV MDA	1280-1	426 (500-1)	1280-1¼ 426 (500-1¼)	NA	
CIRCLING	1380-1 510 (600-1)	1500-1 630 (700-1)	1600-2 730 (800-2)	NA	

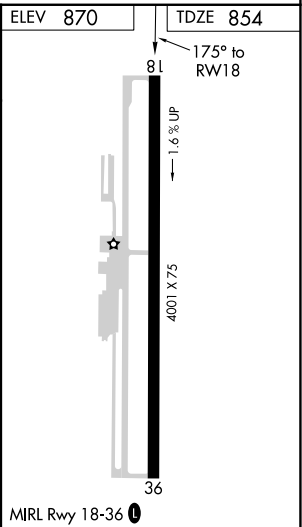

SC-1, 13 JUL 2023 to 10 AUG 2023

SC-1, 13 JUL 2023 to 10 AUG 2023