

APP CRS
274°

Rwy Idg
TDZE
1068

Apt Elev
1099

RNAV (RNP) Y RWY 27

YAKIMA AIR TRML/MCALLISTER FLD (YKM)


RNP APCH - GPS. From MUDE or OVTEE or YIGUN: RF.

▼ For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. DATVE transition NA when R-6714 A, C, D active. For inop ALS, increase RNP 0.30* all Cats visibility to RVR 5500 and RNP 0.30 all Cats to 2½ SM.

MALSR

MISSED APPROACH: Climb to 5100 on track 274° to PUBBO left turn to SIBSY and on track 097° to MUDE and hold.
*Missed approach requires minimum climb of 425 feet per NM to 3400.

ATIS	SPOKANE APP CON	YAKIMA TOWER ★	GND CON	CLNC DEL	UNICOM
125.25	123.8 263.15	133.25 (CTAF) 0 257.8	121.9	121.9	122.95

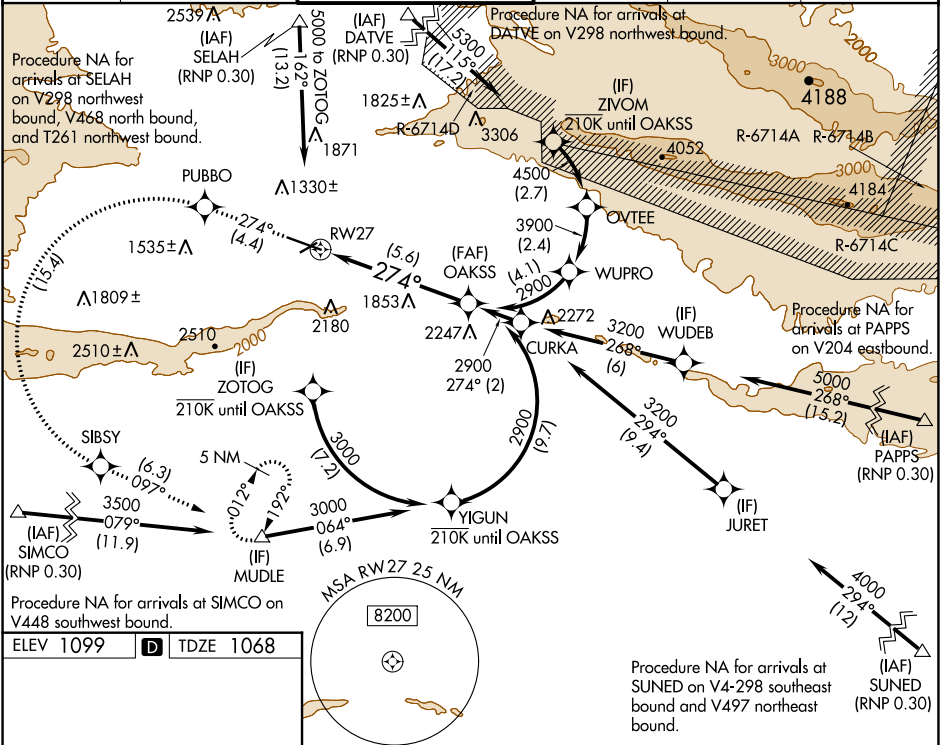

ELEV 1099

TDZE 1068

MIRL Rwy 4-22

HIRL Rwy 9-27

REIL Rwy 4, 9, and 22

5100 PUBBO

tr 274°

SIBSY

tr 097°

MUDE

OAKSS

2900

See planview for multiple IF locations.

RW27

274°

GP 3.00°

TCH 57

5.6 NM

CATEGORY	A	B	C	D
RNP 0.30 DA*	1418/30	350 (400-5%)		
RNP 0.30 DA	1845-1¾	777 (800-1¾)		

AUTHORIZATION REQUIRED