



WAAS CH 42532 W28A	APP CRS 278°	Rwy Idg TDZE Apt Elev	5501 621 621
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

MANISTEE COUNTY/BLACKER (MBL)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2500 direct GOSDE and hold.
Circling to Rwy 1, 19 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.		

AWOS-3PT 118.825	MINNEAPOLIS CENTER 120.85 322.35	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

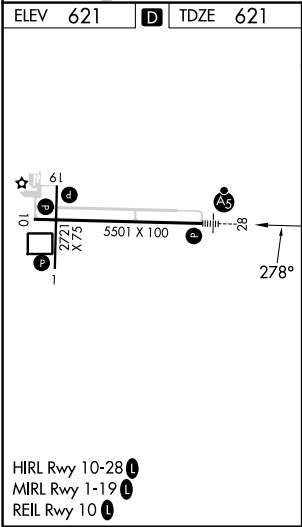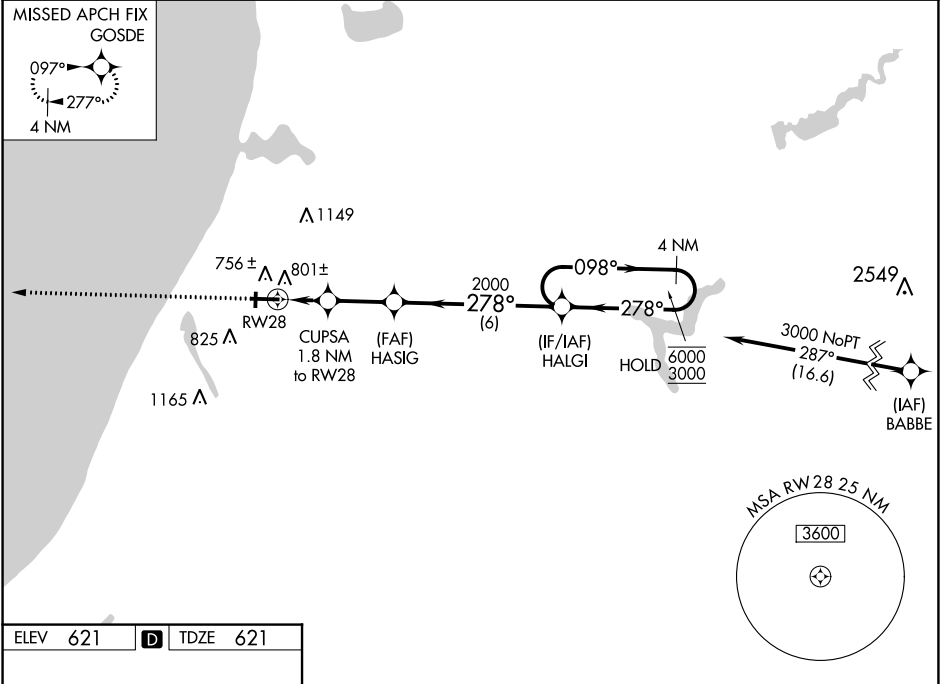

2500	GOSDE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).				4 NM Holding Pattern
		CUPSA 1.8 NM to RW28	HASIG 2000	HALGI	098° → 6000 ← 278° 3000	GP 3.00° TCH 50
		1.2 NM to RW28	1240	2000	6 NM	
CATEGORY	A	B	C	D		
LPV DA	821-1/2		200 (200-1/2)			
LNAV/VNAV DA	984-5/8		363 (400-5/8)			
LNAV MDA	1060-1/2	439 (500-1/2)	1060-3/4	439 (500-3/4)		
CIRCLING	1160-1 539 (600-1)	1220-1 599 (600-1)	1400-2 1/4 779 (800-2 1/4)	1500-2 3/4 879 (900-2 3/4)		

EC-1, 13 JUL 2023 to 10 AUG 2023

EC-1, 13 JUL 2023 to 10 AUG 2023