


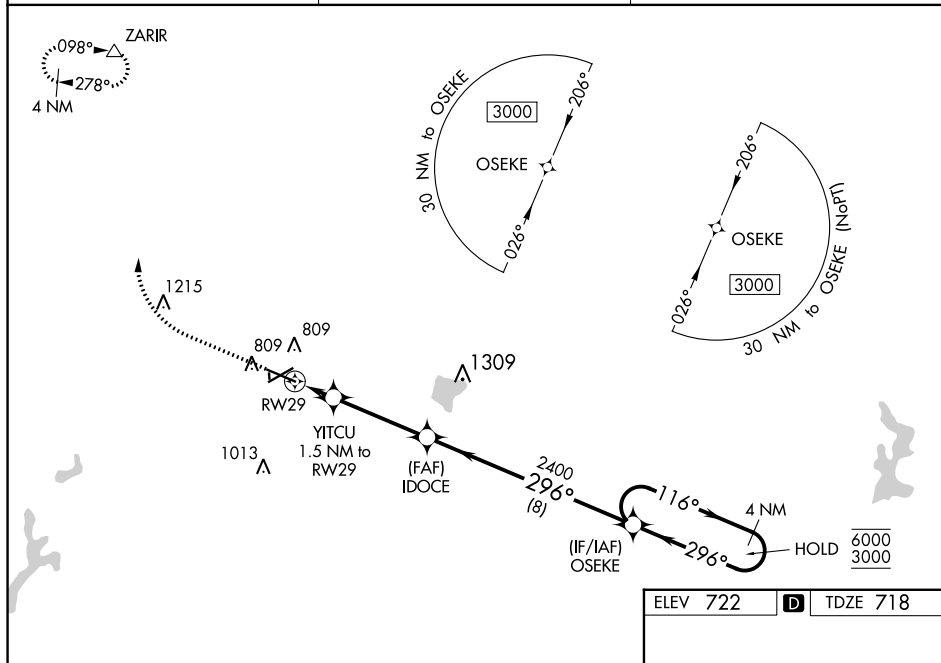


WAAS CH 93510 W29A	APP CRS 296°	Rwy Idg 6501 TDZE 718 Apt Elev 722
--	------------------------	---

RNAV (GPS) RWY 29
COLES COUNTY MEML (MTO)

RNP APCH.	MALSR		MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct ZARIR and hold.
  Circling NA to Rwy's 18 and 36. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM and increase LNAV Cat C/D visibility to 1 SM.			

ASOS 118.475	CHAMPAIGN APP CON ★ 132.85 290.225	UNICOM 122.7 (CTAF) 0
------------------------	--	---------------------------------



2000 ↑	3000 ↗	ZARIR △	4 NM Holding Pattern			
* LNAV only.		YITCU 1.5 NM to RW29	IDOC	2400	OSEKE	
RW29		* 1 NM to RW29	296°		116° → 6000 ← 296° 3000	
1 NM		0.5	3.6 NM	8 NM	GP 3.00° TCH 51	
CATEGORY	A		B	C	D	
LPV DA			918-1/2	200 (200-1/2)		
LNAV/ VNAV DA			1014-1/2	296 (300-1/2)		
LNAV MDA	1080-1/2 362 (400-1/2)		1080-5/8 362 (400-5/8)			
CIRCLING	1160-1 438 (500-1)		1180-1 458 (500-1)		1380-2 658 (700-2)	
			1240-1 1/2 518 (600-1 1/2)			

