


APP CRS	Rwy Idg	8457
070°	TDZE	25
	Apt Elev	25

RNAV (GPS) V RWY 8  
JUNEAU INTL (JNU)(PAJN)

RNP APCH - GPS.	MALSF	MISSED APPROACH: Climbing left turn to 9000 direct MUGGZ and on 281° track to CHILL and hold, continue climb-in-hold to 9000. * Missed approach requires minimum climb of 363 feet per NM to 3200.
<p>⚠ Circling NA at night. Rwy 8 helicopter visibility reduction below 1 SM NA. When Juneau altimeter setting not received, procedure NA.</p> <p>❄ -0°C When VGSI inop, procedure NA at night. Lead-in lights not aligned with final approach course. For inop lead-in lights, increase visibility to 4 SM. Circling NA north of Rwy 8-26.</p>		

ATIS	ANCHORAGE CENTER	JUNEAU TOWER ★	GND CON	CLNC DEL	JUNEAU RADIO
135.2	133.9	118.7 (CTAF) 278.3	121.9	121.9	122.2 243.0

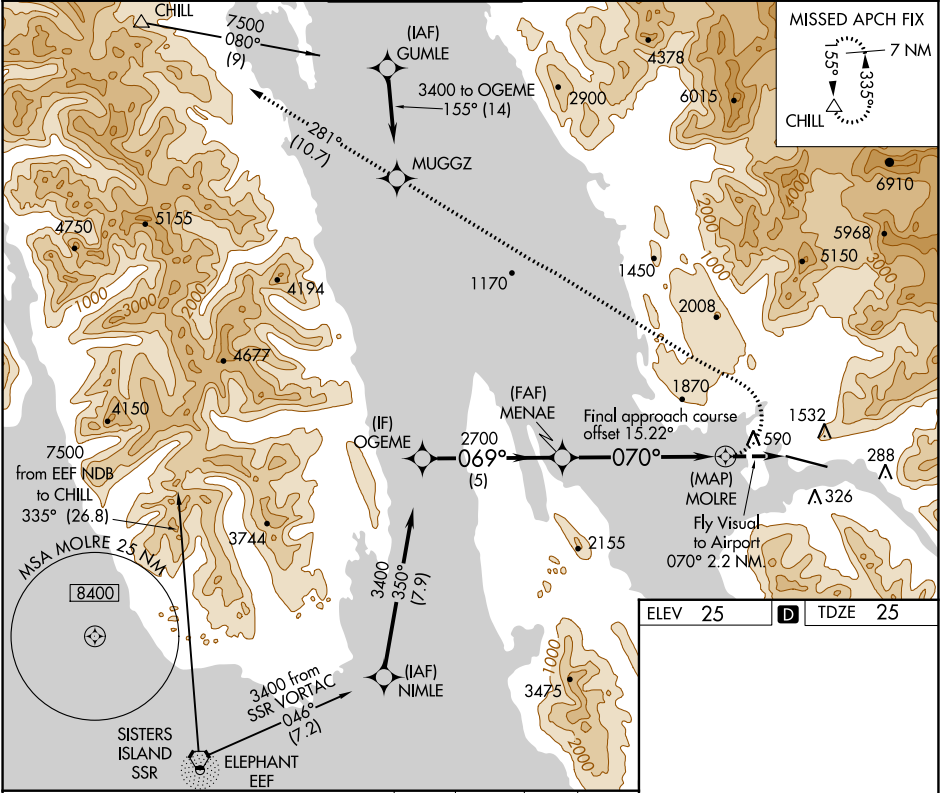

OGEME	VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 38).		9000	MUGGZ	CHILL
3400	069°	2700	070°	tr 281°	△
5 NM		5.8 NM	2.2 NM	Fly Visual to Airport 070° 2.2 NM.	
CATEGORY	A	B	C	D	
LNAV MDA*	1880-2	1855 (1900-2)	NA		
LNAV MDA	2340-3	2315 (2400-3)	NA		
Ⓢ CIRCLING	2340-3	2315 (2400-3)	NA		

