

WAAS CH 70502 W11A	APP CRS 112°	Rwy Idg TDZE 142 Apt Elev 142
--	------------------------	---

RNAV (GPS) RWY 11

ST MARY'S COUNTY RGNL (2W6)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 11 helicopter visibility reduction below ¾ SM NA.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 620 then climbing left turn to 2000 direct GOFER and hold.

AWOS-3 119.575	PATUXENT APP CON ★ 121.0 250.3	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------------

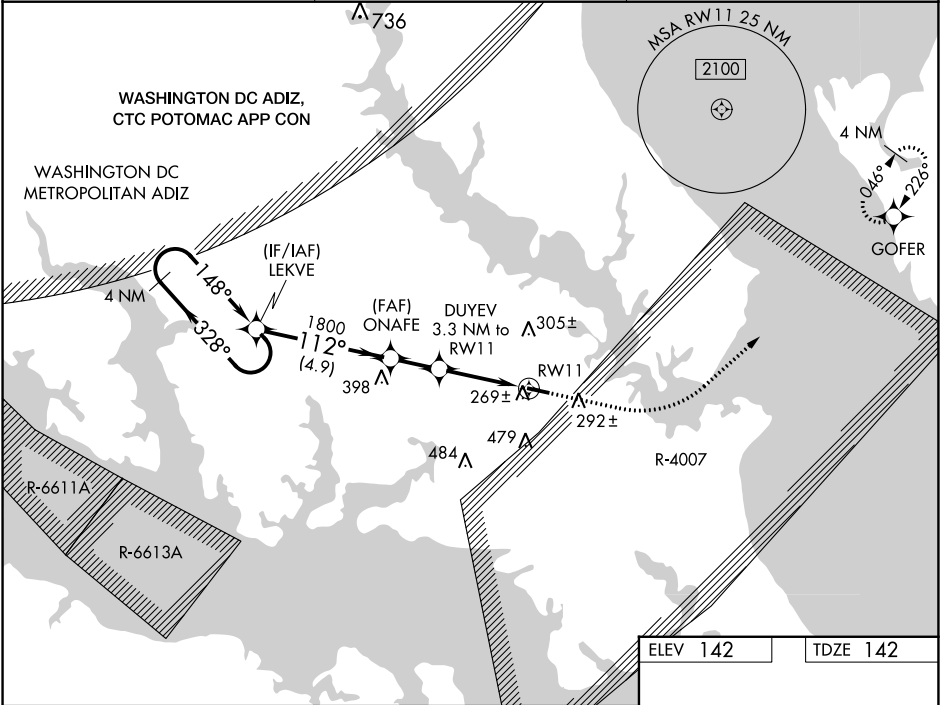

4 NM Holding Pattern		LEKVE		ONAFE		DUYEV		3.3 NM to RW11		*1.1 NM to RW11		*LNAV only	
2000		328°		112°		1800		1800		*1220		112° to RW11	
GP 3.00°		TCH 37		4.9 NM		1.8 NM		2.2 NM		1.1 NM		4150 X 75	
CATEGORY		A		B		C		D					
LPV DA				419-1		277 (300-1)							
LNAV/VNAV DA				503-1		361 (400-1)							
LNAV MDA				520-1		378 (400-1)							
CIRCLING		660-1		518 (600-1)		840-2		840-2¼		698 (700-2)		698 (700-2¼)	
												REIL Rwy 11 and 29 0	
												MIRL Rwy 11-29 0	