


WAAS CH <b>56240</b> <b>W31A</b>	APP CRS <b>306°</b>	Rwy Idg TDZE <b>2627</b> Apt Elev <b>2634</b>
--	------------------------	---

RNAV (GPS) RWY 31

FRANK WILEY FLD (MLS)

RNP APCH - GPS.	MISSED APPROACH: Climb to 6000 direct EGITE and hold, continue climb-in-hold to 6000.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C.	

ASOS <b>135.575</b>	SALT LAKE CENTER <b>126.85 305.2</b>	UNICOM <b>123.0 (CTAF) 1</b>
------------------------	---	---------------------------------

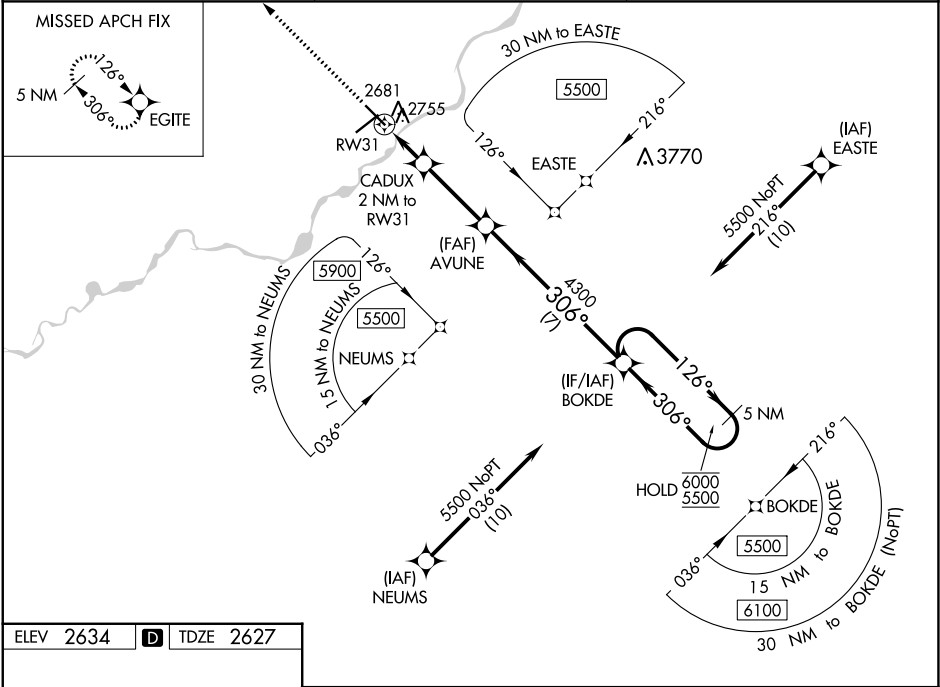

MIRL Rwy 4-22 and 13-31  
REIL Rwy 4, 13, 22 and 31

6000
↑

EGITE

CADUX  
2 NM to RW31

AVUNE  
4300

BOKDE

5 NM Holding Pattern

126° → 6000  
← 306° 5500

GP 3.00°  
TCH 43

1.1 NM  
0.9 NM  
3.1 NM  
7 NM

CATEGORY	A	B	C	D
LPV DA	2877-1 250 (300-1)			
LNAV/VNAV DA	2917-1 290 (300-1)			
LNAV MDA	3020-1	393 (400-1)	3020-1½	393 (400-1½)
CIRCLING	3060-1 426 (500-1)	3100-1 466 (500-1)	3160-1½ 526 (600-1½)	3320-2¼ 686 (700-2¼)