

WAAS CH 82318 W28A	APP CRS 276°	Rwy Idg TDZE Apt Elev	5509 379 385
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28


BALDWIN COUNTY RGNL (MLJ)

RNP APCH-GPS.


▼ Baro-VNAV and VDP NA when using Middle Georgia Rgnl altimeter setting. Rwy 28 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Middle Georgia Rgnl altimeter setting: increase LPV DA to 754 feet and visibility $\frac{1}{8}$ SM, LNAV/VNAV DA to 902 feet and visibility $\frac{1}{4}$ SM; increase all MDAs 100 feet and visibility LNAV Cats C/D $\frac{1}{4}$ SM and Circling Cat C $\frac{1}{2}$ SM.


MISSED APPROACH:
Climb to 3000 direct
IBUDY and hold.

AWOS-3 120.925	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.975 (CTAF) 0
--------------------------	---	-----------------------------------

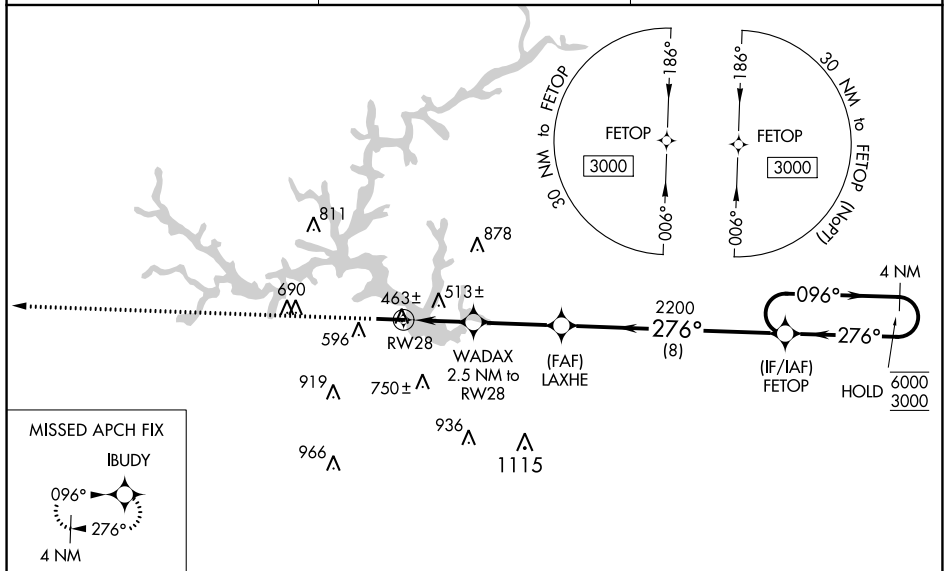

ELEV	385		TDZE	379
------	-----	--	------	-----

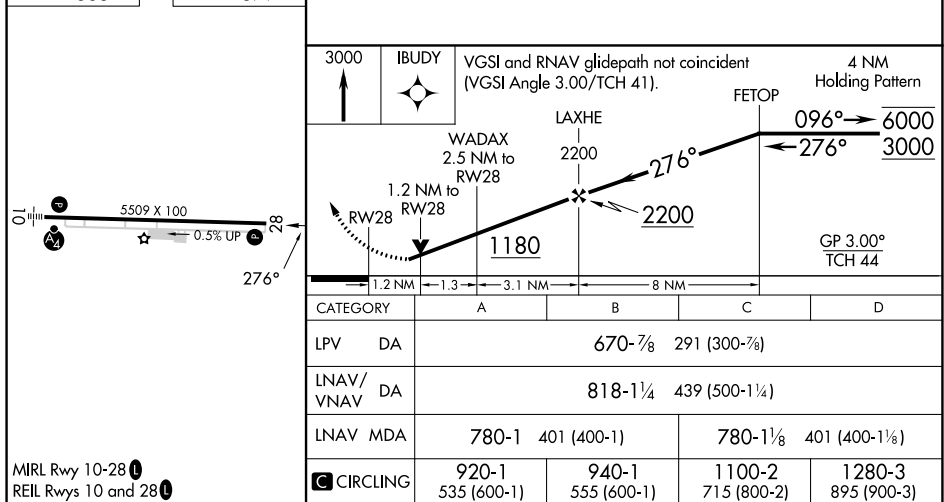

CATEGORY		A	B	C	D
LPV	DA	670-7/8 291 (300-7/8)			
RNAV/ VNAV	DA	818-1 1/4 439 (500-1 1/4)			
RNAV	MDA	780-1 401 (400-1)		780-1 1/8 401 (400-1 1/8)	
 CIRCLING		920-1 535 (600-1)	940-1 555 (600-1)	1100-2 715 (800-2)	1280-3 895 (900-3)