

APP CRS  
**035°**

Rwy Idg  
TDZE  
**5757**

Apt Elev  
**5762**

RNP APCH.

▼


▲

Circling NA to Rwy 9 and 27. VDP NA when using Pueblo Meml altimeter setting. When local altimeter setting not received, use Pueblo Meml altimeter setting and increase all MDAs 300 feet; increase LNAV Cats A/B visibility ¼ SM and Cats C/D visibility 1 SM and Circling Cats A/B visibility ¼ SM, Cat C 1 SM, and Cat D ½ SM.

RNAV (GPS) RWY 3

PERRY STOKES (TAD)

ASOS <b>119.025</b>	DENVER CENTER <b>128.375 379.95</b>	UNICOM <b>122.8 (CTAF) 0</b>
------------------------	--	---------------------------------

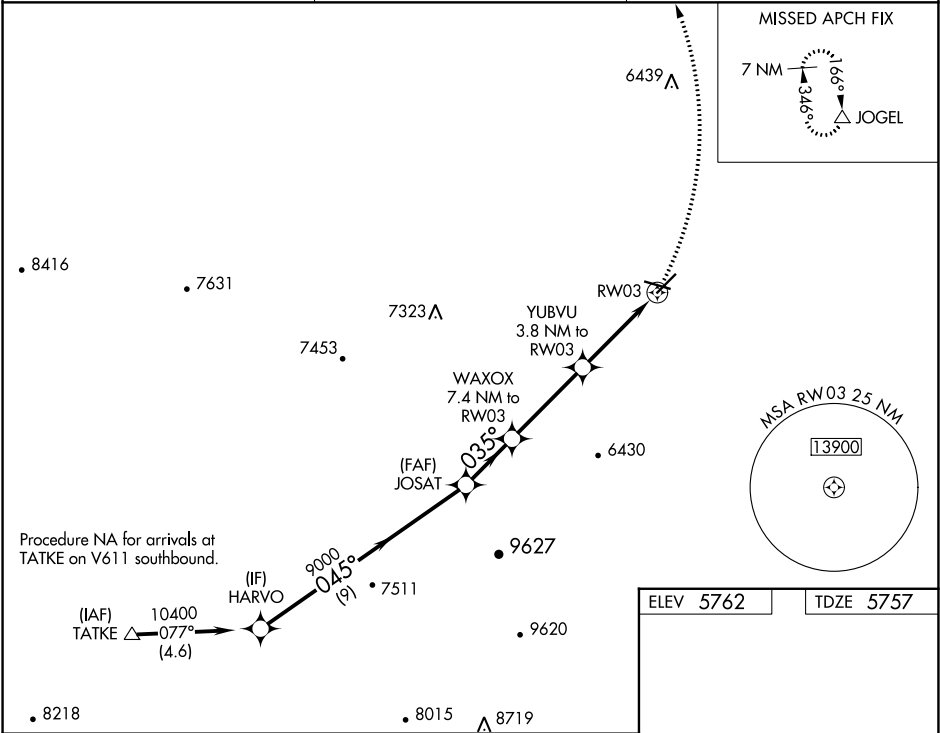

HARVO

JOSAT

WAXOX

YUBVU

RW03

10400

9000

8180

7040

8900

045°

3.10°

035°

035°

9 NM

2.4 NM

3.6 NM

1.6 NM

2.2 NM

VGSI and descent angle not coincident (VGSI Angle 3.00/TCH 40).

VGSI

TCH 36

TCH 40

8900

JOGEL

5794

5500 X 100

5500 X 100

0.6% UP

035° to RW03

CATEGORY	A	B	C	D
LNAV MDA	6500-1 743 (800-1)	6500-1¼ 743 (800-1¼)	6500-2 743 (800-2)	743 (800-2)
CIRCLING	6500-1 738 (800-1)	6500-1¼ 738 (800-1¼)	6500-2 738 (800-2)	6560-2½ 798 (800-2½)

MIRL Rwy 3-21 0

REIL Rwy 3 and 21 0