




| | | |
|--|------------------------|---|
| WAAS CH 49131 W17A | APP CRS 166° | Rwy Idg 4010 TDZE 1522 Apt Elev 1523 |
|--|------------------------|---|

RNAV (GPS) RWY 17
LANGLADE COUNTY (AIG)


Baro-VNAV NA when using Wausau Downtown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Procedure NA at night.
DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Wausau Downtown altimeter setting; increase all DA 105 feet all LPV visibilities ¼ mile, and all LNAV/VNAV visibilities ⅓ mile; increase all MDA 120 feet, LNAV Cat C and D visibilities ¼ mile, Circling Cat C visibility ½ mile, and Cat D visibility ¼ mile.

MISSED APPROACH:
Climb to 3300 direct ZABVI and hold.

| | | |
|--------------------------|--|---------------------------------|
| AWOS-3 119.075 | MINNEAPOLIS CENTER 124.4 317.7 | UNICOM 122.8 (CTAF) 0 |
|--------------------------|--|---------------------------------|

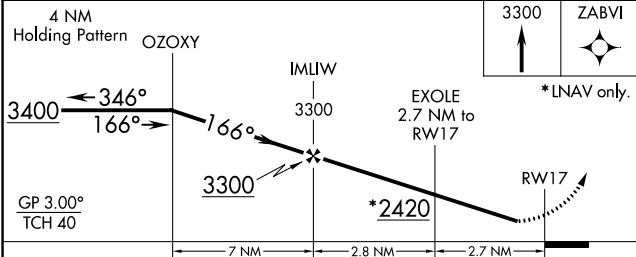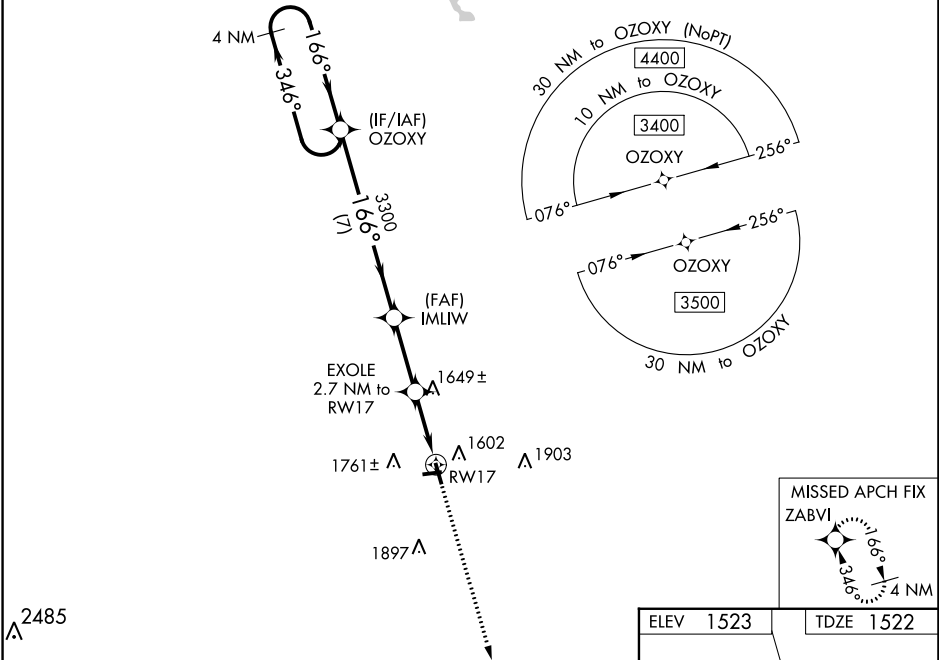

| CATEGORY | A | B | C | D |
|--------------|--------------------|----------------------------|--------------------|---|
| LPV DA | 1772-1 | 250 (300-1) | | |
| LNAV/VNAV DA | 1924-1 3/8 | 402 (400-1 3/8) | | |
| LNAV MDA | 1920-1 398 (400-1) | 1920-1 3/8 398 (400-1 3/8) | | |
| CIRCLING | 2120-1 597 (600-1) | 2120-1 1/2 597 (600-1 1/2) | 2120-2 597 (600-2) | |

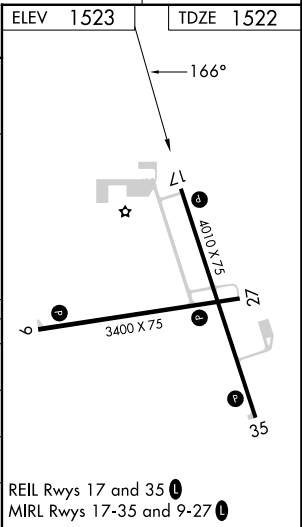

EC-3, 13 JUL 2023 to 10 AUG 2023

EC-3, 13 JUL 2023 to 10 AUG 2023