


WAAS CH 62944 W28A	APP CRS 278°	Rwy Idg 3795 TDZE 881 Apt Elev 895
--	------------------------	---


RNAV (GPS) RWY 28
MARLETTE TOWNSHIP (77G)

RNP APCH - GPS. ▼ ▲ NA Rwy 28 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. Use Caro altimeter setting, when not received, use Bad Axe altimeter setting and increase LPV DA to 1216 feet; increase LNAV/VNAV DA to 1279 feet; increase all MDAs 20 feet and Circling visibility Cat D ¼ SM. Circling Rwy 10, 19 NA at night.	MISSED APPROACH: Climb to 3000 direct QAJJU and hold.
---	--

CFS AWOS-3 119.275	CLEVELAND CENTER 127.7 290.425	UNICOM 122.8 (CTAF) 0
------------------------------	--	---------------------------------

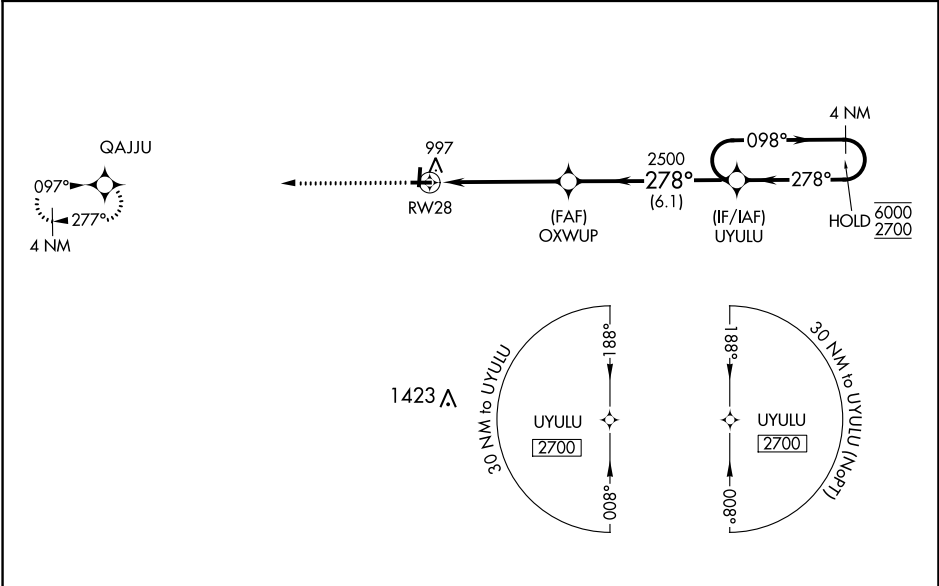

ELEV 895	TDZE 881
----------	----------

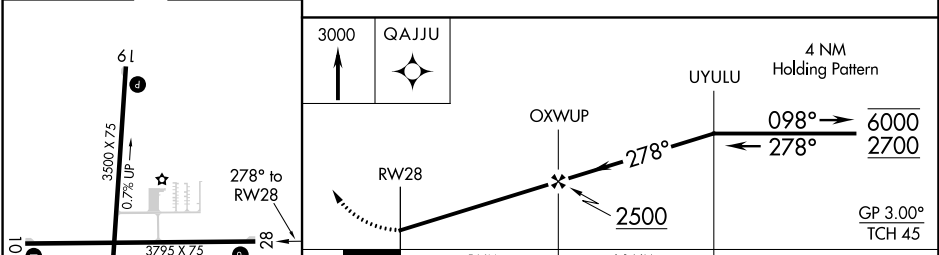

MIRL Rwy 1-19 and 10-28 0	3000 QAJJU	4 NM Holding Pattern
61	OXWUP	UYULU
3500 X 75	278°	098° → 6000
0.7% UP	2500	← 278° 2700
3795 X 75	5 NM	GP 3.00°
1	6.1 NM	TCH 45
10	CATEGORY	A B C D
28	LPV DA	1199-1 318 (400-1)
	LNAV/VNAV DA	1262-1½ 381 (400-1½)
	LNAV MDA	1340-1 459 (500-1) 1340-1¾ 459 (500-1¾)
	CIRCLING	1420-1 525 (600-1) 1420-1½ 525 (600-1½) 1560-2 665 (700-2)