




Dresser-Rand High Speed Reciprocating Compressors

A Legacy of Compression Excellence

For over 100 years, Siemens Energy and its predecessor companies have been leaders in manufacturing reciprocating compressors for gas field and process applications.

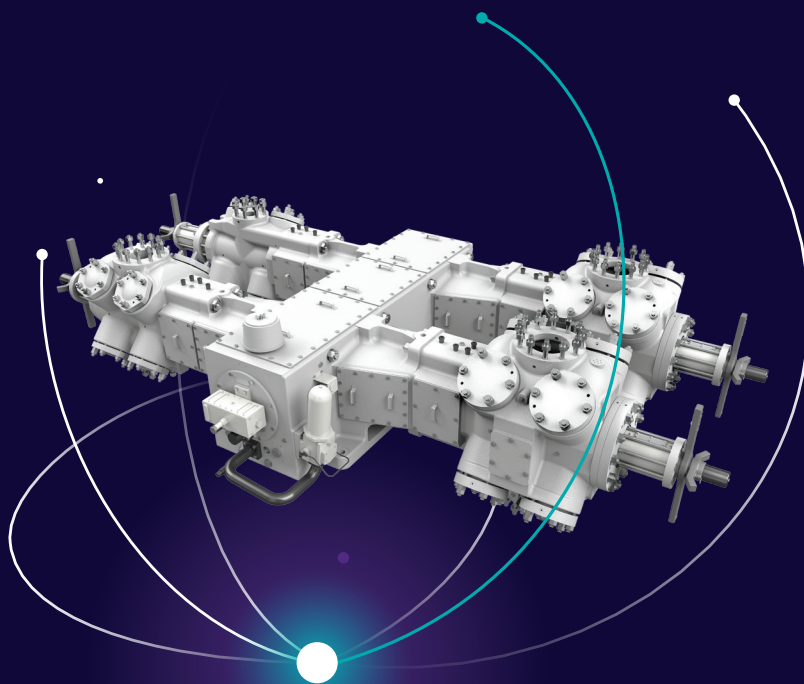

23,500+ Units Delivered Globally:

Proven reliability across gas field and process compressors.



Innovative Firsts:

Pioneered the 1,000 RPM direct-connected separable gas field compressors.



Comprehensive Solutions:

Single-source responsibility for engineering, manufacturing, installation, and service.



Global Support Network:

Backed by 40+ service centers and computerized parts warehouses worldwide.



Flexibility & Performance:

Custom or standard compressors designed for efficiency, reliability, and long life.



OEM Expertise:

The industry-leading compressor OEM with unmatched experience and performance.

Upstream



- Oil Production
 - Enhanced Oil Recovery (EOR)
 - Gas Lift
 - Gas Injection
- Gas Production
 - Gas Gathering
 - Gas Processing
- Fuel Gas Boosting
- FPSO/Topsides

Midstream




- Gas Transmission
- Gas Storage
- LNG-BOG

Downstream




- Refining
- Petrochemical
- Biomass

Conventional Compressor Models




MOS™ Frames

Model	Stroke in. (mm)	Number of Cylinders	Nominal Rated Power hp (kW)	Max. Gas Load (T or C) lbs (kN)	Rated rpm
7MOS2	7 (177.8)	2	1,700 (1,268)	54,000 (240)	1,000
7MOS4	7 (177.8)	4	3,400 (2,536)	54,000 (240)	1,000
7MOS6	7 (177.8)	6	4,400 (3,311)	54,000 (240)	1,000
6MOS2	6 (152.4)	2	1,800 (1,343)	54,000 (240)	1,200
6MOS4	6 (152.4)	4	3,600 (2,685)	54,000 (240)	1,200
6MOS6	6 (152.4)	6	4,320 (3,222)	54,000 (240)	1,200
5MOS2	5 (127.0)	2	1,950 (1,454)	54,000 (240)	1,500
5MOS4	5 (127.0)	4	3,900 (2,908)	54,000 (240)	1,500
5MOS6	5 (127.0)	6	4,200 (3,132)	54,000 (240)	1,500

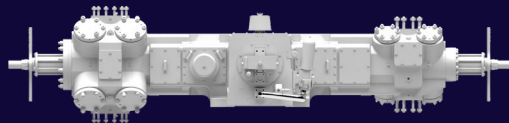

HOS™ Frames

Model	Stroke in. (mm)	Number of Cylinders	Nominal Rated Power hp (kW)	Max. Gas Load (T or C) lbs (kN)	Rated rpm
7HOS2	7 (177.8)	2	2,200 (1,641)	69,000 (307)	1,000
7HOS4	7 (177.8)	4	4,400 (3,281)	69,000 (307)	1,000
7HOS6	7 (177.8)	6	6,000 (4,475)	69,000 (307)	1,000
6HOS2	6 (152.4)	2	2,000 (1,492)	69,000 (307)	1,200
6HOS4	6 (152.4)	4	4,000 (2,983)	69,000 (307)	1,200
6HOS6	6 (152.4)	6	6,000 (4,475)	69,000 (307)	1,200
5HOS2	5 (127.0)	2	2,400 (1,790)	69,000 (307)	1,500
5HOS4	5 (127.0)	4	4,800 (3,580)	69,000 (307)	1,500
5HOS6	5 (127.0)	6	7,200 (5,370)	69,000 (307)	1,500



HOSS™ Frames

Model	Stroke in. (mm)	Number of Cylinders	Nominal Rated Power hp (kW)	Max. Gas Load (T or C) lbs (kN)	Rated rpm
7HOSS2	7 (177.8)	2	2,800 (2,088)	87,000 (387)	1,000
7HOSS4	7 (177.8)	4	5,600 (4,176)	87,000 (387)	1,000
7HOSS6	7 (177.8)	6	7,800 (5,816)	87,000 (387)	1,000
6HOSS2	6 (152.4)	2	3,100 (2,312)	87,000 (387)	1,200
6HOSS4	6 (152.4)	4	6,200 (4,623)	87,000 (387)	1,200
6HOSS6	6 (152.4)	6	8,700 (6,488)	87,000 (387)	1,200
5HOSS2	5 (127.0)	2	3,150 (2,349)	87,000 (387)	1,500
5HOSS4	5 (127.0)	4	6,300 (4,698)	87,000 (387)	1,500
5HOSS6	5 (127.0)	6	9,450 (7,047)	87,000 (387)	1,500

Contact

Local Operational Service Desk
USA / Canada +1 877 427 5777

24/7 Siemens Energy Helpdesk
+49 911 70 44 44 70 – One number worldwide

Technical Support
reciptechsupport.energy@siemens-energy.com

Parts
CP.PARTS.RNA.US@siemens-energy.com

New Units
HSRC.energy@siemens-energy.com

Upgrades & Revamps
recipupgrades.pgdr.energy@siemens-energy.com
<https://siemens-energy.secure.force.com/myAdvisor/>