


4

3


2

1


REVISIONS			
ZONE	REV	DESCRIPTION	DATE

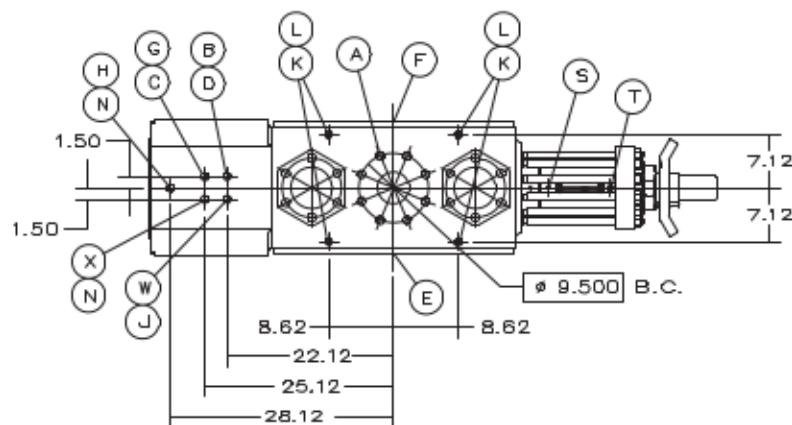

- A) 4.00-1500# FF FLANGE CONN-INLET TOP & DISCH. BOTTOM
8-1.250 STUDS ON 9.500 DIA B.C. 12.25 FLANGE DIA
- B) .25 NPT --- PACKING LUBE CONN ----- TOP
C) .25 NPT --- PACKING VENT/DRAIN CONN ----- BOTTOM
D) .75 NPT --- YOKE DRAIN CONN ----- BOTTOM
E) .25 NPT --- CYL BORE LUBE CONN ----- TOP
F) .25 NPT --- CYL BORE LUBE CONN ----- BOTTOM
G) .75 NPT --- YOKE VENT/PURGE CONN (IF REQUIRED) ----- TOP
H) .38 NPT --- PACKING COOLANT OUT CONN (IF REQUIRED) ----- TOP
J) .38 NPT --- PACKING COOLANT IN CONN (IF REQUIRED) ----- BOTTOM
K) .75 NPT --- CYL COOLANT INLET CONN (IF REQUIRED) ----- BOTTOM
L) .75 NPT --- CYL COOLANT DISCH CONN (IF REQUIRED) ----- TOP
N) .75 NPT --- SPARE CONN ----- TOP OR BOT
S) .125 NPT --- VVCP ROD PKG VENT TO NON-HAZ AREA ----- TOP
T) .125 NPT --- GREASE FITTING ----- TOP
W) .25 NPT --- SCRAPER PURGE CONN (IF REQUIRED) ----- TOP
X) .25 NPT --- PACKING PURGE CONN (IF REQUIRED) ----- TOP
AD) .50 NPT --- OUTER END INDICATOR CONN ----- SIDE
AE) .50 NPT --- FRAME END INDICATOR CONN ----- SIDE
AJ) .750-10UNC-3B THD, CYLINDER SUPPORT ----- BOTTOM
AP) .625-11UNC-3B YOKE SUPPORT ----- BOTTOM
BB) .750 NPT-----RTD CONN. (IF REQUIRED)

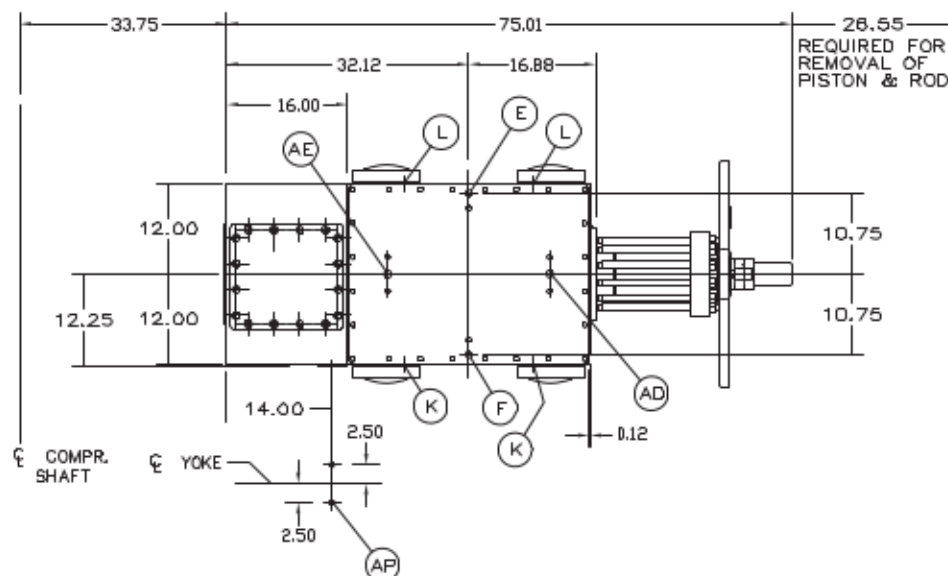

TOTAL WEIGHT APPROX. 3250 LBS

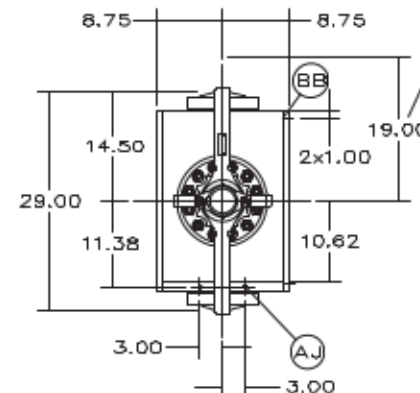CLEARANCE REQUIRED
FOR VALVE
REMOVAL-TYPICAL

CHG TO: 72 124 149



THIRD ANGLE PROJECTION

DRAWN DATE 04SEP06

K.DAVISON

CHECKED DATE 04SEP06

B.BENNITT

APPROVED DATE 04SEP06

B.BENNITT

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE IN INCHES

SIZE	STROKE	TYPE	
6.00	ALL	HOSS	
NAME OF PART			
OUTLINE - 6.00" CYLINDER			
SIZE	FEDERAL SUPPLY CODE	DRAWING NO.	REV.
C		HIH00672	00
SCALE 1:12		WT.	SHEET 10F1

DWG NO HIH00672 SH 1

FORM PLUMB-MKE