


4

3


2

1


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	01	ADDED NOTE FOR APPROX. WEIGHT	30JUL08	KMD/BJN

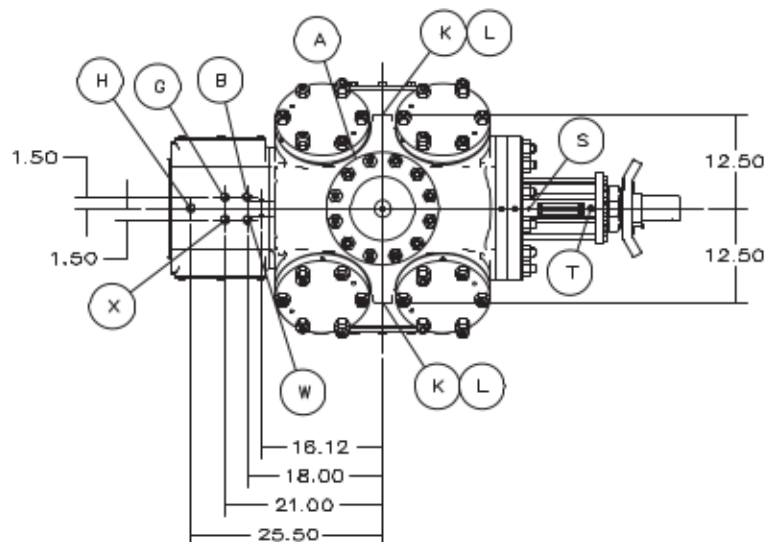

- A) 8.00-400# FF FLANGE CONN-INLET TOP & DISCH. BOTTOM
12-1.000-8UNC-3A STUDS ON 13.000 DIA B.C. 15.00 FLANGE DIA
- B) .25 NPT --- PACKING LUBE CONN --- TOP
C) .25 NPT --- PACKING VENT/DRAIN CONN --- BOTTOM
D) .75 NPT --- YOKE DRAIN CONN --- BOTTOM
E) .25 NPT --- CYL BORE LUBE CONN --- TOP
F) .25 NPT --- CYL BORE LUBE CONN --- BOTTOM
G) .75 NPT --- YOKE VENT/PURGE CONN --- TOP
H) .38 NPT --- PACKING COOLANT OUT CONN --- TOP
J) .38 NPT --- PACKING COOLANT IN CONN --- BOTTOM
K) .75 NPT --- CYL COOLANT INLET CONN --- BOTTOM
L) .75 NPT --- CYL COOLANT DISCH CONN --- TOP
N) .75 NPT --- SPARE CONN --- BOTTOM
S) .12 NPT --- VVCP ROD PKG VENT TO NON-HAZ AREA --- TOP
T) .12 NPT --- GREASE FITTING --- TOP
W) .25 NPT --- SCRAPER PURGE CONN (IF REQUIRED) --- TOP
X) .25 NPT --- PACKING PURGE CONN (IF REQUIRED) --- TOP
AD) .50 NPT --- OUTER END INDICATOR CONN --- SIDE
AE) .50 NPT --- FRAME END INDICATOR CONN --- SIDE
AJ) .750-10UNC-3B THD CYLINDER SUPPORT --- BOTTOM
AP) .625-11UNC-3B YOKE SUPPORT --- BOTTOM

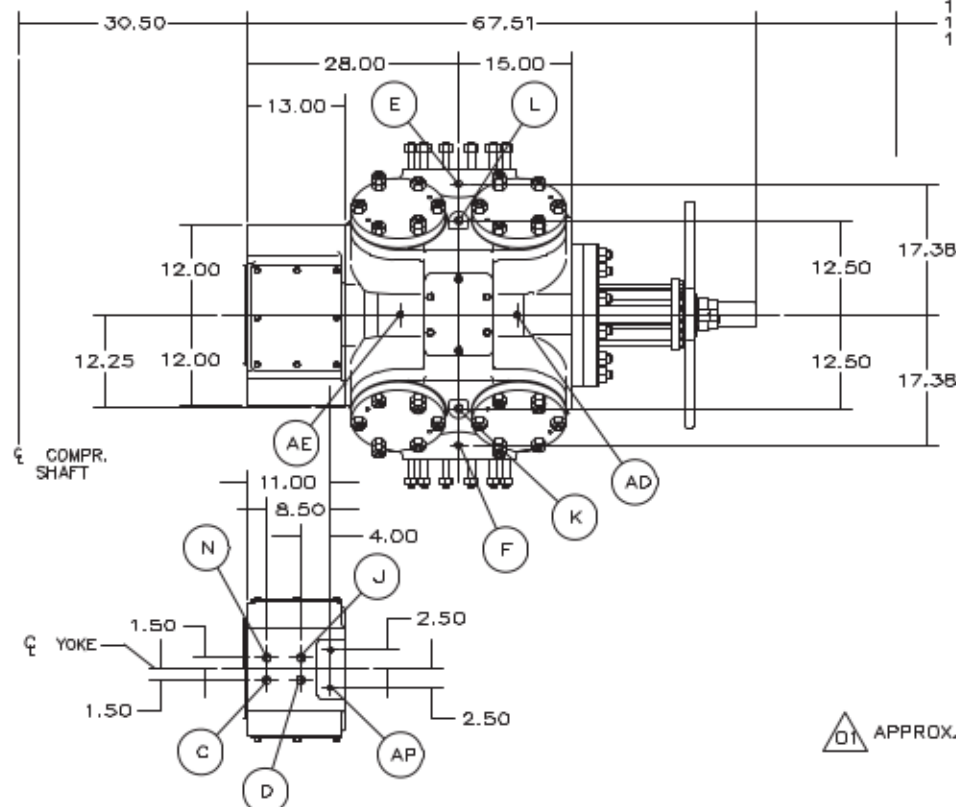


19.16 (5.0" STR)
18.66 (6.0" STR)
18.16 (7.0" STR)
REQUIRED FOR
REMOVAL OF
PISTON & ROD

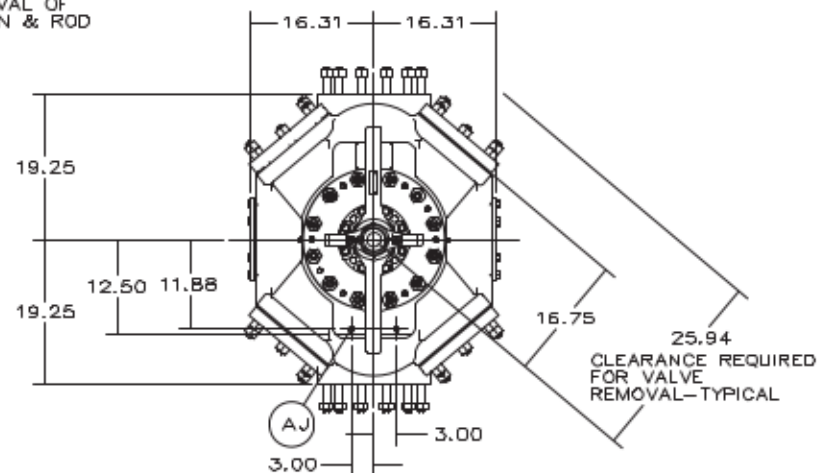

△ APPROX. WEIGHT = 3550 LBS

CHG TO: 80 149



THIRD ANGLE PROJECTION

DRAWN K.DAVISON DATE 28MAR08

CHECKED B.NIESSING DATE 28MAR08

APPROVED B.NIESSING DATE 28MAR08

UC PART

SIZE		STROKE	TYPE
14.00/15.00IN		ALL	HOS
NAME OF PART			
OUTLINE - 14.00 CYL/13" DP/VVCP			
SIZE	FEDERAL SUPPLY CODE	DWG NO.	REV.
C	---	HIH01402	01
SCALE 1:12		WT.	SHEET 1 OF 1

DWG NO. HIH01402

SH 1

A