


| REVISIONS | | | | |
|---|---|---|---|---|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |

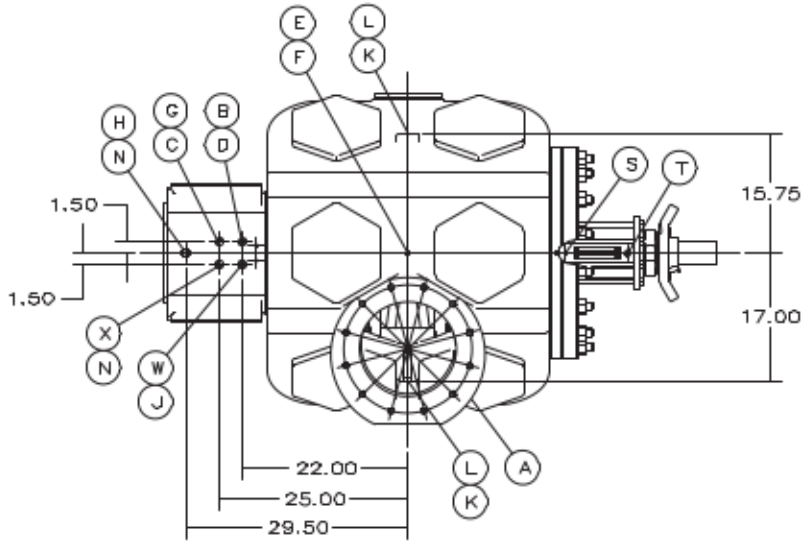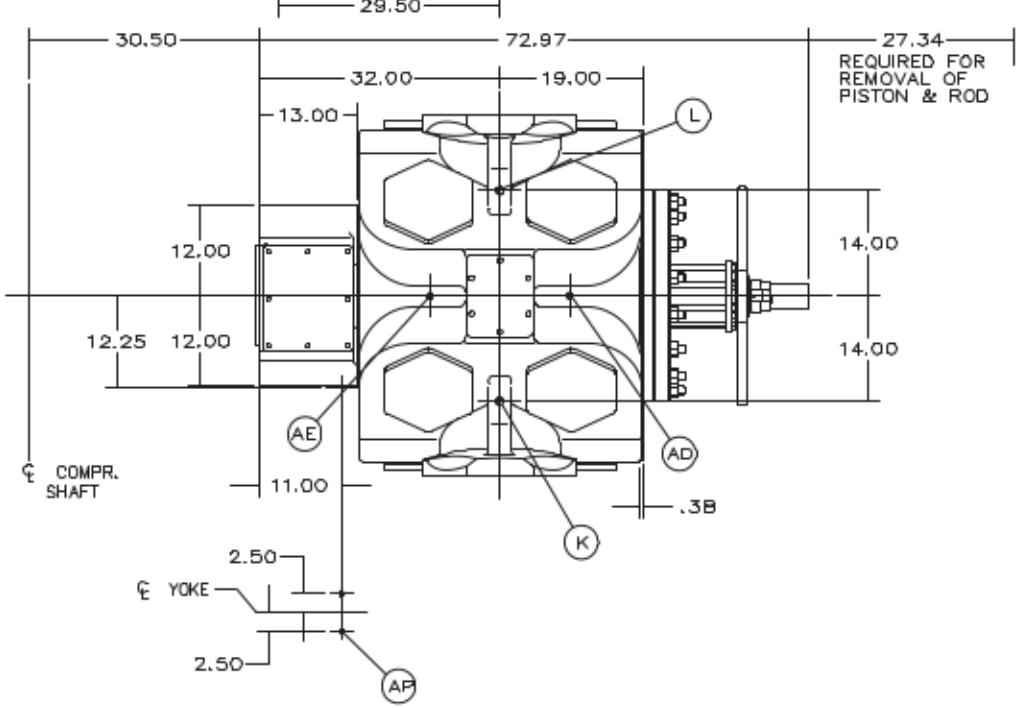


A) 12.00"–150# FF FLANGE CONN–INLET TOP & DISCH BOTTOM
12–.875 BOLTS ON 17.00 DIA B.C. 20.50 FLANGE DIA
B) .25 NPT –– PACKING LUBE CONN ---------- TOP
C) .25 NPT –– PACKING VENT/DRAIN CONN ---------- BOTTOM
D) .75 NPT –– YOKE DRAIN CONN ---------- BOTTOM
E) .25 NPT –– CYL BORE LUBE CONN ---------- TOP
F) .25 NPT –– CYL BORE LUBE CONN ---------- BOTTOM
G) .75 NPT –– YOKE VENT/PURGE CONN (IF REQUIRED)----- TOP
H) .38 NPT –– PACKING COOLANT OUT CONN (IF REQUIRED)– TOP
J) .38 NPT –– PACKING COOLANT IN CONN (IF REQUIRED)–– BOTTOM
K) .75 NPT –– CYL COOLANT INLET CONN (IF REQUIRED)––– BOTTOM
L) .75 NPT –– CYL COOLANT DISCH CONN (IF REQUIRED)––– TOP
N) .75 NPT –– SPARE CONN ---------- TOP OR BOT
S) .125 NPT –– VVCP ROD PKG VENT TO NON–HAZ AREA ----- TOP
T) .125 NPT –– GREASE FITTING ---------- TOP
W) .25 NPT –– SCRAPER PURGE CONN (IF REQUIREDO------- TOP
X) .25 NPT –– PACKING PURGE CONN (IF REQUIRED)------- TOP
AD) .50 NPT –– OUTER END INDICATOR CONN ---------- SIDE
AE) .50 NPT –– FRAME END INDICATOR CONN ---------- SIDE
AJ) .750–10UNC–3B THD, CYLINDER SUPPORT ---------- BOTTOM SIDE
AP) .625–11UNC–3B THD, YOKE SUPPORT ---------- BOTTOM
BB) .75 NPT –– RTD CONN. (IF REQUIRED)

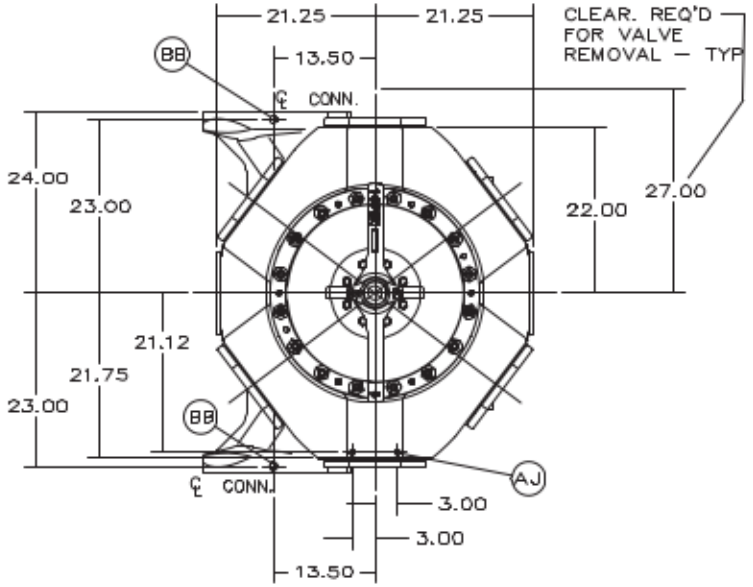


TOTAL WEIGHT: APPROX. 6400 LBS.

CHG TO: 72 80 149

THIRD ANGLE PROJECTION

| | | | |
|---|---|---|---|
| DRAWN K.DAVISON | DATE 02SEP08 | SIZE 23.00 | STROKE ALL | TYPE HOS |
| CHECKED B.NIESSING | DATE 02SEP08 | NAME OF PART OUTLINE – CYLINDER W/VVCP | | |
| APPROVED B.NIESSING | DATE 02SEP08 | SIZE C | FEDERAL SUPPLY CODE | DWG NO. HIHO2311 | REV. 00 |
| UG PART | | SCALE 1:12 | WT. | SHEET 1 OF 1 |

DWG NO HIHO2311 SH 1

NEW FLANGE-09/02