

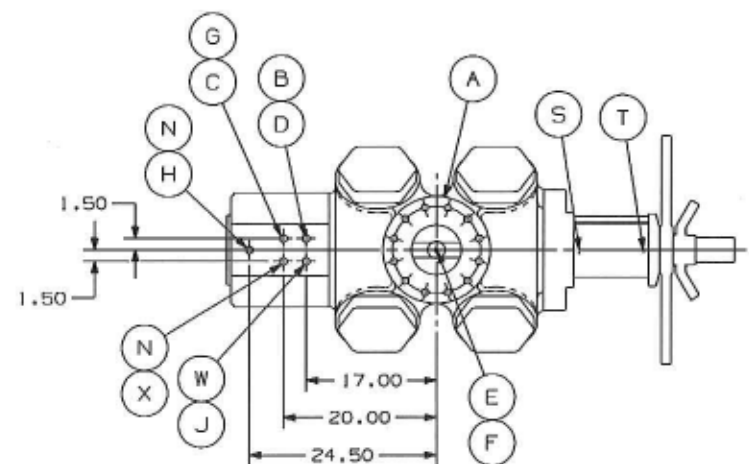


DWG NO. HJH00909		SH 1	1	
REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	01	ADDED CONNECTION BB1 2X 13.62 DIM WAS 2X 15.37; ECH000188	02JUL09	KDM/B.J.N
	02	ADDED RTD CONNECTION MAX/MIN. INSERTION DEPTH AS 9.75/3.751 ECH-PPT1308851 A.DAMANGE.	22MAR13	B.BENNETT

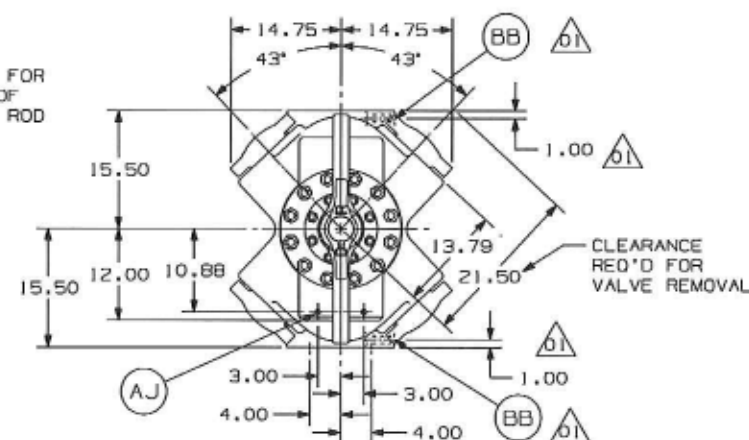

- A) 6.00-600#FF FLANGE CONN-INLET & DISCH - TOP & BOTTOM
- 12-1.000 BOLTS ON 11.500 DIA. B.C. 14.00 FLANGE DIA.
- B) .25 NPT -- PACKING LUBE CONN ----- TOP
- C) .25 NPT -- PACKING VENT/DRAIN CONN ----- BOTTOM
- D) .75 NPT -- YOKE DRAIN CONN----- BOTTOM
- E) .25 NPT -- CYL BORE LUBE CONN ----- TOP
- F) .25 NPT -- CYL BORE LUBE CONN----- BOTTOM
- G) .75 NPT -- YOKE VENT/PURGE CONN. (IF REQUIRED)---- TOP
- H) .38 NPT -- PACKING COOLANT OUT CONN.(IF REQUIRED)- TOP
- J) .38 NPT -- PACKING COOLANT IN CONN. (IF REQUIRED)- BOTTOM
- K) .75 NPT -- CYL COOLANT INLET CONN (IF REQUIRED)--- BOTTOM
- L) .75 NPT -- CYL COOLANT DISCH CONN (IF REQUIRED)--- TOP
- N) .75 NPT -- SPARE CONN. ----- TOP OR BOT
- S) .125 NPT -- VVCP ROD PKG VENT TO NON-HAZ AREA----- TOP
- T) .125 NPT -- GREASE FITTING
- W) .25 NPT -- SCRAPER PURGE CONN (IF REQUIRED)----- TOP
- X) .25 NPT -- PACKING PURGE CONN (IF REQUIRED)----- TOP
- AD) .50 NPT -- OUTER END INDICATOR CONN ----- SIDE
- AE) .50 NPT -- FRAME END INDICATOR CONN ----- SIDE
- AJ) .750-10UNC-2B THD. CYLINDER SUPPORT ----- BOTTOM SIDE
- AP) .625-11UNC-2B YOKE SUPPORT ----- BOTTOM
- AR) 1.00-8UNC-2B TAPS FOR CYLINDER SUPPORT ----- BOTTOM
- BB) .75 NPT -- RTD CONN (IF REQUIRED) (MAX. INSERTION DEPTH- 9.75") (MIN. INSERTION DEPTH- 3.75")

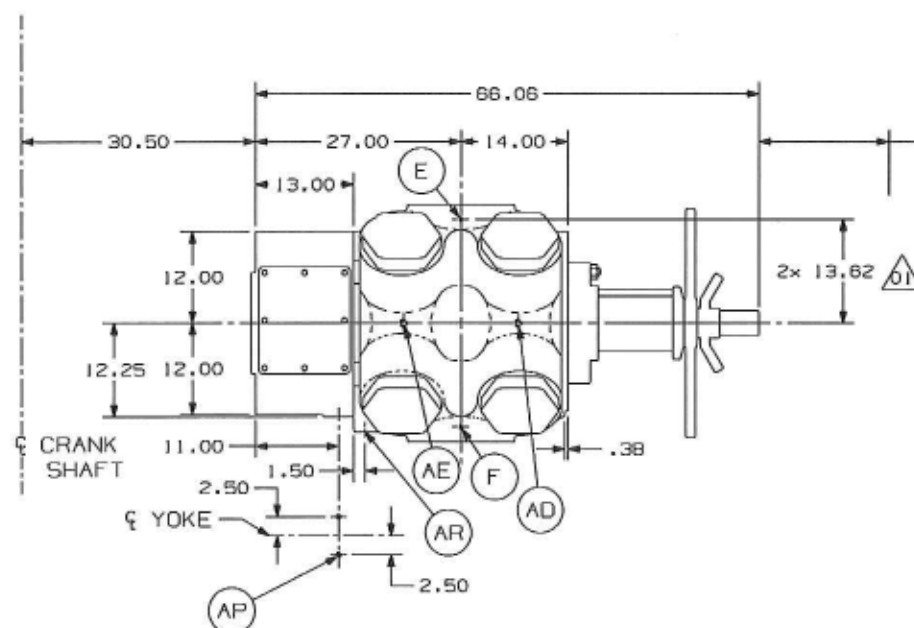

TOTAL WEIGHT: APPROX. 3100 LBS

CHG TO: 72 124 149		PART NO.	
THIRD ANGLE PROJECTION	DATE 8/14/07	SIZE 9.50	STROKE ALL
DRAWN D.BENNETT	CHECKED B.BENNETT	NAME OF PART OUTLINE - 9.50" CYL W/VVCP	
APPROVED D.BENNETT	DATE 8/14/07	SIZE D	FEDERAL SUPPLY CODE
		DWG NO. HJH00909	REV. 02
SCALE NTS		WT.	SHEET 1 OF 1