


4

3



2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	01	ADDED CALL OUT FOR FLANGE BOLTING ADDED MAX AND MIN INSERTION DEPTHS OF .9.75 AND 4.25 FOR NOTE BB) ADDED HEIGHT DIM OF 1.00 TO NPT BB) ECN-PPT120242 BCD	27JAN12	JBS

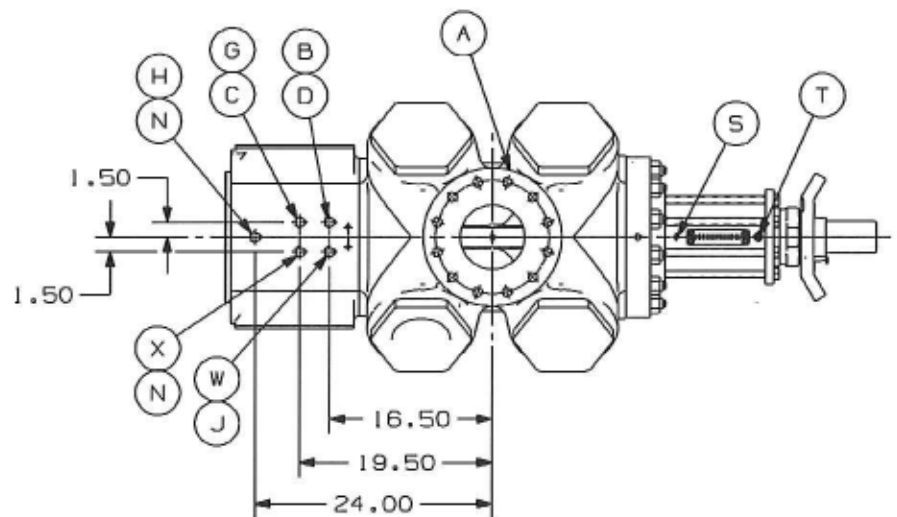


- △ 01 A) 6.00"-600# FF FLANGE CONN-INLET TOP & DISCH BOTTOM
12-1.000-8UNC-3B BOLTS ON 11.50 DIA B.C. 14.00 FLANGE DIA
B) .25 NPT -- PACKING LUBE CONN ----- TOP
C) .25 NPT -- PACKING VENT/DRAIN CONN ----- BOTTOM
D) .75 NPT -- YOKE DRAIN CONN ----- BOTTOM
E) .25 NPT -- CYL BORE LUBE CONN ----- TOP
F) .25 NPT -- CYL BORE LUBE CONN ----- BOTTOM
G) .75 NPT -- YOKE VENT/PURGE CONN (IF REQUIRED) ----- TOP
H) .38 NPT -- PACKING COOLANT OUT CONN (IF REQUIRED) ----- TOP
J) .38 NPT -- PACKING COOLANT IN CONN (IF REQUIRED) ----- BOTTOM
N) .75 NPT -- SPARE CONN ----- TOP OR BOT
S) .125 NPT -- VVCP ROD PKG VENT TO NON-HAZ AREA ----- TOP OR BOT
T) .125 NPT -- GREASE FITTING ----- TOP
W) .25 NPT -- SCRAPER PURGE CONN (IF REQUIRED) ----- TOP
X) .25 NPT -- PACKING PURGE CONN (IF REQUIRED) ----- TOP
AD) .50 NPT -- OUTER END INDICATOR CONN ----- SIDE
AE) .50 NPT -- FRAME END INDICATOR CONN ----- SIDE
AJ) .750-10UNC-3B THD, CYLINDER SUPPORT ----- BOTTOM SIDE
AP) .625-11UNC-3B THD, YOKE SUPPORT ----- BOTTOM
BB) .75 NPT -- RTD CONN. (IF REQUIRED) (MAX. INSERTION DEPTH-9.75") △ 01
(MIN INSERTION DEPTH-4.25)

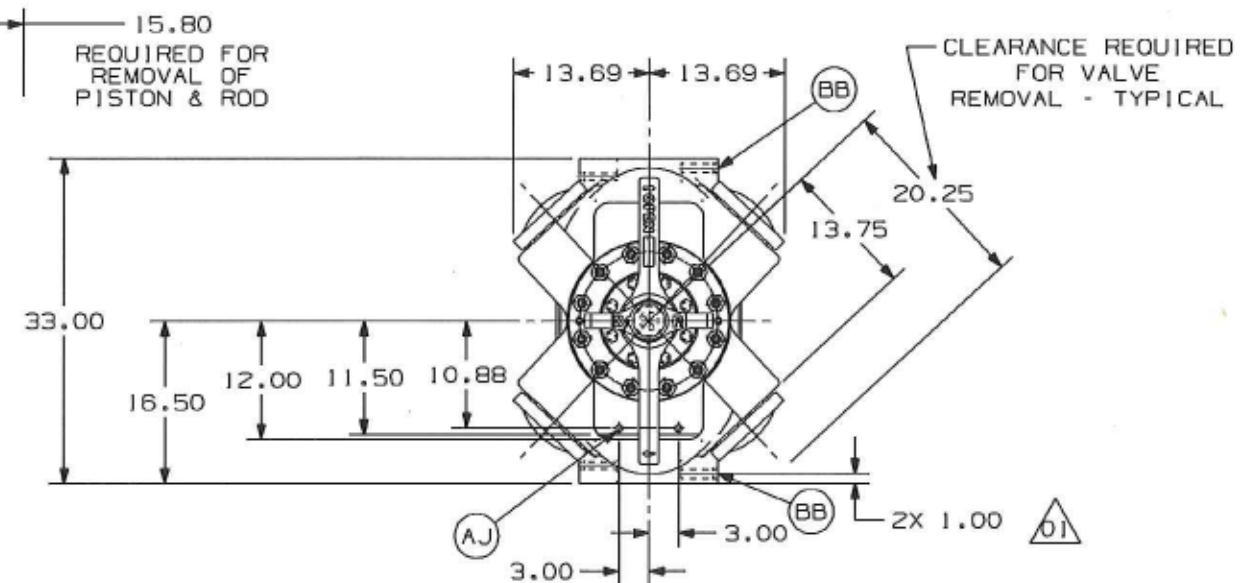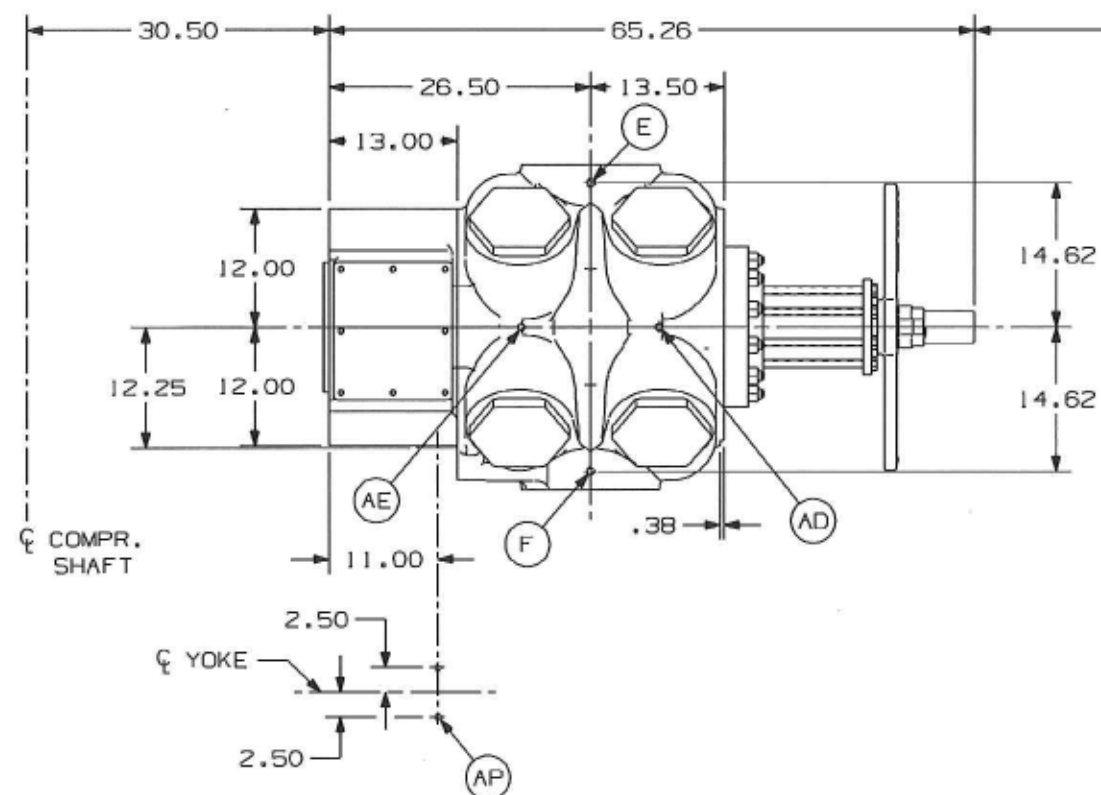

TOTAL WEIGHT: APPROX. 3250 LBS

CHG TO: 149

					
THIRD ANGLE PROJECTION		SIZE	STROKE	TYPE	
DRAWN K. DAVISON	DATE 27AUG08	11.50"	ALL	HOS	
NAME OF PART					
OUTLINE - 11.50' CYLINDER W/VVCP					
CHECKED B. BENNITT	DATE 27AUG08	SIZE	FEDERAL SUPPLY CODE	DWG NO.	REV.
APPROVED B. BENNITT	DATE 27AUG08	C		HJH01106	01
WGT PART		SCALE 1:12	WT.	SHEET 1 OF 1	

4

3

2

1

DWG NO
HJH01106
SH 1