


4

3

2



1

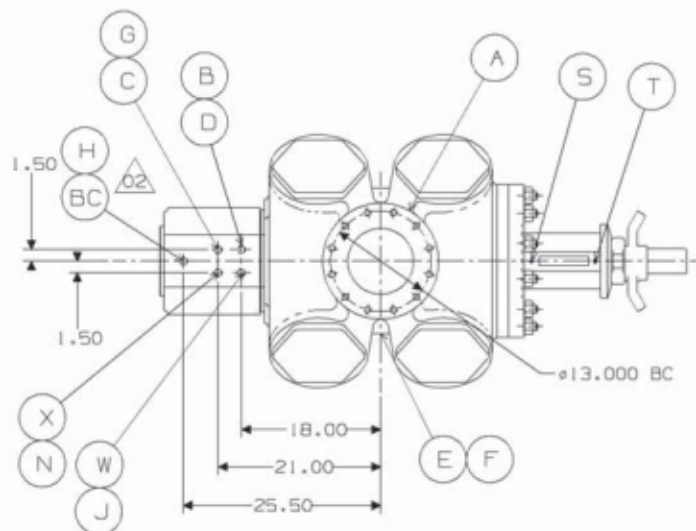

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	01	ADDED "88" CONNECTION (RTD CONN) TO INLET	16 APR 09	KMD/SJN
	02	ADDED "88" CONNECTION (RTD CONN) TO DISCH. BOTTOM	04 JAN 11	SJN

A) 8.00-300# FF FLANGE CONN-INLET TOP & DISCH. BOTTOM
12-.875 STUDS ON 13.000 DIA B.C. 15.00 FLANGE DIA

BI .25 NPT -- PACKING LUBE CONN ----- TOP
 CI .25 NPT -- PACKING VENT/DRAIN CONN ----- BOTTOM
 DI .75 NPT -- YOKE DRAIN CONN ----- BOTTOM
 EI .25 NPT -- CYL BORE LUBE CONN ----- TOP
 FI .25 NPT -- CYL BORE LUBE CONN ----- BOTTOM
 GI .75 NPT -- YOKE VENT/PURGE CONN. (IF REQUIRED) ----- TOP
 HI .38 NPT -- PACKING COOLANT OUT CONN. (IF REQUIRED) ----- TOP
 JI .38 NPT -- PACKING COOLANT IN CONN. (IF REQUIRED) ----- BOTTOM
 KI .75 NPT -- CYL COOLANT INLET CONN (IF REQUIRED) ----- BOTTOM
 LI .75 NPT -- CYL COOLANT DISCH CONN (IF REQUIRED) ----- TOP
 NI .75 NPT -- SPARE CONN. ----- TOP OR BOT
 SI .125 NPT -- VVCP ROD PKG VENT TO NON-HAZ AREA ----- TOP
 TI .125 NPT -- GREASE FITTING ----- TOP
 WI .25 NPT -- SCRAPER PURGE CONN (IF REQUIRED) ----- TOP
 XI .25 NPT -- PACKING PURGE CONN (IF REQUIRED) ----- TOP
 ADI .50 NPT -- OUTER END INDICATOR CONN ----- SIDE
 AEI .50 NPT -- FRAME END INDICATOR CONN ----- SIDE
 AJI .750-10UNC-3B THD. CYLINDER SUPPORT ----- BOTTOM SIDE
 API .625-11UNC-3B THD. YOKE SUPPORT ----- BOTTOM
 ARI .1.00-8UNC-3B THD. FOR CYLINDER SUPPORT ----- BOTTOM
 BBI .75 NPT -- RTD CONN. (IF REQUIRED) IMAX. INSERTION DEPTH-11.00" (MIN. INSERTION DEPTH-2.75") ----- BOTTOM

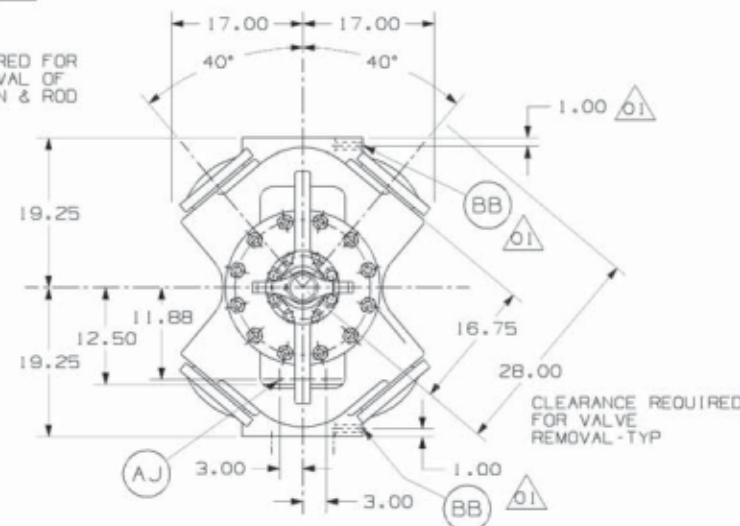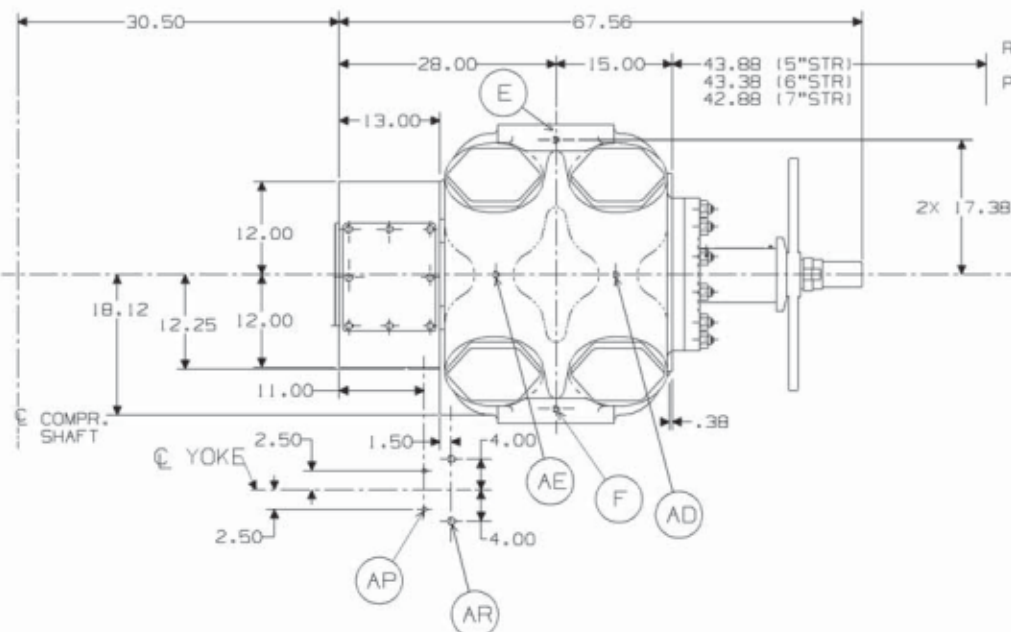

TOTAL WEIGHT: APPROX 3750 LBS

CHG TO: 72 124 149



THIRD ANGLE PROJECTION

DRAWN K.DAVISON

SIZE 15.00

STROKE ALL

TYPE HOS

CHECKED B.NIESSING

NAME OF PART

APPROVED G.F.BISEL

OUTLINE - 15.00" CYLINDER

DATE 08/27/07

SIZE FEDERAL SUPPLY CODE

DATE 08/31/07

DRAWING NO. HJH01511

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES

REV. 02

SCALE 1"=1FT

WT.

SHEET 1 OF 1

4

3

2

1